



# Handspring Visor Deluxe PDA Motherboard and Memory card I/O Replacement

Use this guide to replace the Motherboard.

Written By: David Faltemier



# INTRODUCTION

Use this guide to replace the Motherboard.

---

## TOOLS:

Phillips #00 Screwdriver (1)

Spudger (1)

Tweezers (1)



---

### Step 1 — Outside cover and stylus



- Remove the outer screen cover by releasing the top clip from the main body of the device.

## Step 2

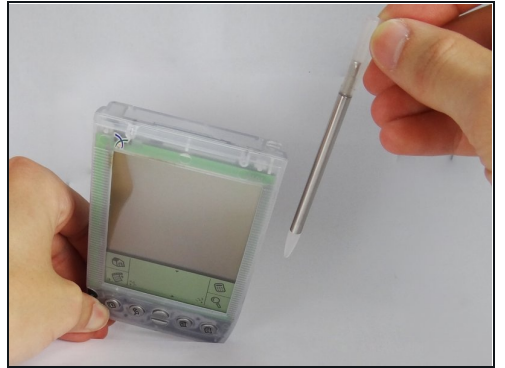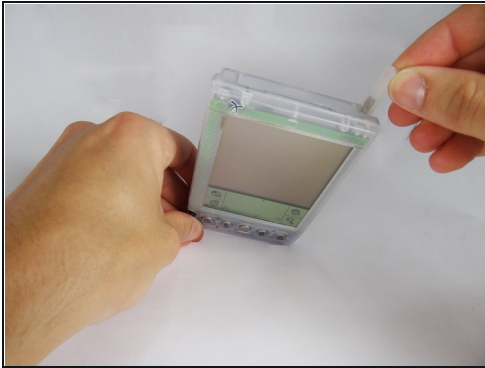


- Pull out the stylus from the top right corner of the device.

## Step 3




- Slide the memory cartridge cover up and off the device.

## Step 4 — Batteries

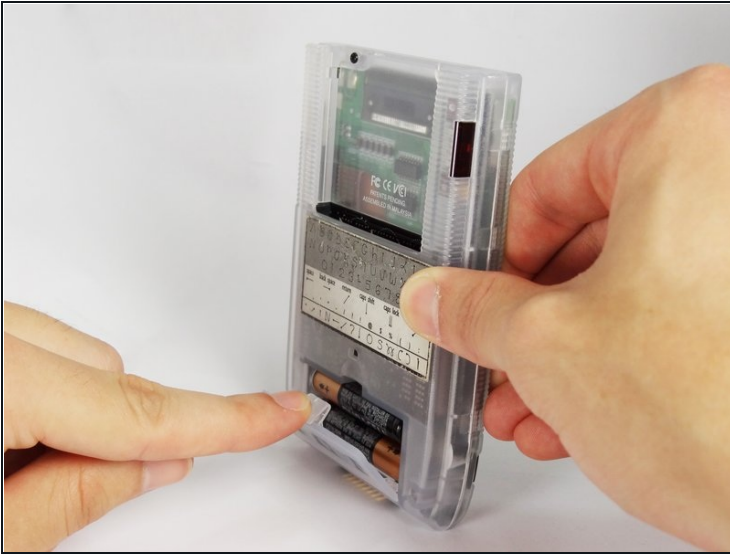

- Remove the battery cover by releasing the clip from the main body of the device.


## Step 5

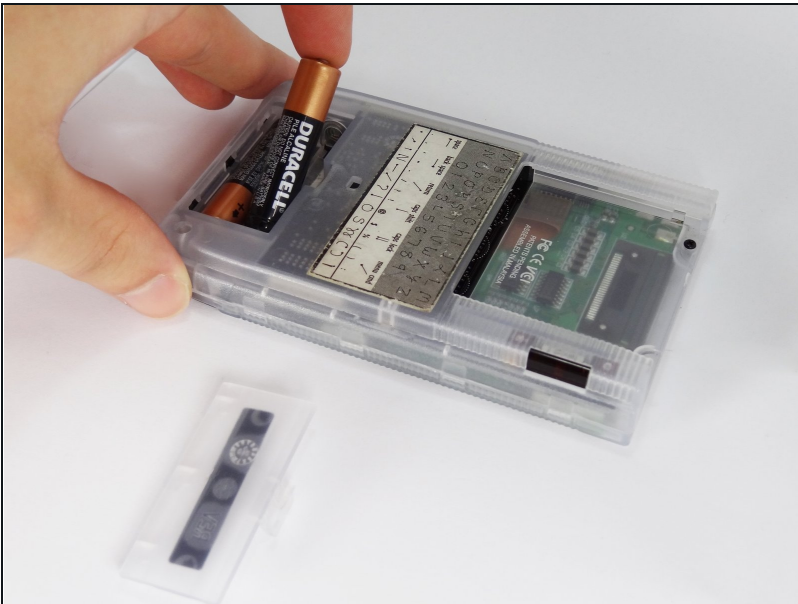

- Remove the batteries from the device.






## Step 6 — Back Cover

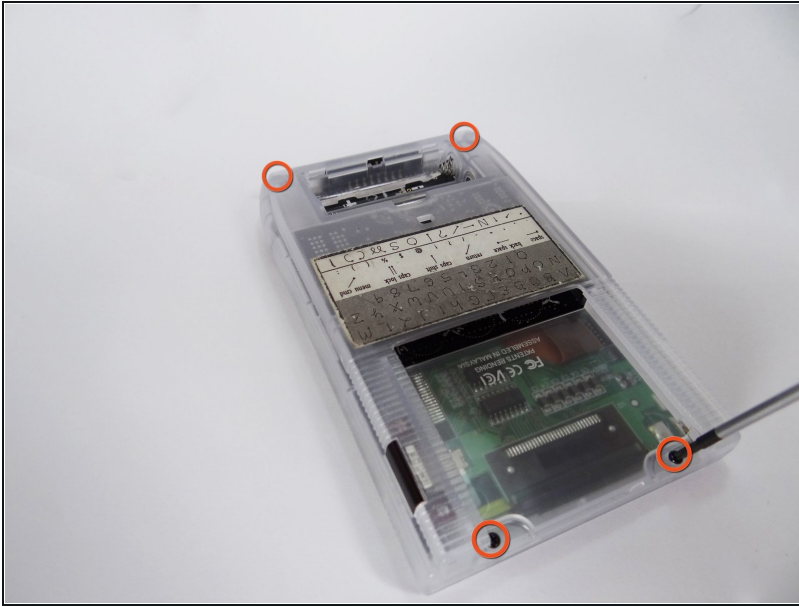

- Unscrew the four 2.94mm screws with a #00 Phillips screwdriver.
- ⓘ One end of the OEM stylus can unscrew and contains a mini #00 Phillips screwdriver.



## Step 7

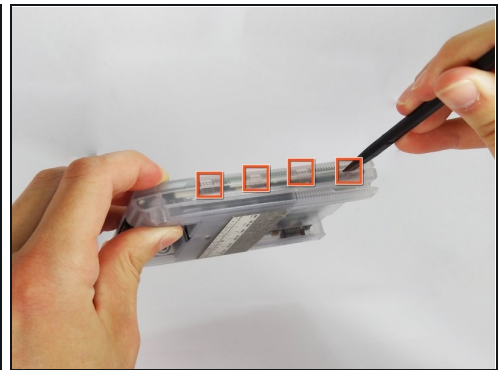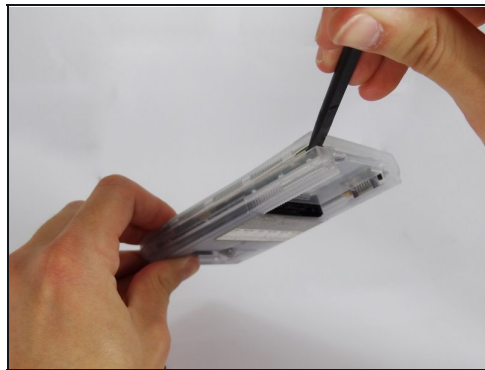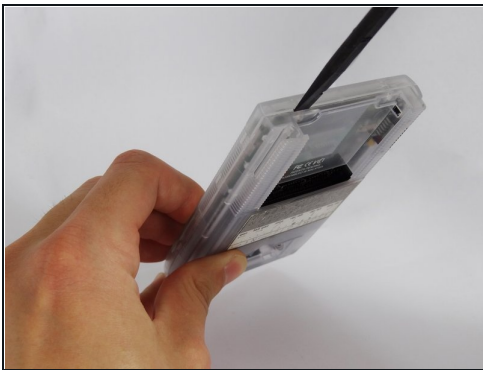

- Use the spudger to pry open the casing by applying pressure at 4 clips on both sides of the device.


⚠ Be careful while opening the casing as there is a flex strip connecting the two halves.

## Step 8

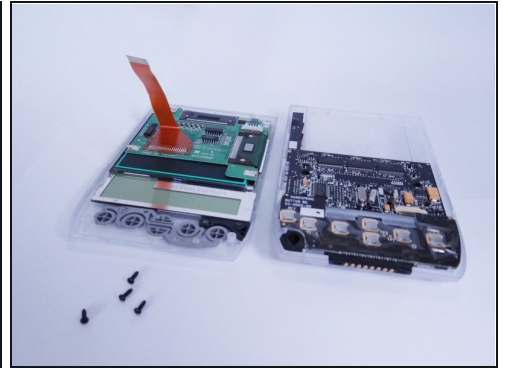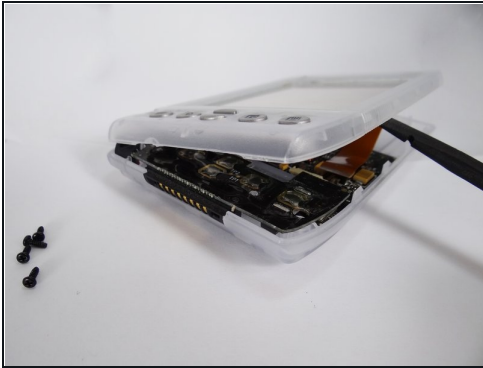




- Disconnect the flex strip from the motherboard with [tweezers](#).

## Step 9 — Button Pad and Battery Terminal

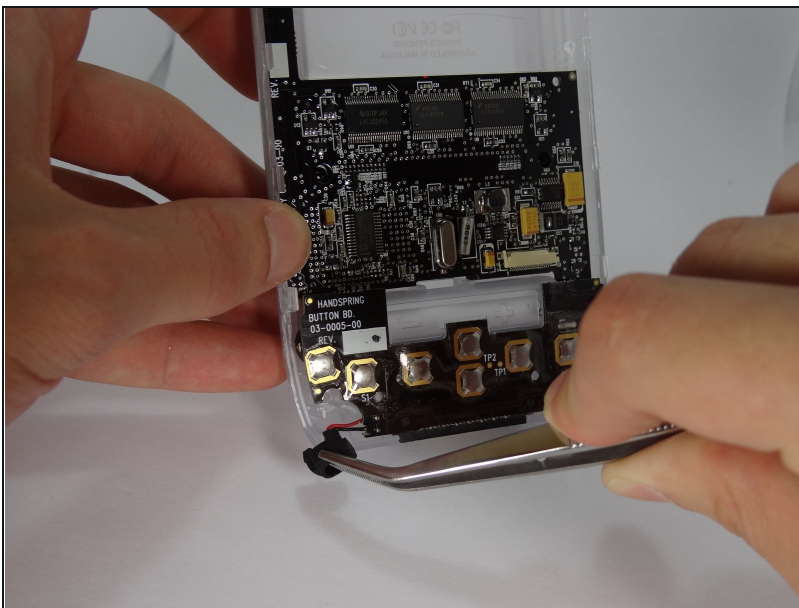


- Use [tweezers](#) to remove the power button from the back case.

## Step 10

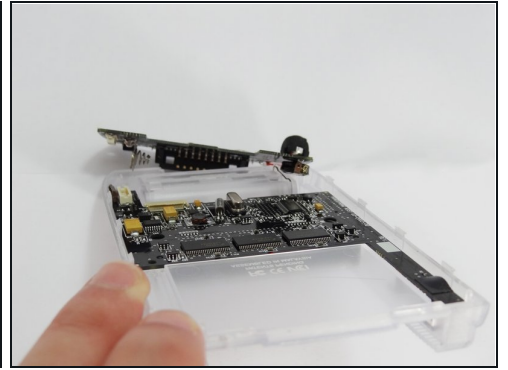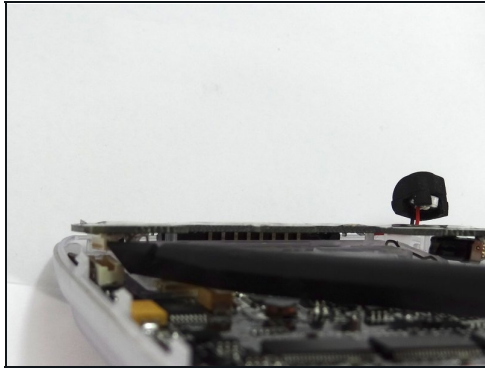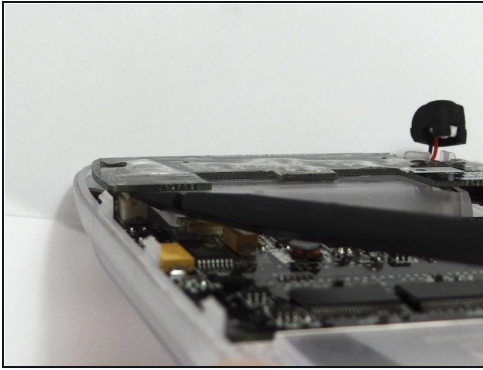



- Disconnect the button pad by using the spudger to pry it off the motherboard.
- Remove the button pad.

## Step 11 — Motherboard and Memory card I/O

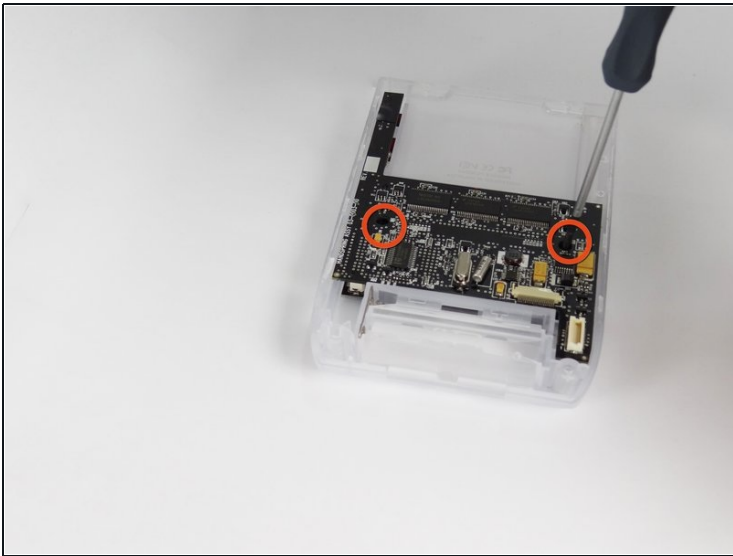

- Unscrew the two 2.94mm Phillips #00 screws that hold the motherboard in place.

## Step 12

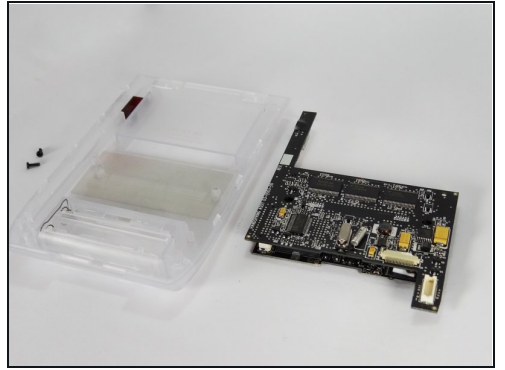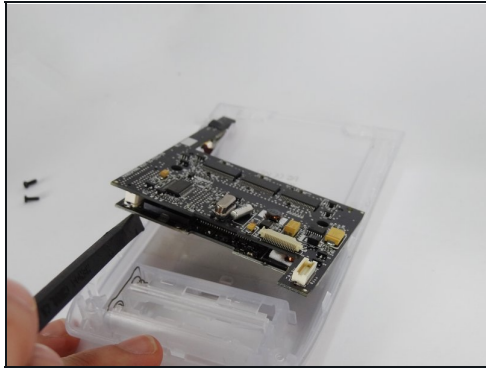

- Use the spudger to lift the motherboard from the case.

---

To reassemble your device, follow these instructions in reverse order.