




# Asus VivoBook Q302LA-BHI3T09 Display Replacement

This guide shows how to replace the 2-in-1 touchscreen display of the Asus VivoBook Q302LA-BHI3T09.

Written By: Deric Wright

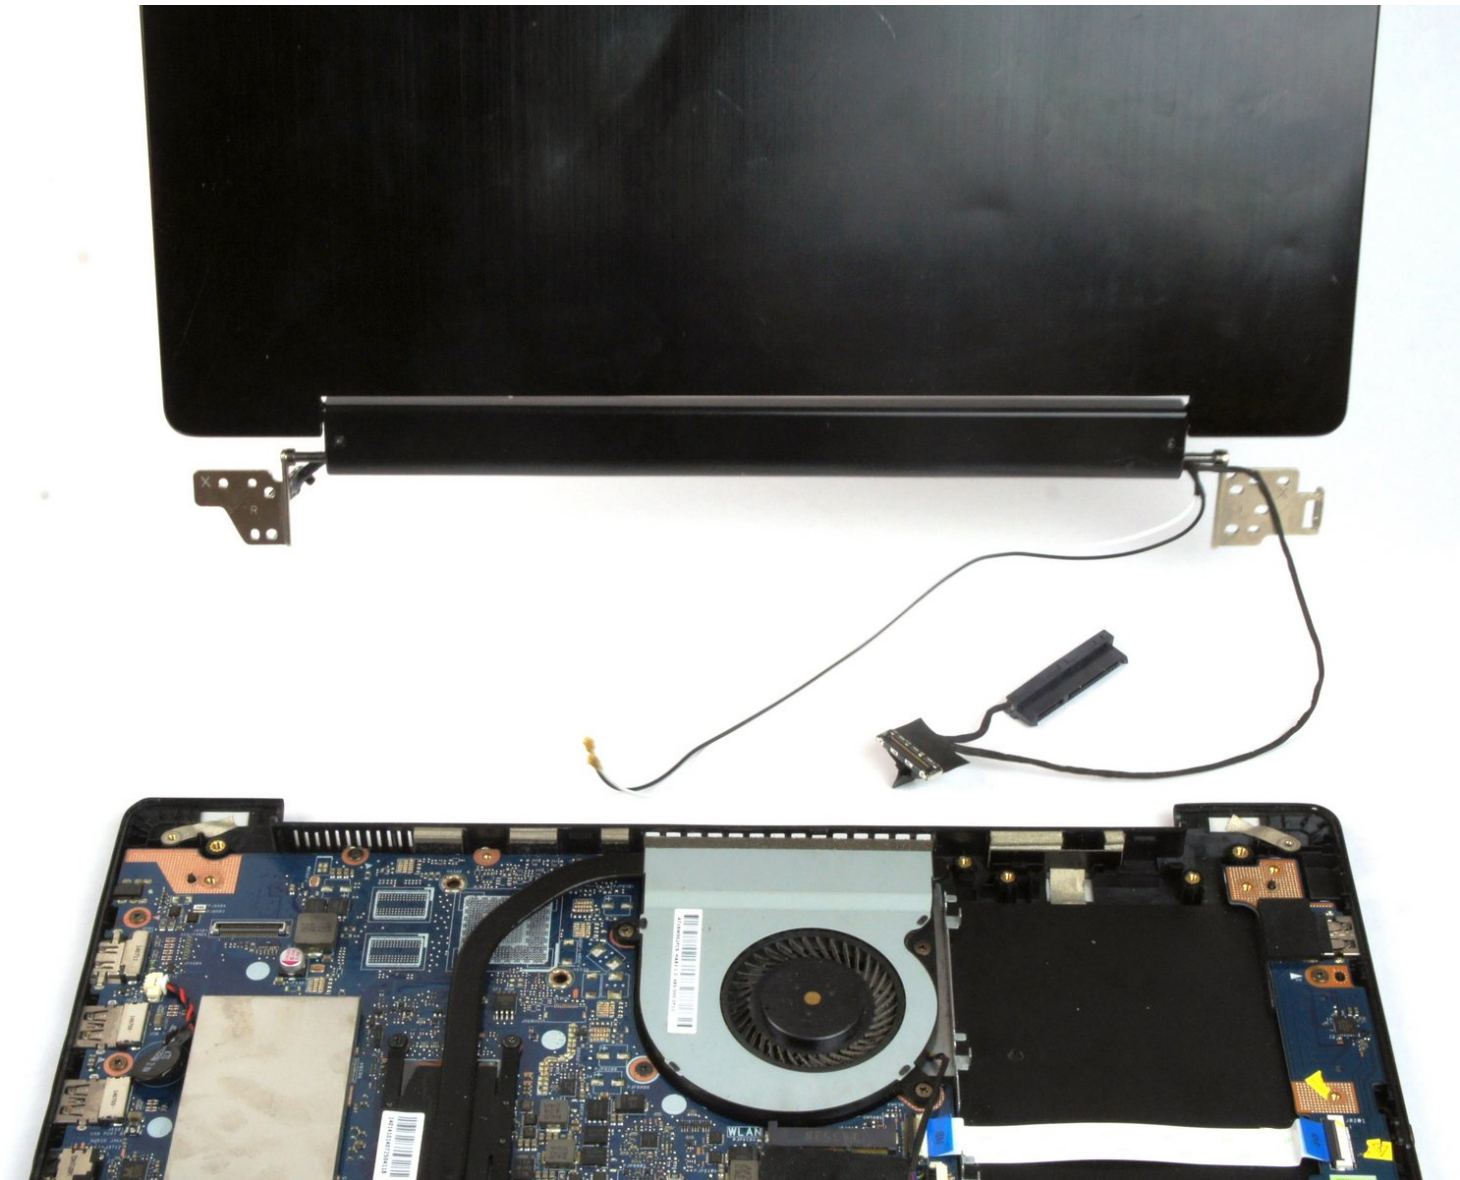

## INTRODUCTION

The 2-in-1 touchscreen display can become unresponsive or cracked due to it being used often. If the display gets damaged or becomes unresponsive, and you determine it is not a power issue, the guide shows how to replace the entire display.

---

### TOOLS:

- [iFixit Opening Tools](#) (1)
  - [JIS #0 Screwdriver](#) (1)
-

## Step 1 — Display




- i** Before doing a repair or replacement make sure the laptop is fully shut off.
- Using the JIS #0 Screwdriver, unscrew the ten 10 mm screws that hold the back casing in place

## Step 2



- Insert the flat edge of the opening tool in between the back casing to remove the back casing.
- ⚠ Try to use the opening tool at multiple points. Lifting the back casing abruptly could damage the laptop.


## Step 3

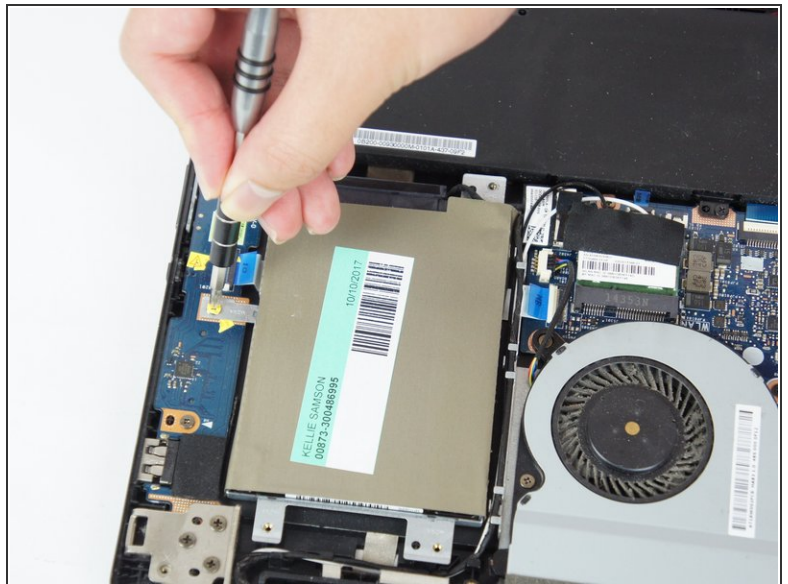

- Using the JIS #0 Screwdriver, remove the five 3.0 mm screws that hold down the hard drive casing.




## Step 4

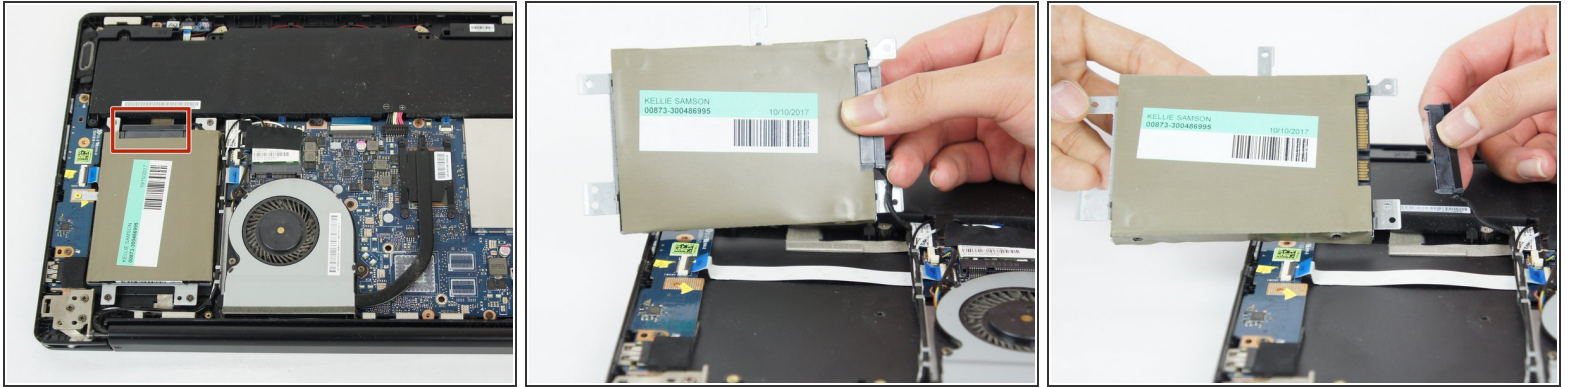


- Lift the hard drive up and remove the power supply cable connected to it.
- ⚠ Make sure to pull on the plastic head and not the actual wires to prevent tearing them.

## Step 5

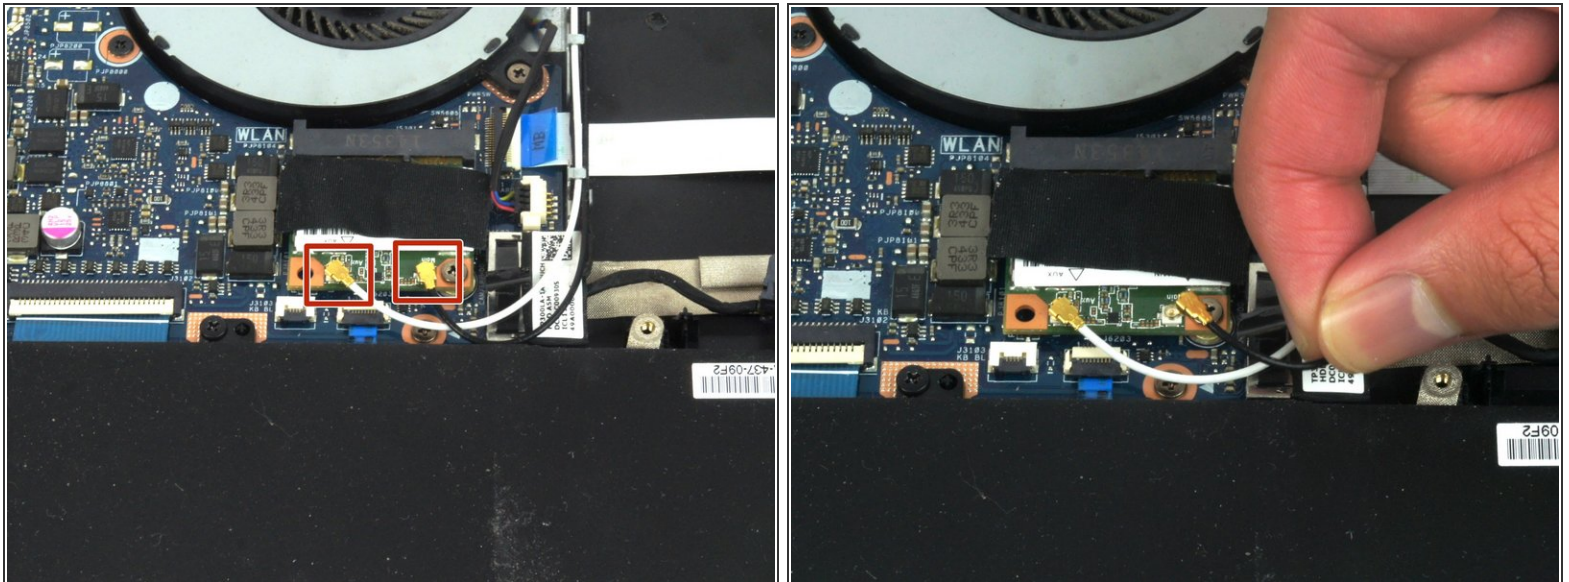


- Disconnect the white and black wires attached to the Wi-Fi chip.

## Step 6

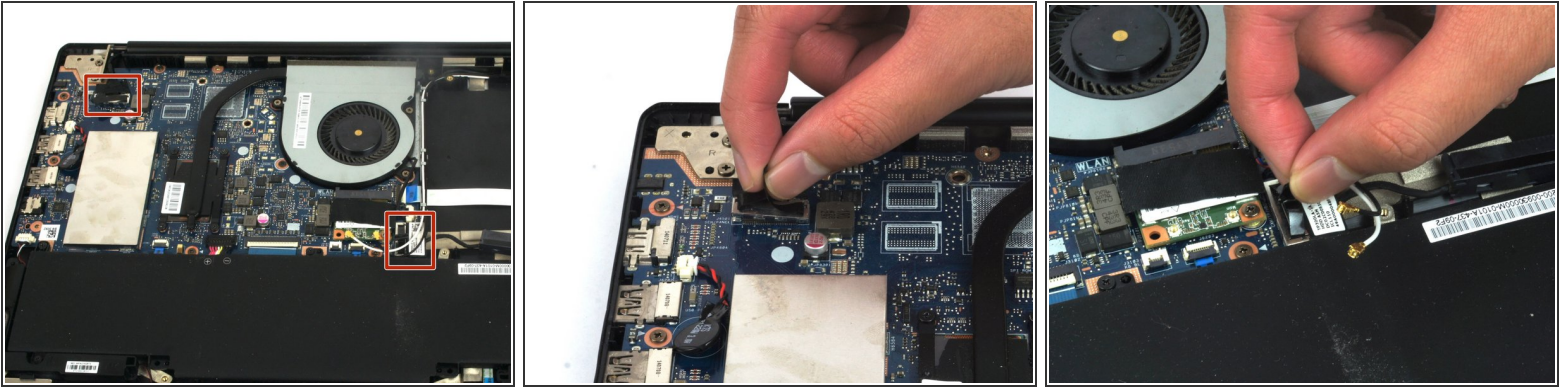

- Remove the two adapters connecting the display to the motherboard by pulling the black plastic straps directly upwards.

## Step 7

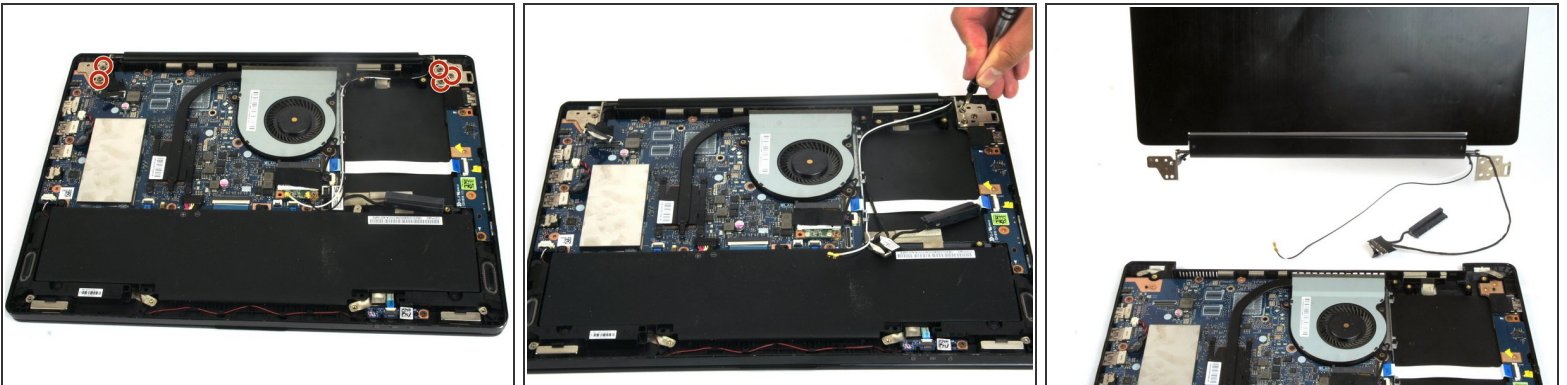

- Use the JIS #0 screwdriver to remove the five 5.0 mm screws connecting the display to the rest of the laptop.

To reassemble your device, follow these instructions in reverse order.