




iPad 2 GSM Front Facing Camera Replacement

Internal guide for removing front facing camera after removing headphone jack assembly.

Written By: Andrew Optimus Goldheart

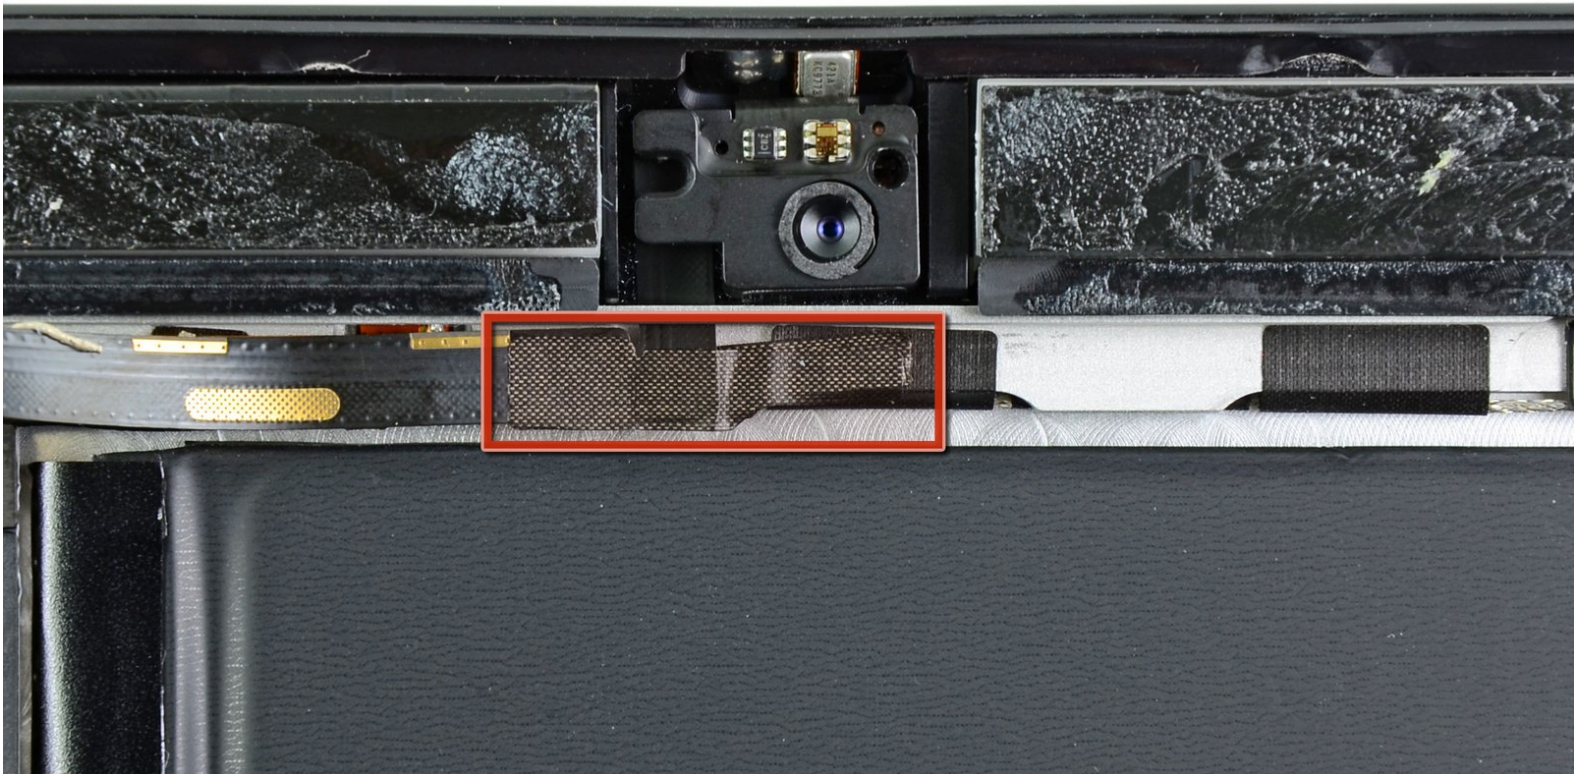

INTRODUCTION


Internal guide for removing front facing camera after removing headphone jack assembly.



TOOLS:

- [iFixit Opening Tools](#) (1)
-

Step 1 — Front Facing Camera

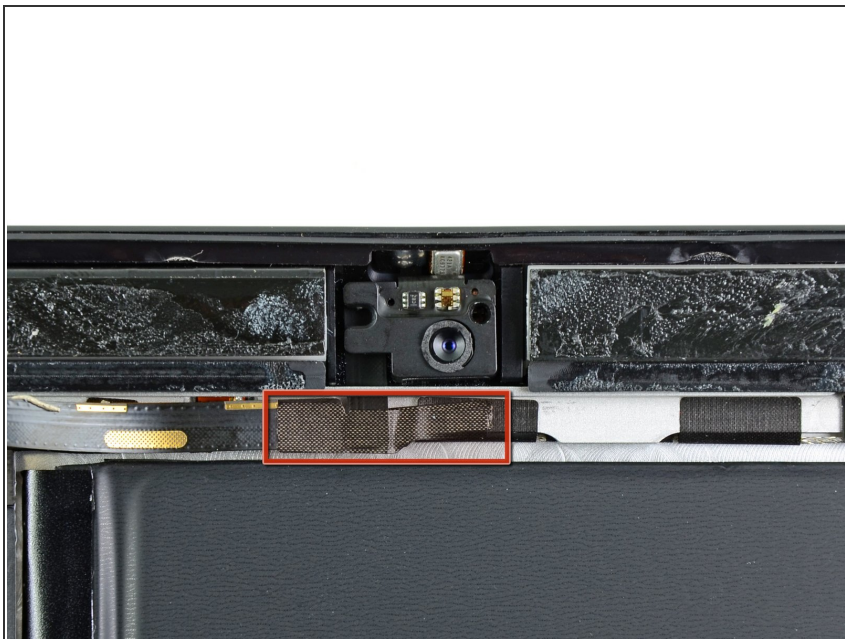

- Remove the piece of tape highlighted in red.
- ⚠ Be careful not to damage the camera, microphone, or headphone jack ribbon cables as you remove the tape.

Step 2





- Peel the front camera off the foam adhesive securing it to the rear panel.

Step 3



- Pull the front facing camera cable out from the channel cut into the rear panel.
- Remove the front facing camera from your iPad.

Step 4

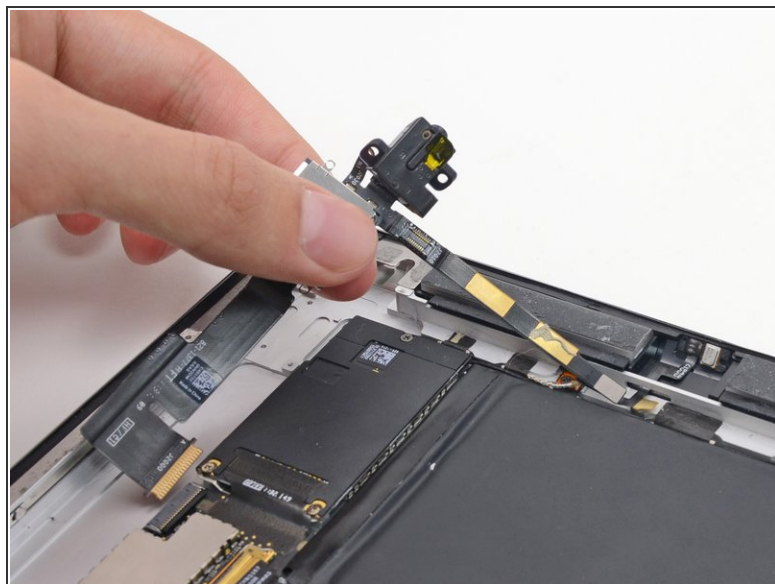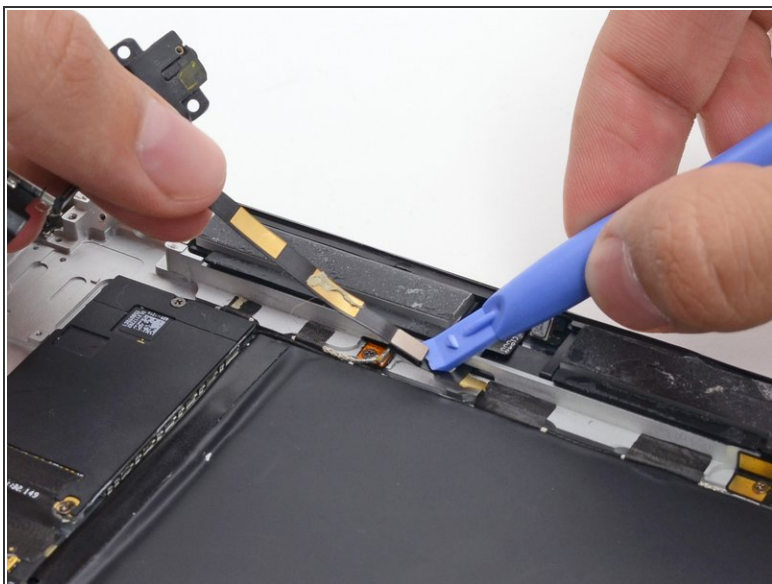

- Use a plastic opening tool to disconnect the microphone cable connector.
- Remove the headphone jack/SIM slot from the device.

To reassemble your device, follow these instructions in reverse order.