



Escort Passport Max2 Lens Replacement

A how to guide for replacing the Passport Max2's Lens.

Written By: Kelsey Ferrenberg



INTRODUCTION


If the Passport Max2's lens gets cracked or damaged, this guide will communicate how to replace it.



TOOLS:

- [Spudger](#) (1)
 - [Phillips #1 Screwdriver](#) (1)
-

Step 1 — Exterior Case

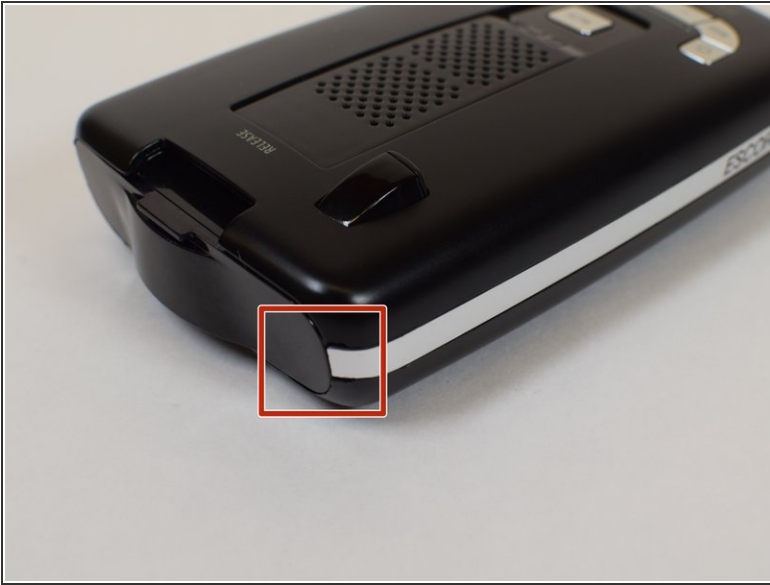

- Insert the flat end of a spudger into one of the two notches and pry off the case.

Step 2



- Slide the spudger around the perimeter of the radar housing until the case separates.

Step 3




- Repeat these steps to remove the other side.

Step 4 — Lens



- Remove the four 9mm Phillips #1 screws from the bottom of the radar.
- Remove the bottom case.

Step 5

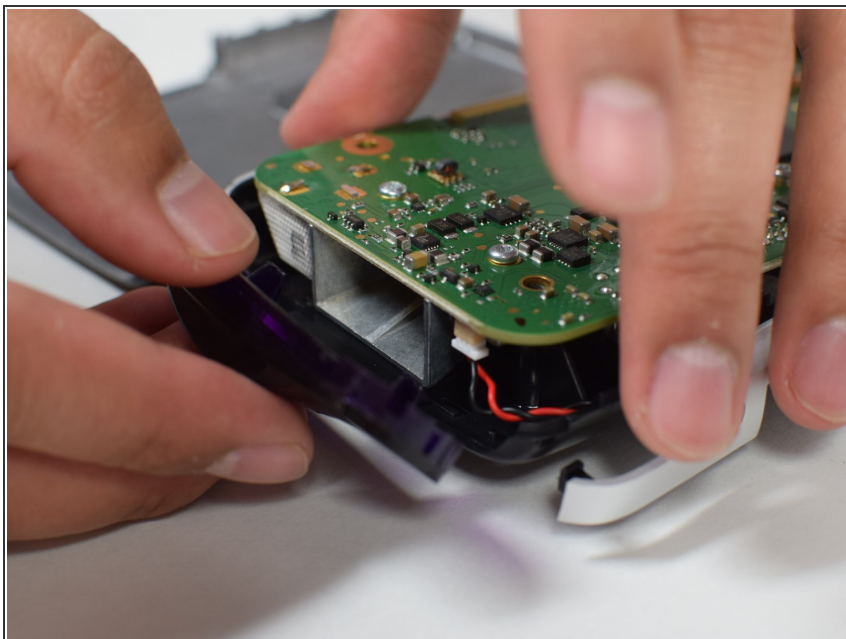

- Gently spread apart the thin silver frame that wraps around the device and remove the dark purple lens.
- ⓘ The silver frame can easily pop off of the device now that the bottom metal case has been removed. *Don't worry if it comes off all the way.* It can easily be put back in it's place.

To reassemble your device, follow these instructions in reverse order.