



Mio ALPHA 2 Motherboard Replacement

This guide teaches the users of Mio ALPHA 2 on how to replace the motherboard.

Written By: Wong Jun Hua



INTRODUCTION

Before you start the replacement process, make sure that you have the proper repair tools, a Philips PH0 head and tweezers. You should be careful not to exert too much pressure/force on the components.

This guide will be able to walk you through the steps to replace your Mio ALPHA 2's motherboard.



TOOLS:

- [Tweezers](#) (1)
- [JIS #00 Screwdriver](#) (1)



PARTS:


- [Mio ALPHA 2 motherboard](#) (1)

Step 1 — Motherboard



- Remove the four 6.7mm JIS #00 screws from the back cover.

Step 2

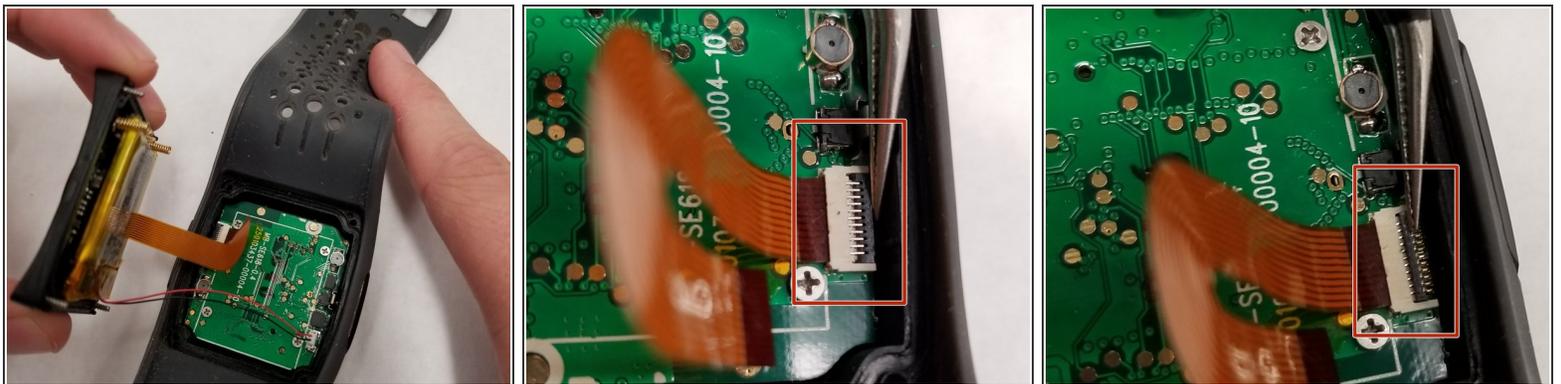

- Pull off the back cover of the watch
- Use a pair of tweezers to flip up the retaining flap on the ribbon cable [ZIF](#) socket.
- Remove the ribbon cable from its socket.

Step 3



- Remove the four 3.8mm JIS #00 screws from the motherboard.
- Remove the motherboard with tweezers

To reassemble your device, follow these instructions in reverse order.