



Fender Frontman 15r Mounting Bracket Replacement

This guide shows how to remove the old mounting and install a new one.

Written By: Greg Sawers





TOOLS:

- [Phillips #0 Screwdriver](#) (1)
- [Phillips #1 Screwdriver](#) (1)
- [iFixit Opening Tools](#) (1)
- [Spudger](#) (1)

Step 1 — Back panel



⚠ Be sure to unplug the device before proceeding.

- Use a Phillips #0 screwdriver to remove the four 21.7mm screws holding the back panel to the frame.

Step 2




- Once the screws are out, use a plastic opening tool or spudger to pry the top of the back panel open. There may be some resistance, but it will eventually pry loose.

Step 3




- Once the top is separated, use your hand to remove the back panel from the unit.

Step 4 — Mounting Bracket

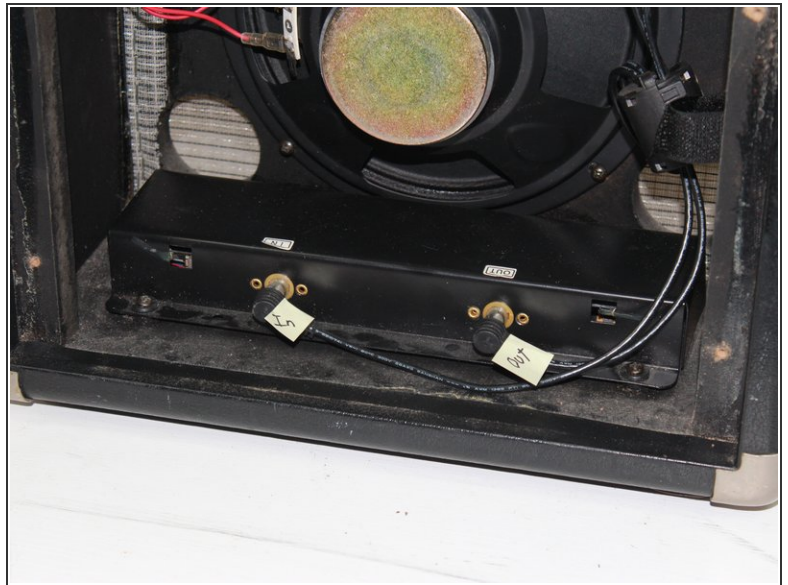

- There will be two black wires connecting the top mounting bracket to the reverb box at the bottom of the unit. Label the wires to prevent crossing upon re-installation, then unplug the wires from the reverb box.

Step 5

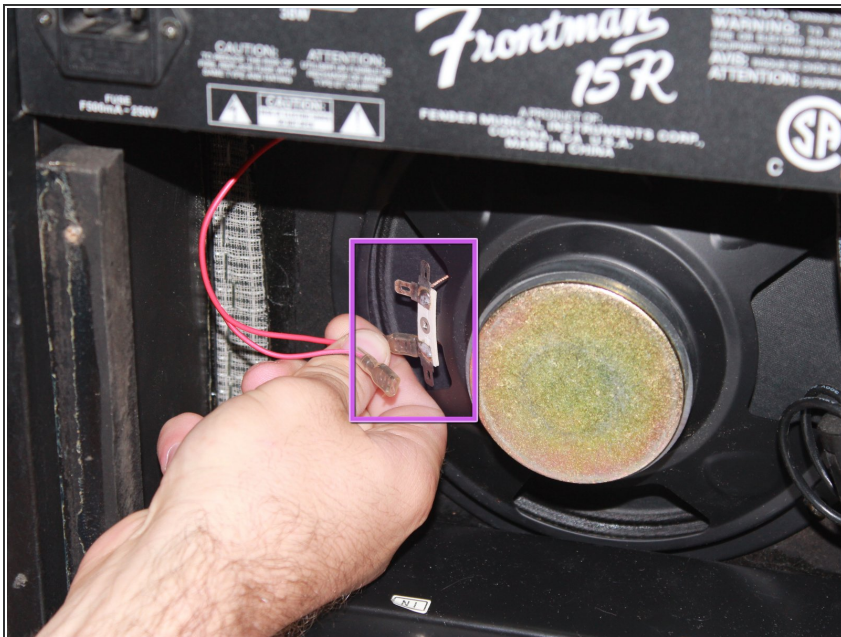

- Label and unplug the two red wires connecting the mounting bracket to the speaker by pulling them off the nodes.

Step 6



- Use a Phillips #1 screwdriver to unscrew the four 36.4 mm screws holding the mounting bracket to the top of the amp.

Step 7



- Pull the mounting bracket free from the frame. It may be wedged in very snug, in which case, use a plastic opening tool/spudger to pry it loose from the front.

Once the old bracket is removed, install the new one by following the instructions in reverse.