



# Motorola W490 Upper Metal Frame Replacement

This guide will help accomplish the removal or installment of the upper metal frame.

Written By: Hannah

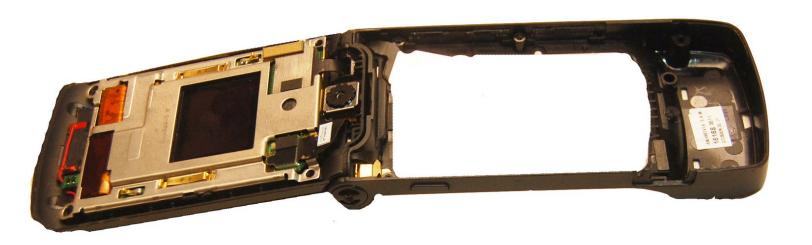


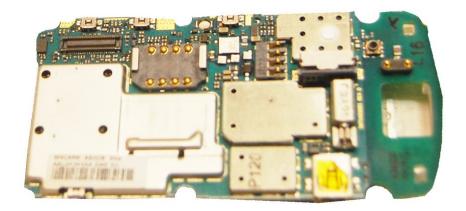



- T5 Torx Screwdriver (1)
- iFixit Opening Tools (1)

#### Step 1 — Upper Metal Frame

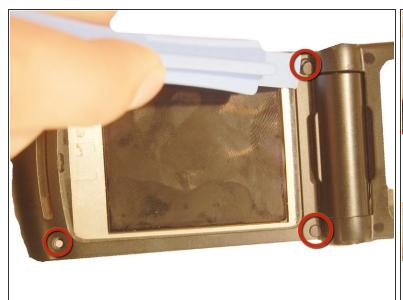



- Use the blue plastic opening tool to pry off all four of the rubber stickers from the upper inside face.
- Use the Torx T5 screwdriver to remove the four 5.4 mm screws from the upper inner face.

### Step 2









Use a flathead screwdriver or plastic opening tools to help pry the top cover away from the phone.


### Step 3

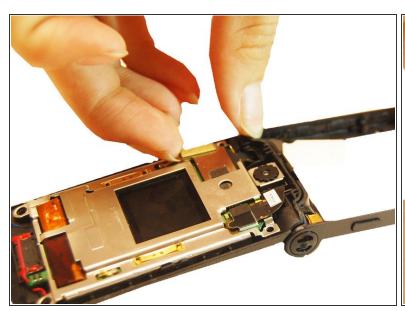


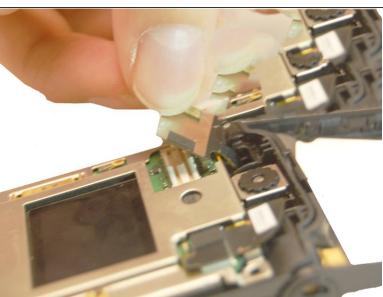

Pull the flex cable connection away from the top of the phone.


### Step 4

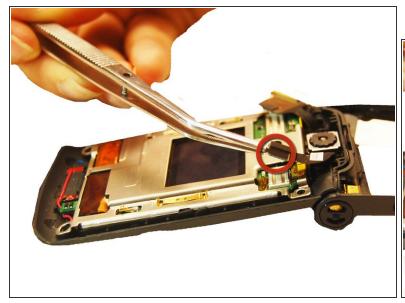

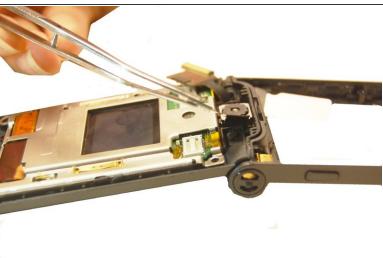


Pull the camera connection away from the top of the phone.

## Step 5







Pull the upper metal frame away from the phone.

To reassemble your device, follow these instructions in reverse order.