




ZTE Tempo Front Screen Assembly Replacement

This guide will show you how to replace the screen of a ZTE Tempo phone.

Written By: omar

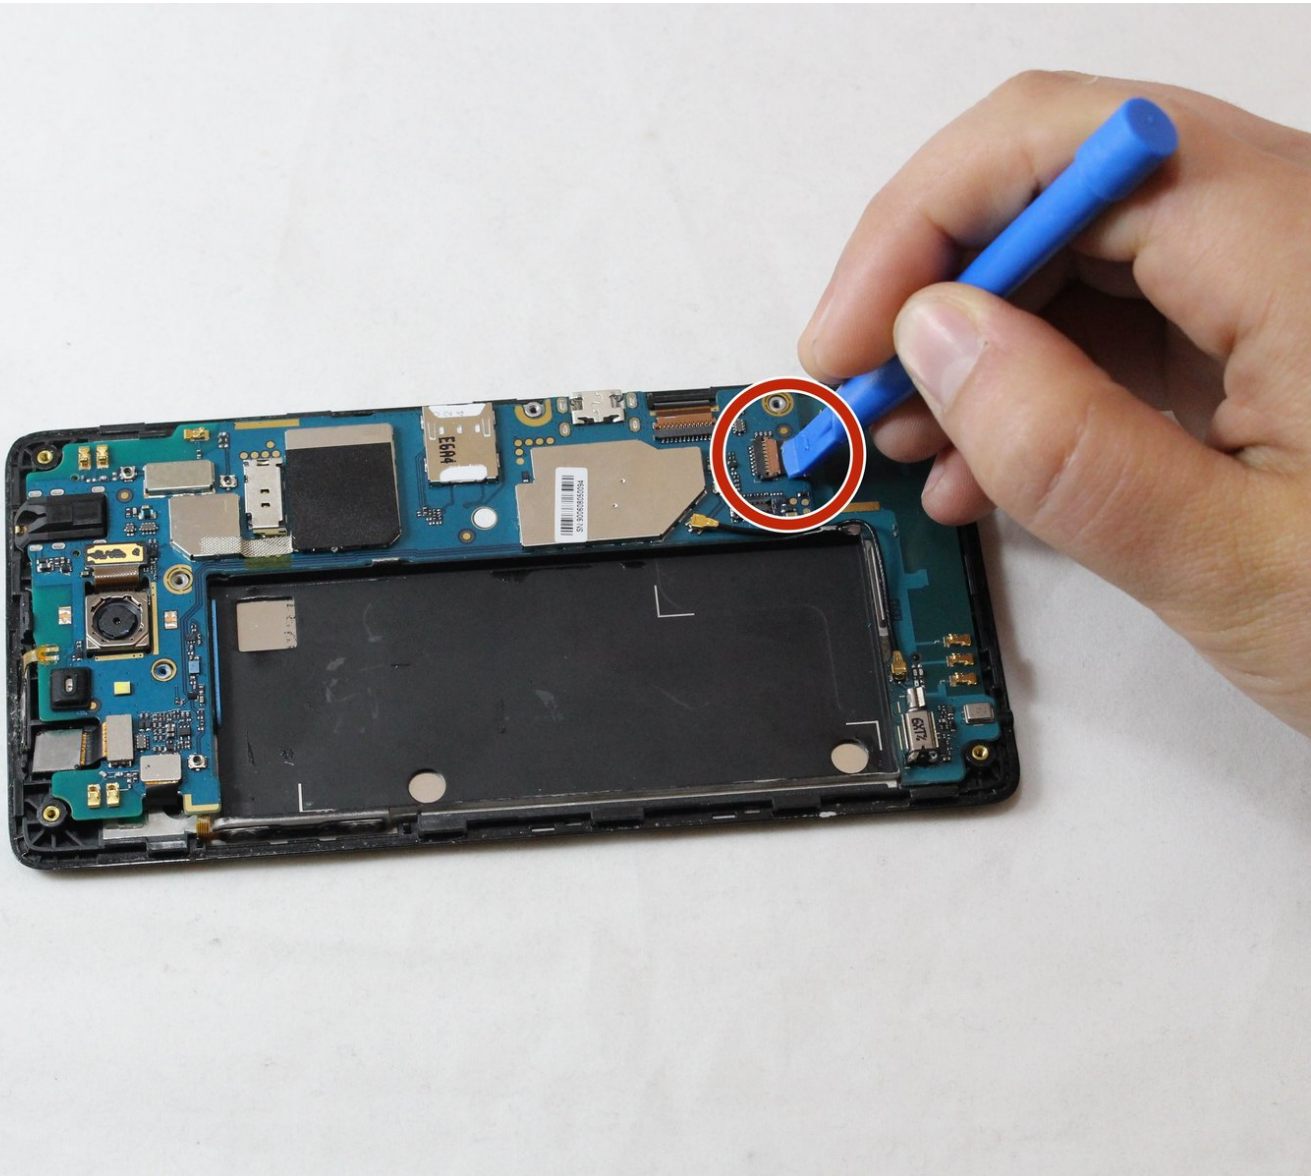

INTRODUCTION


If you've cracked or damaged the screen of your ZTE Tempo phone, it may be time for a replacement. To complete this replacement, you will need a few tools, so make sure to check the Tools List below before starting this replacement. This guide will help you properly and safely replace the screen on your ZTE Tempo phone.



TOOLS:

- [Metal Spudger](#) (1)
 - [iFixit Opening Tools](#) (1)
 - [Tweezers](#) (1)
 - [Phillips #0 Screwdriver](#) (1)
-

Step 1 — Battery

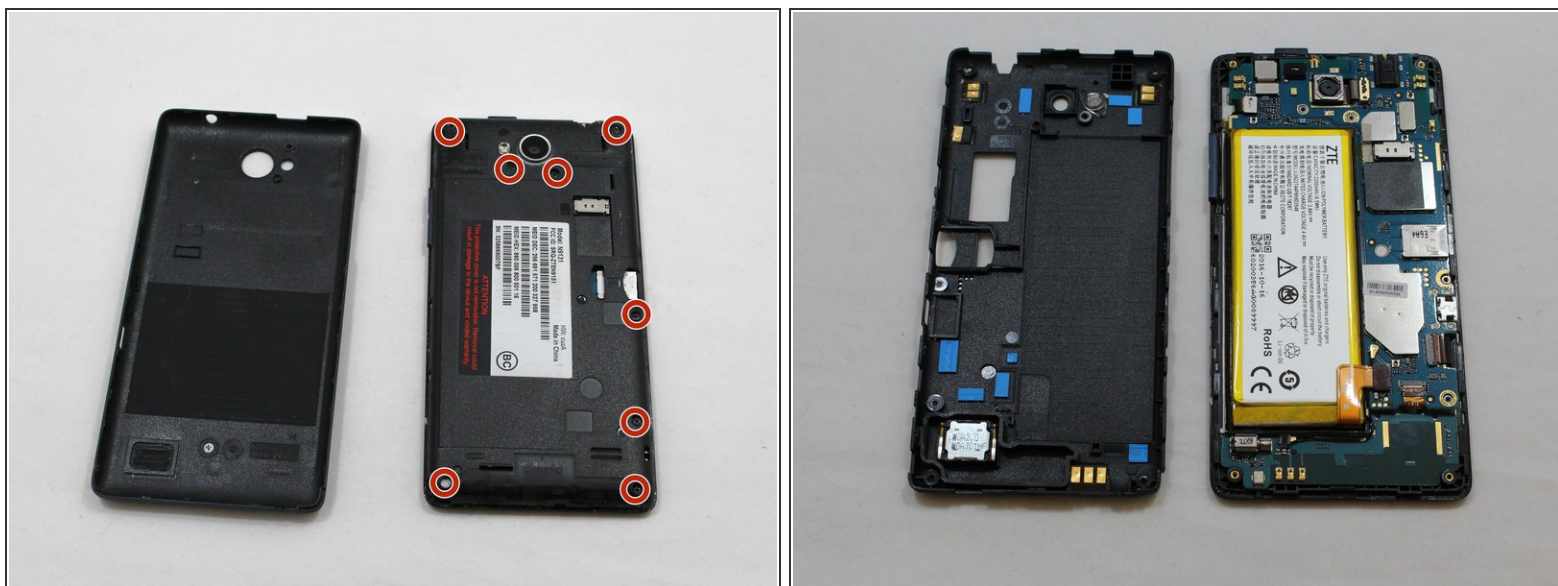


- Use a plastic opening tool to pry open the back case.
- Use a Phillips #0 screwdriver to remove the eight 5mm screws.
- Use a plastic opening tool to remove the midframe.

Step 2



- Use a plastic opening tool to lift the press-fit connector up and disconnect the battery ribbon cable.
- Lift the battery up and remove it from the phone.

Step 3 — Front Screen Assembly

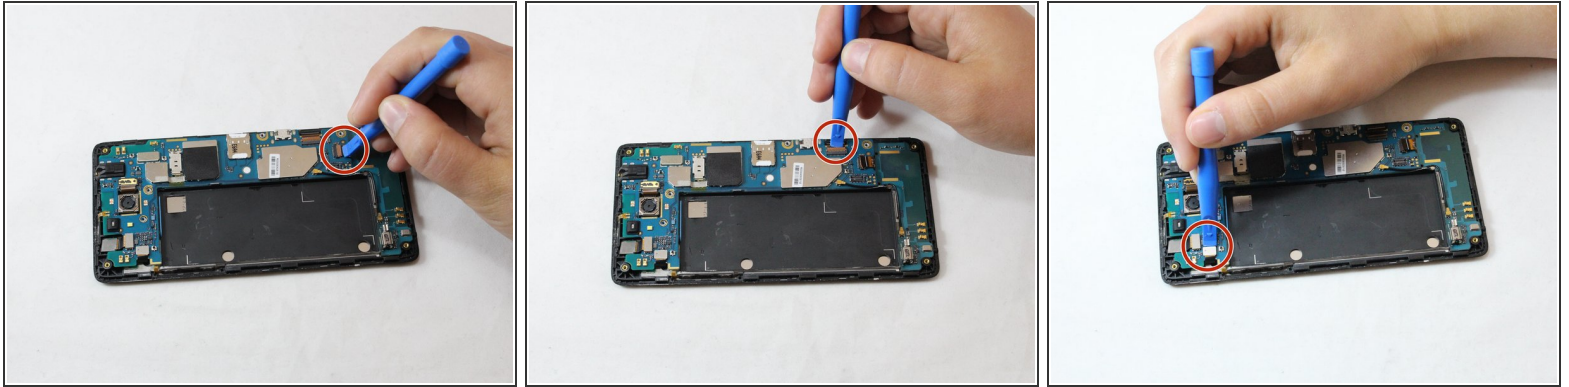


- Use the plastic opening tool to unplug the three connectors.

Step 4




- Use the plastic opening tool to push up on the wire to remove it completely.

Step 5

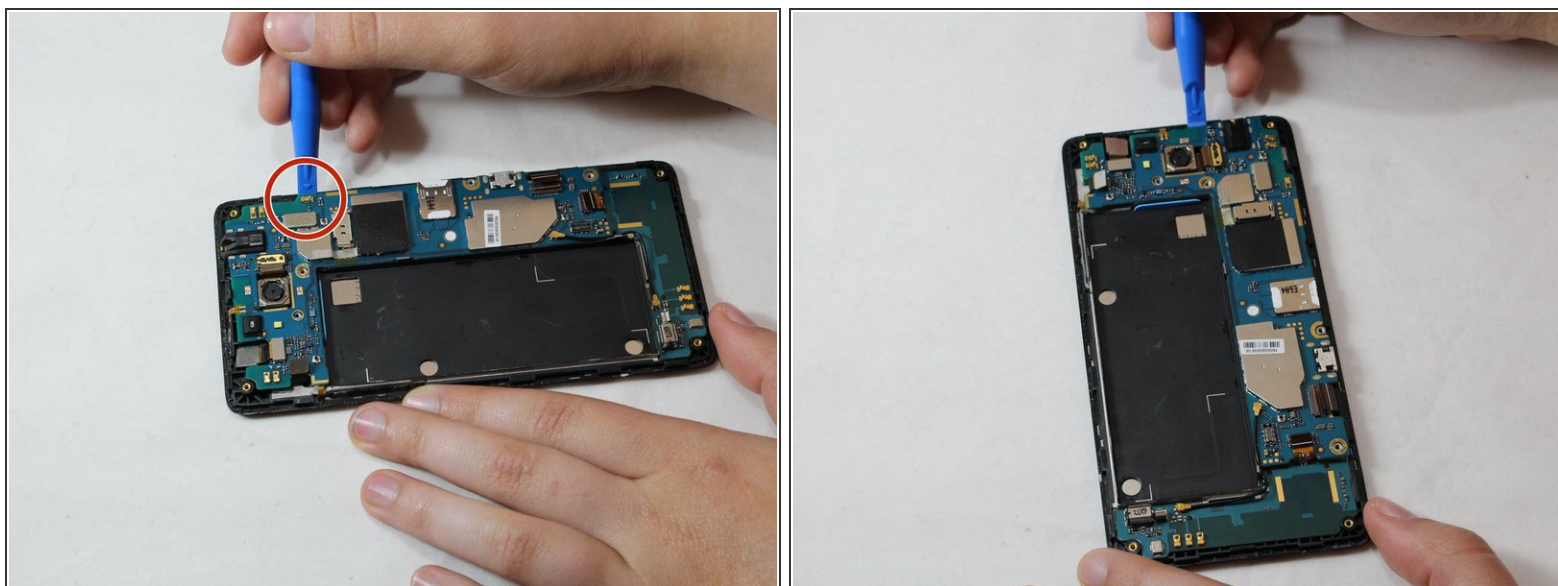

- Insert and slide the plastic opening tool alongside the seam, gently wiggling the opening tool to open and remove the motherboard.

Step 6

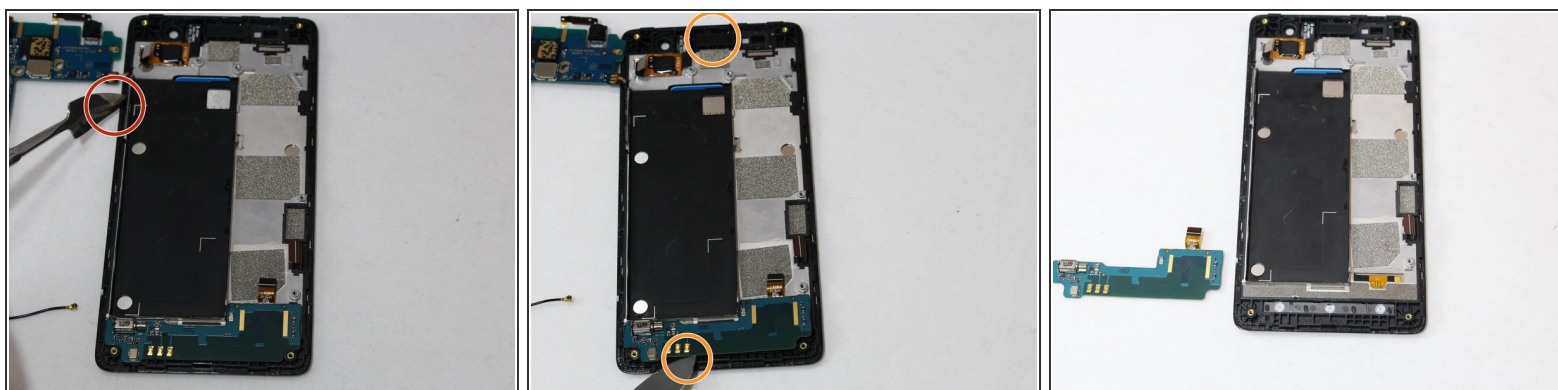

- Use the metal spudger to push up to remove the volume control.
- Use the tweezers to remove the front speaker and bottom controller.

To reassemble your device, follow these instructions in reverse order.