




Razer Blade RZ09-0130 2015 Speaker Replacement

This guide will teach you how to replace the...

Written By: Carson Kellerman

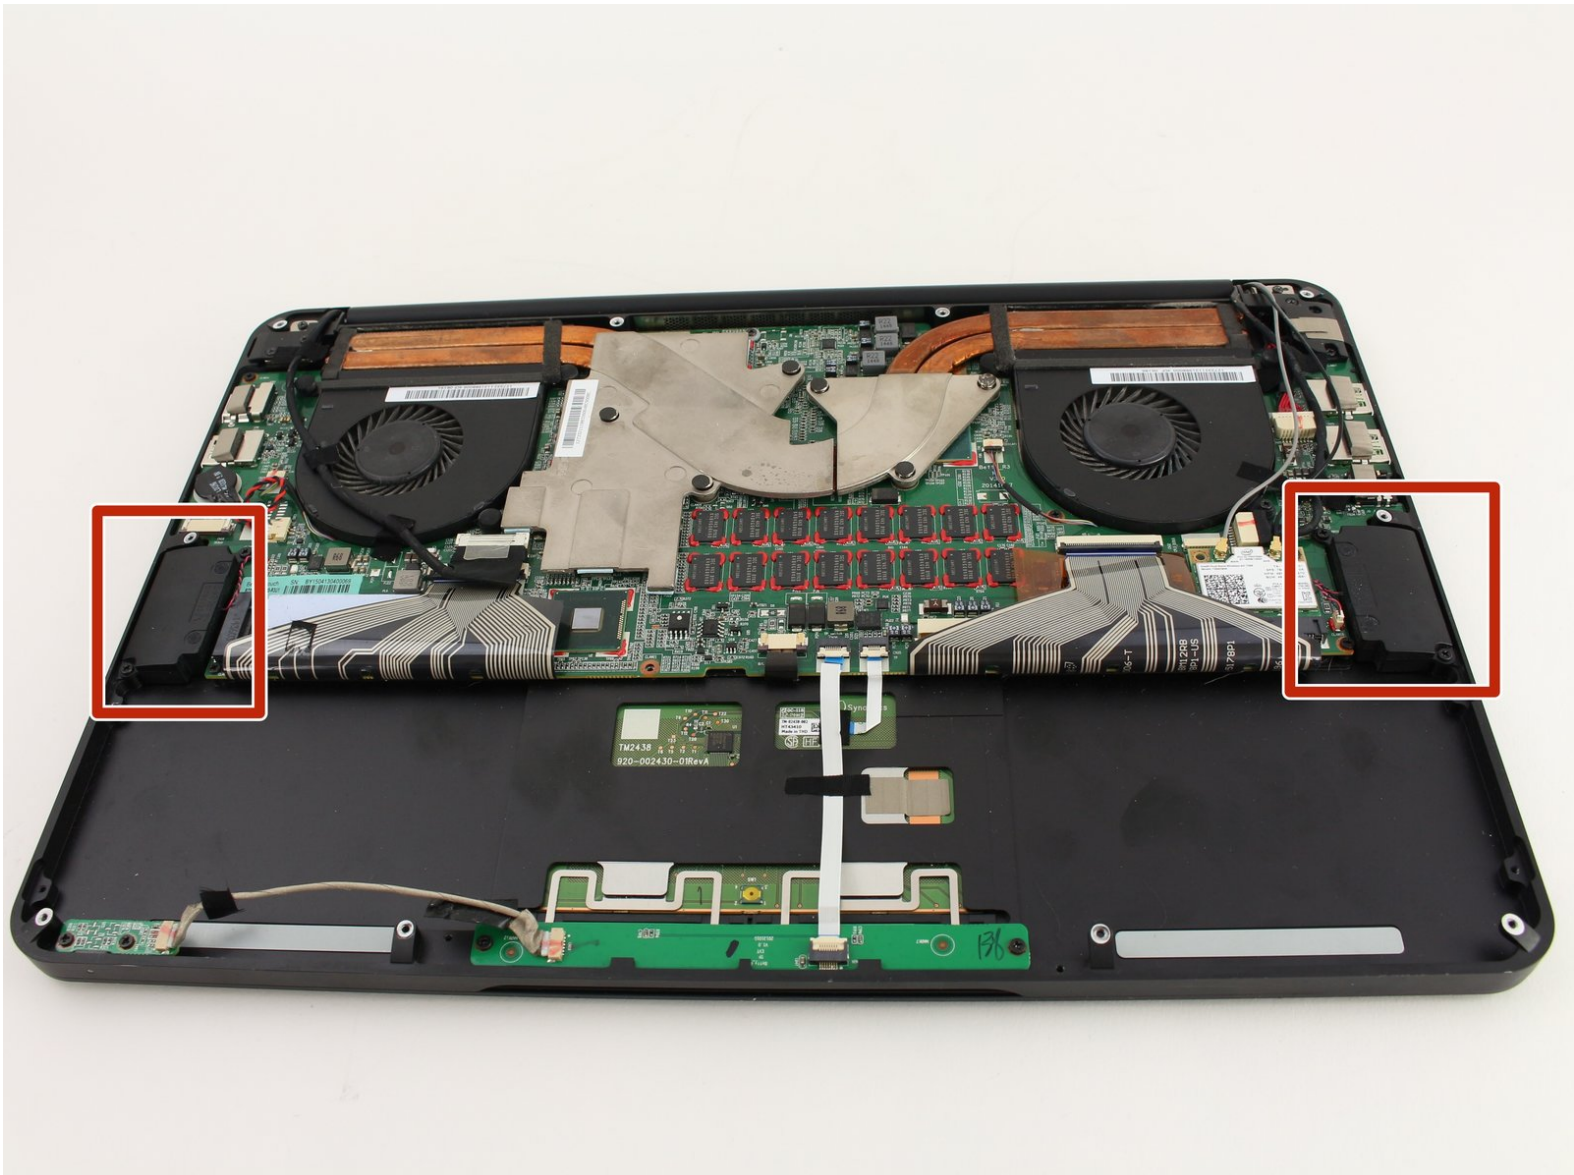

INTRODUCTION

This guide will teach you how to replace the stock speakers that come with the Razer Blade RZ09-0130 2015 laptop. If you are replacing damaged speakers or updating them with newer models, make sure the replacement speakers are compatible before applying this procedure. In addition, run your audio troubleshooter before you open the laptop to ensure that your issue is not software related. The speakers are located along the left and right hand side of the circuitry, each being 1 x 1.75 inches in dimension.

TOOLS:

- [T5 Torx Screwdriver](#) (1)
 - [Phillips #0 Screwdriver](#) (1)
-

Step 1 — Back Panel



⚠ Be sure to power off the device before beginning.


- Use a Torx T5 screwdriver to remove the ten 3 mm screws along the edge of the back panel.

Step 2



- Remove the back panel from the laptop by sliding it away from the hinge.
- ⓘ This device is missing the battery. Make sure to detach the battery connector before proceeding with laptop repairs.

Step 3 — Speaker

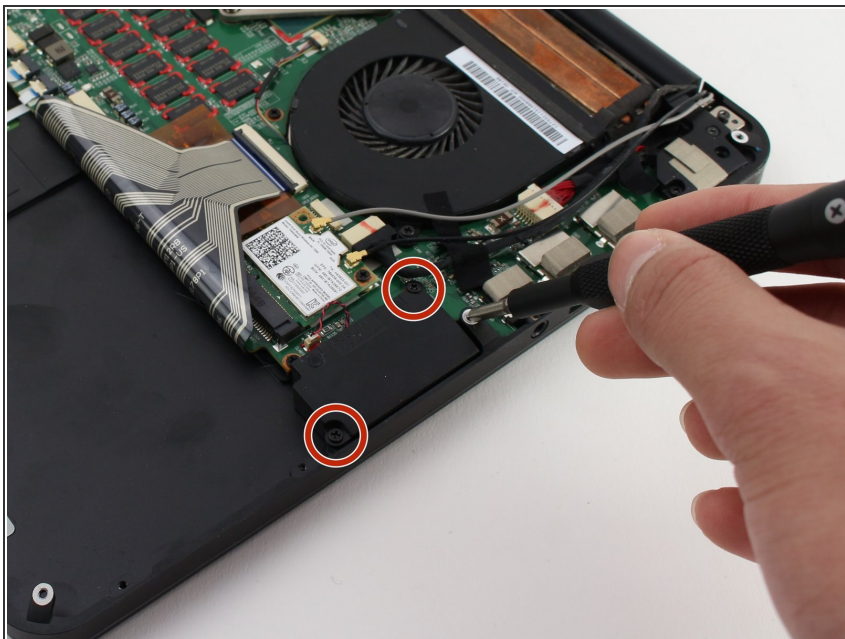

- Using the Phillips #0 screwdriver, remove the two 3mm screws from the right speaker.

Step 4




- Using your fingers, gently pull on the wire connecting the speaker to the motherboard until it disconnects.

Step 5



- Pick up and remove the speaker.

Step 6

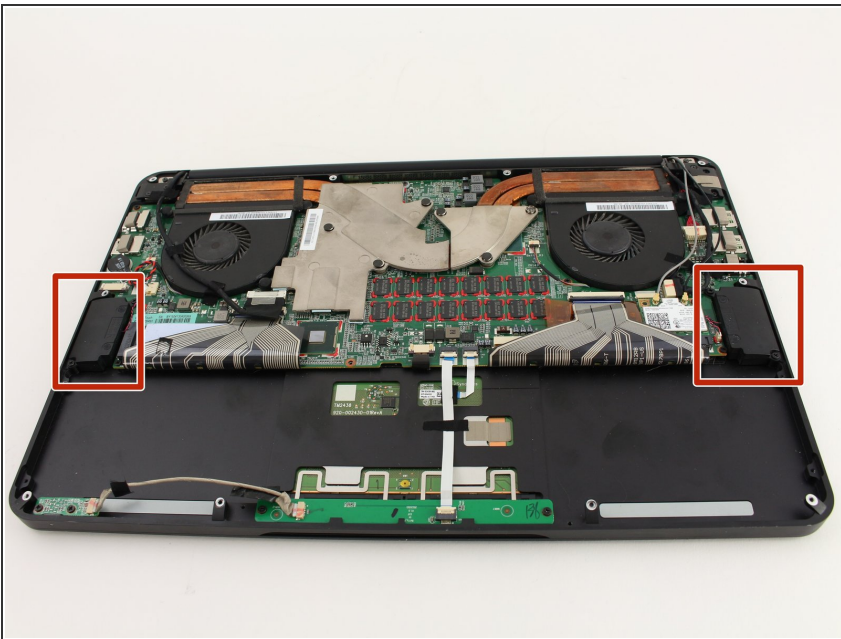

- Repeat the preceding steps to remove the second speaker.

To reassemble your device, follow these instructions in reverse order.