




Nintendo GameCube Optical Drive Assembly Replacement

This guide will teach you how to disassemble...

Written By: mwbisson

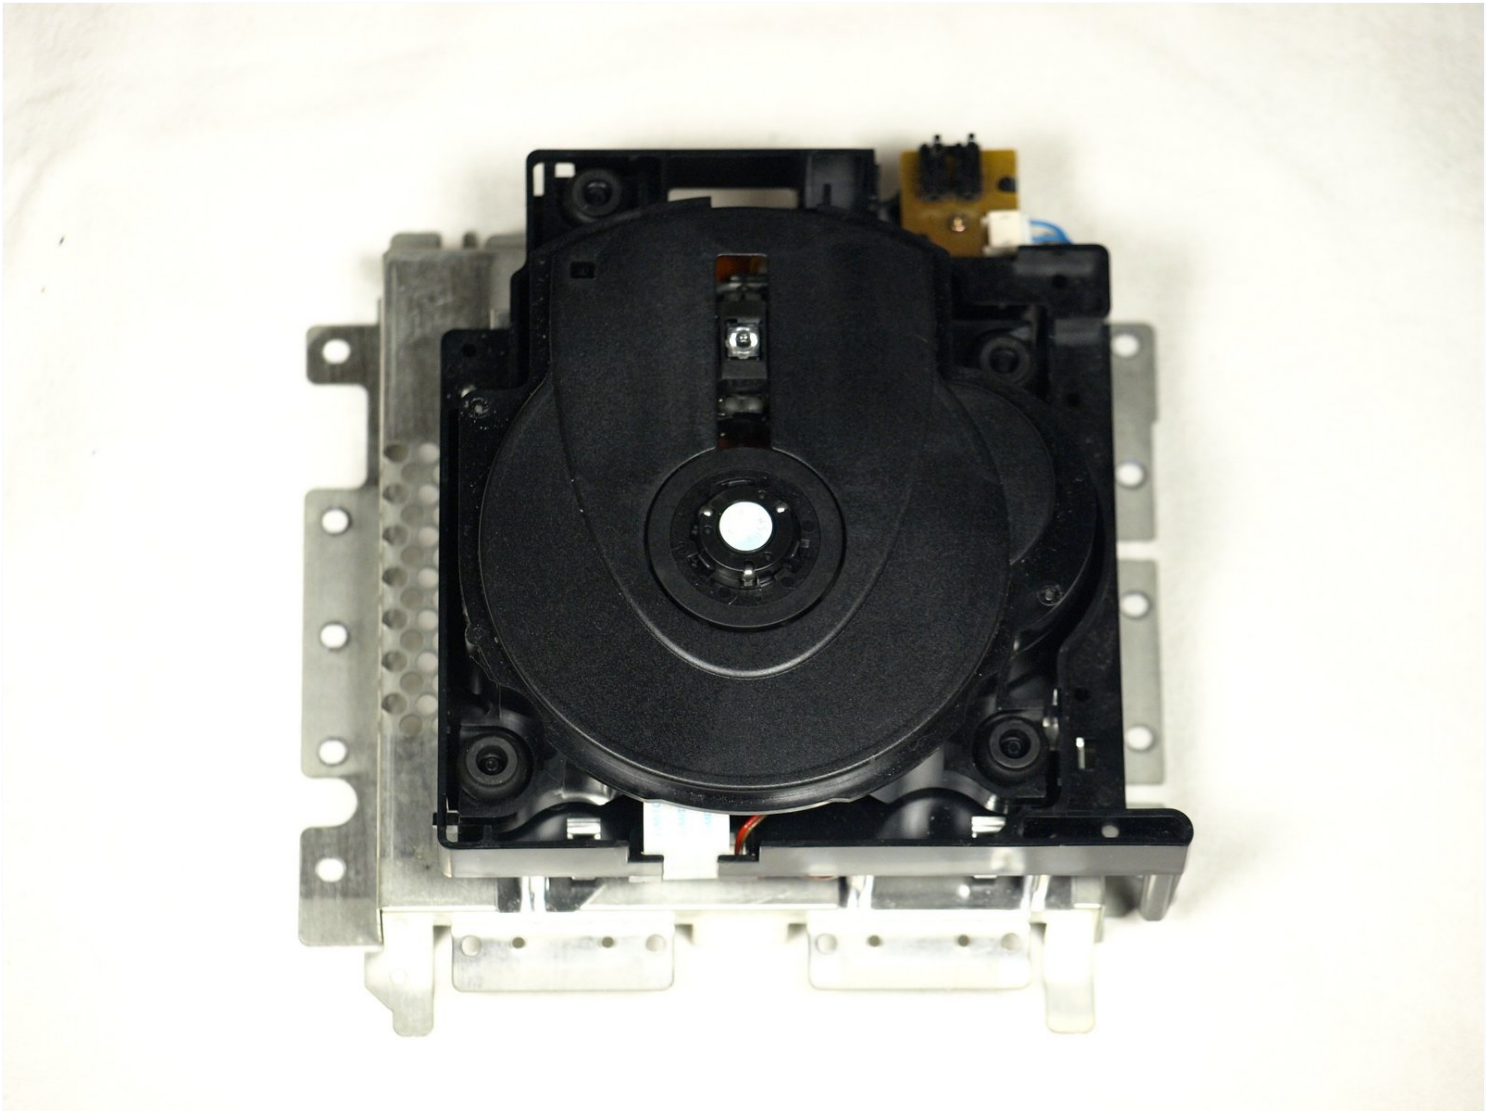

INTRODUCTION

This guide will teach you how to disassemble the GameCube Optical Drive Assembly for the purpose of accessing the Optical Drive and the laser. These parts are responsible for reading the information off of the game discs which allows games to be played on the console.

If the Optical Drive malfunctions (fails to spin the disc for example) or the Optical Laser Lens is damaged, it can prevent the game discs from being read properly. This can warrant a replacement of the device part. As the GameCube is an older console, E-bay would be a good place to start when searching for a replacement part.

Before attempting the disassembly, you will need a 4.5 mm Gamebit screwdriver. This is special tool that is used to open certain Nintendo consoles and can be ordered online from Amazon.

TOOLS:

[Nintendo GameCube Bit Tool](#) (1)

[Phillips #1 Screwdriver](#) (1)


[Phillips #2 Screwdriver](#) (1)

Step 1 — Top Case




- Turn over the Gamecube so that the bottom side is facing up.
- Use the 4.5 mm Gamebit screwdriver to remove all four screws.

Step 2

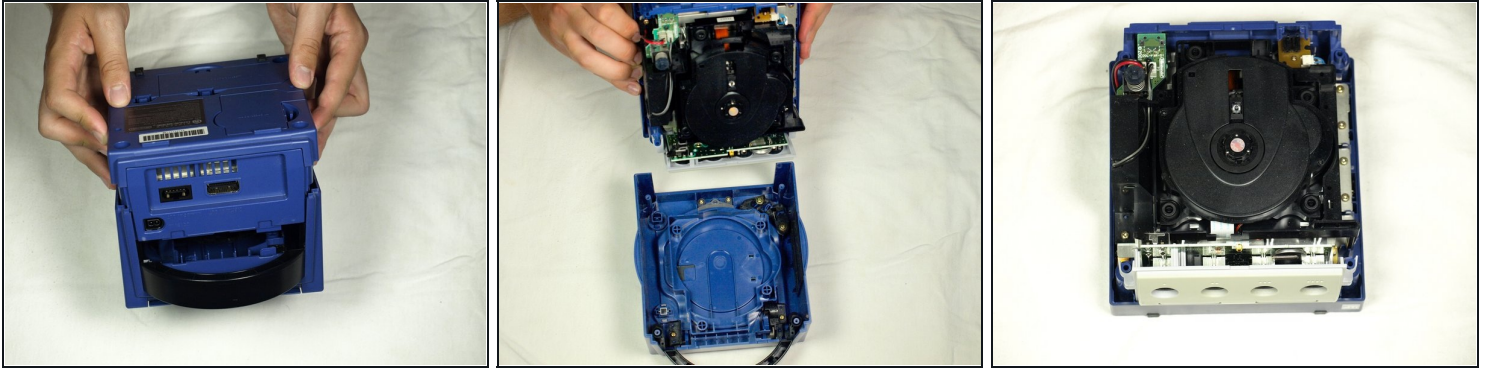


- With the bottom side of the GameCube facing upward and the screws removed, carefully pull the outer shell of the unit away from the top half.
- Move the GameCube so that the inside is facing upwards.

Step 3 — Removing the back panel

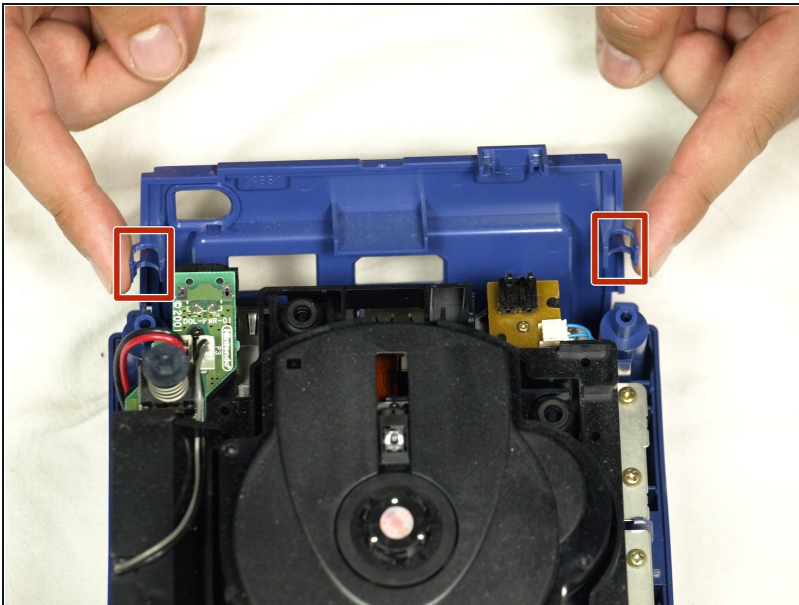

- Gently press down on the clips located on either side of the back panel.
- Carefully remove the back panel from the GameCube.

Step 4


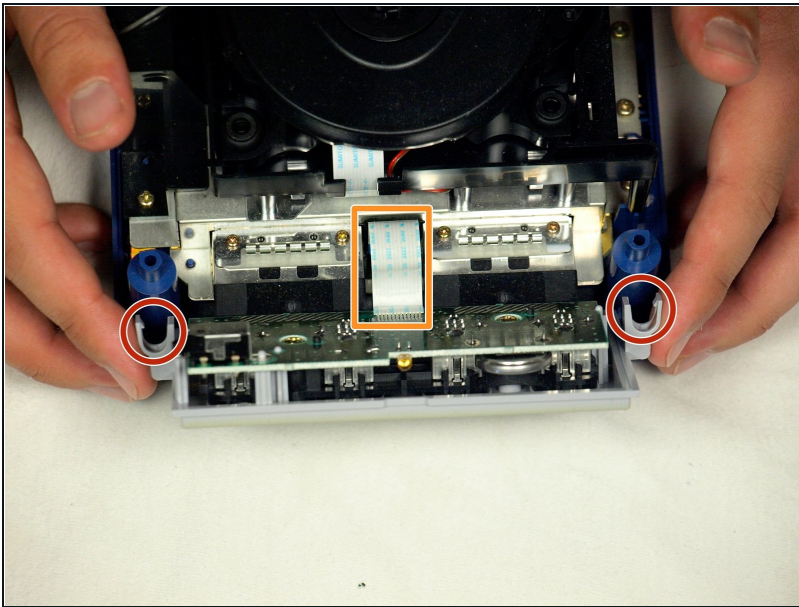


- Unclip the controller ports at the front of the unit.

⚠ A ribbon cable (outlined in orange) is still attached to the unit. **Do not disconnect this cable.**



- ★ Controller ports are where the controllers plug into the game console, and are a half circular shape.

Step 5 — Separate the casing

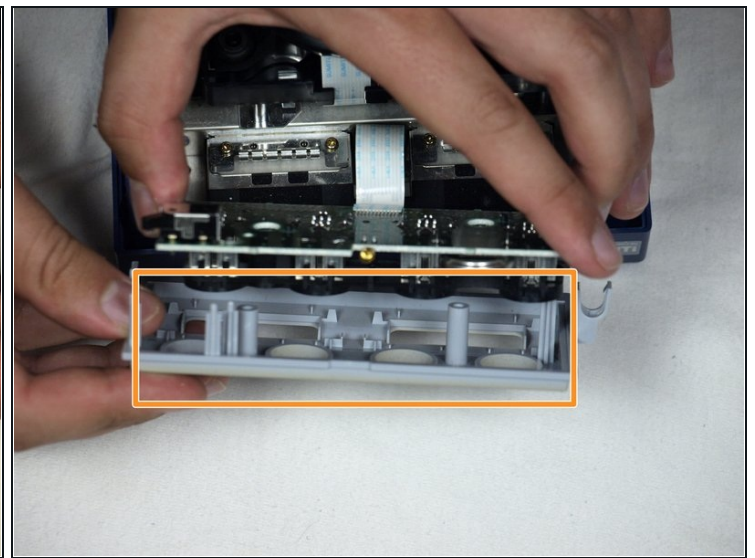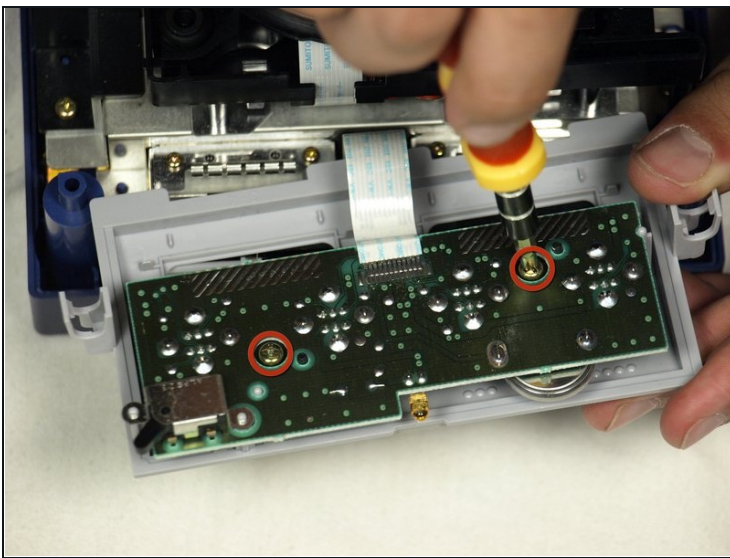



- Use a Phillips #2 screwdriver to remove the two screws on the back of the control port.
- Carefully separate the gray outer casing of the control port and the circuit board.

Step 6 — Remove Nintendo GameCube Optical Drive Assembly

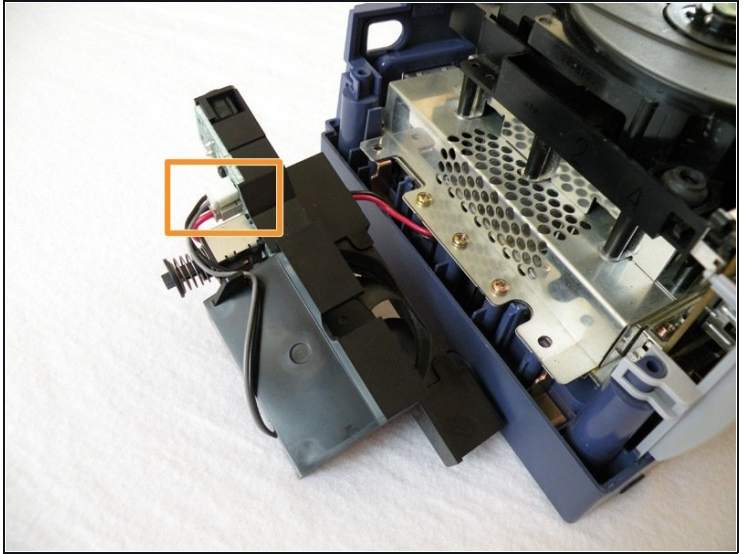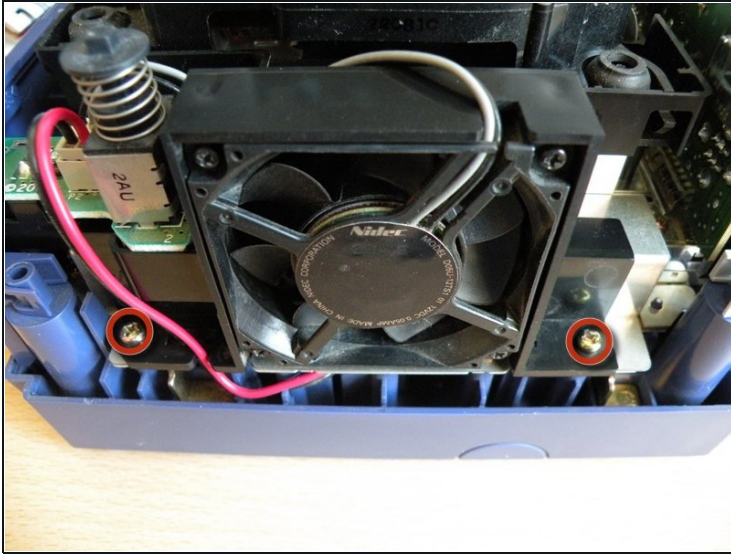



- The left side of the unit contains the cooling fan and its housing.
- Carefully remove the two screws attaching the cooling fan housing to the unit.
⚠ Do not detach the red and black cooling fan wire from the main unit. Boxed in orange.

Step 7

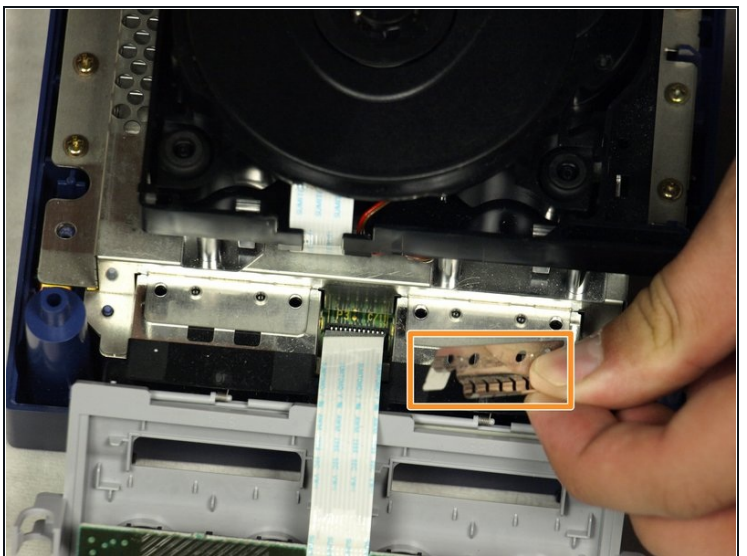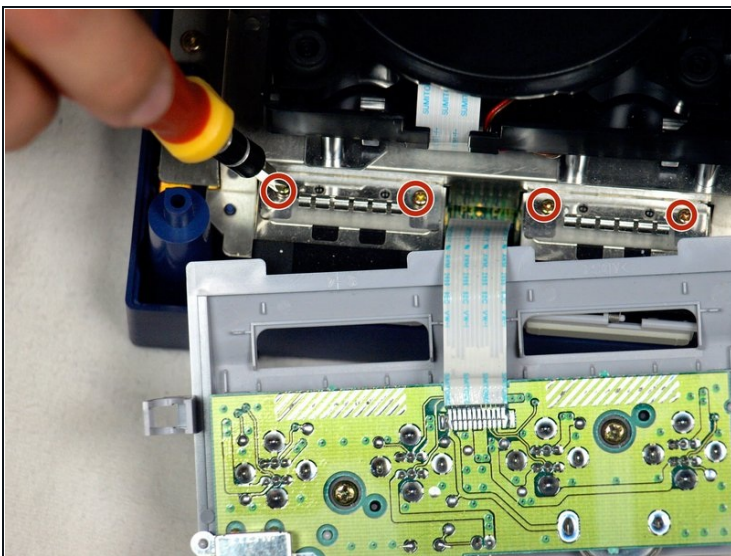




- Remove the four Phillips #1 screws retaining the ground springs.
- Carefully remove the ground springs from the main unit.

Step 8

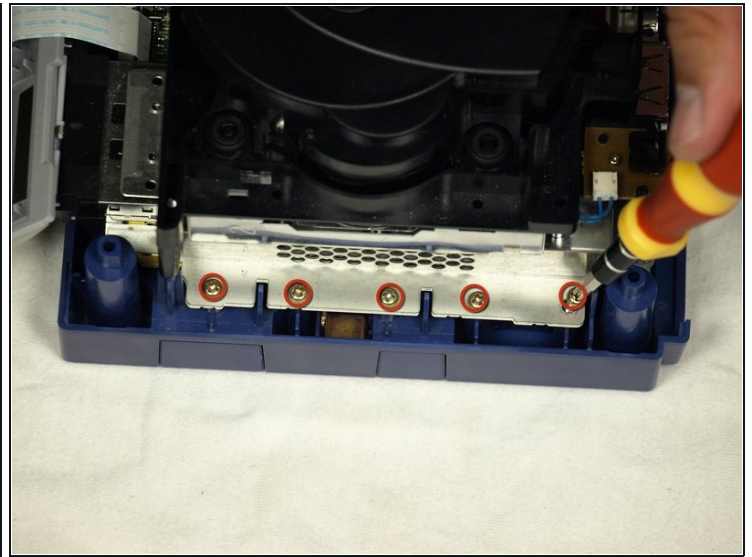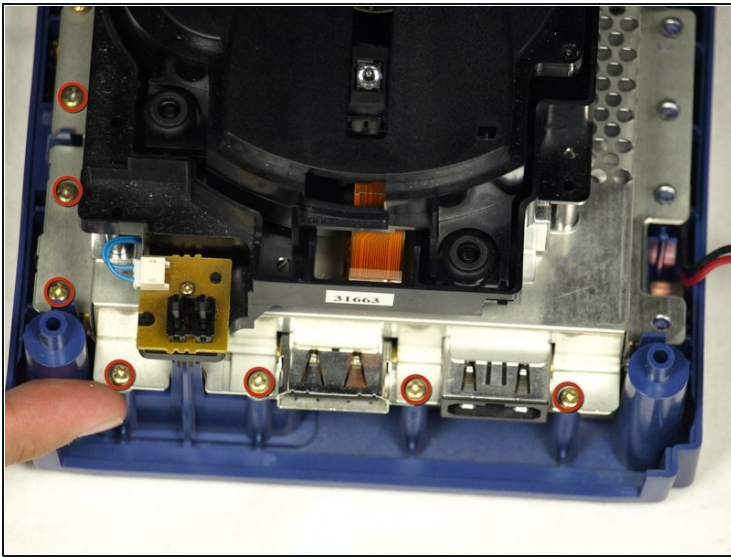




- The optical drive is secured to a metal plate.
- Using a Phillips #2 screwdriver, unscrew the twelve screws that are around the outer edge of the optical drive.

Step 9 — Remove the assembly

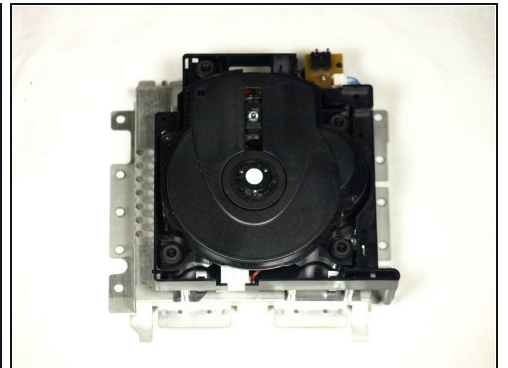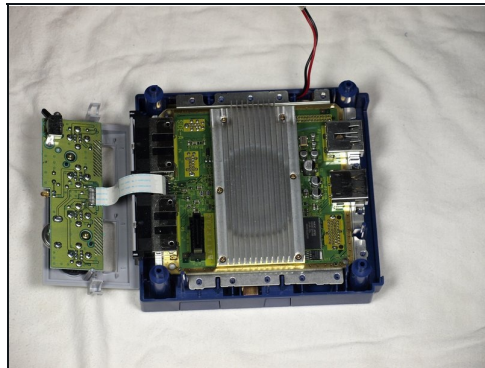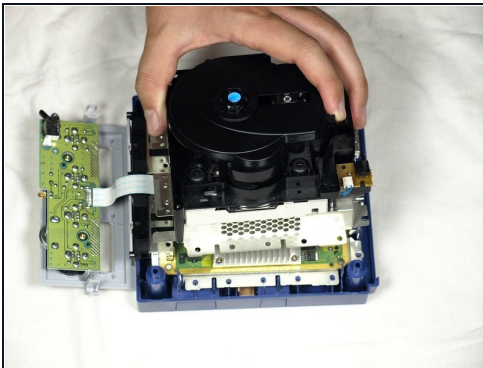

- Carefully separate the optical drive assembly from the rest of the GameCube unit.
- The optical drive assembly is secured to the motherboard underneath by a slot; some force may be required to carefully free the assembly.
- The metal plate and the actual optical drive will remain attached.




Step 10 — Optical Drive Assembly

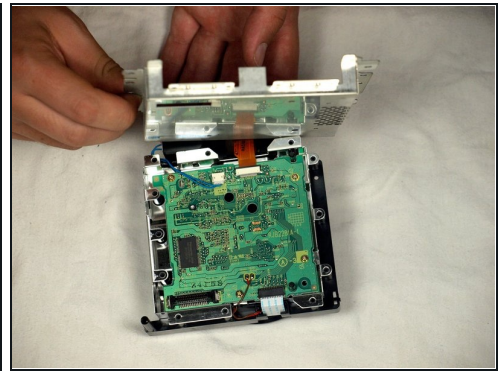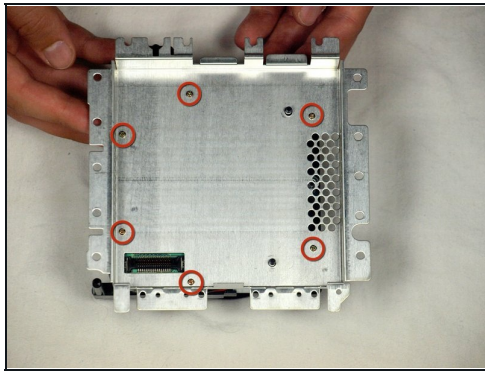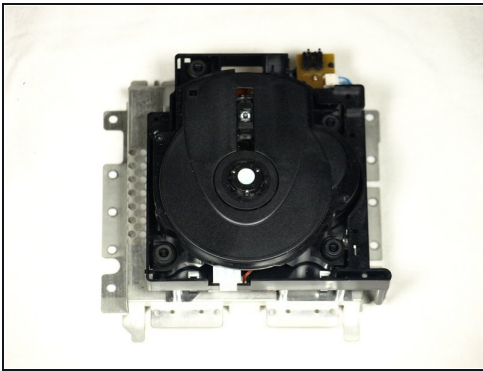

- At this point, your optical drive assembly should be separated from your GameCube.
- Flip the optical drive assembly upside down.
- Remove the six screws with a Phillips #1 screwdriver.
- Gently lift and remove the metal plate.




⚠ Be careful not to disturb the brown ribbon cable.

Step 11

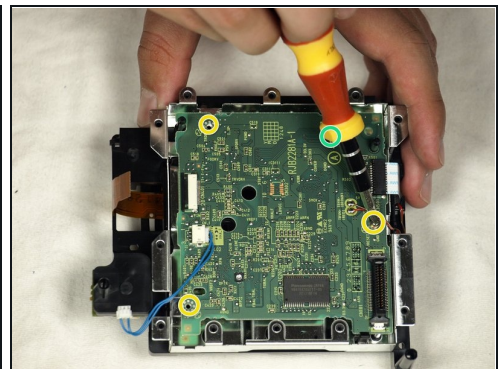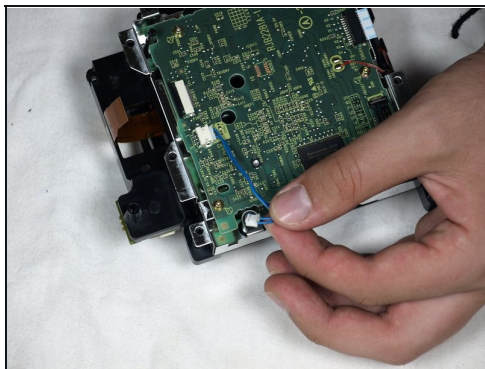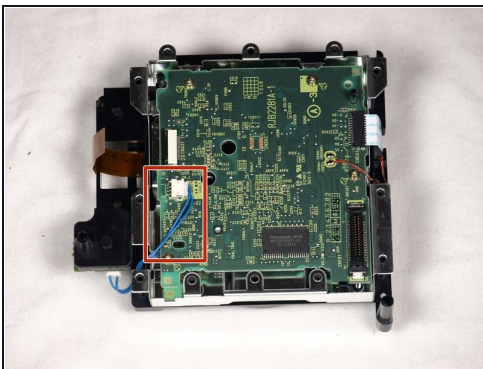

- Remove the blue wire by gently pulling.
⚠ Don't pull on either the wire itself or the connector attached to the board.
- Disconnect the brown cable. This is done by gently pulling the black tab away from the white plastic. This will loosen the tension on the brown cable, allowing it to slide away from the tab gently.
- Remove the four Phillips #1 screws connecting the circuit board to the optical drive assembly.
 - The fourth screw is located behind the screwdriver in the third picture.

Step 12

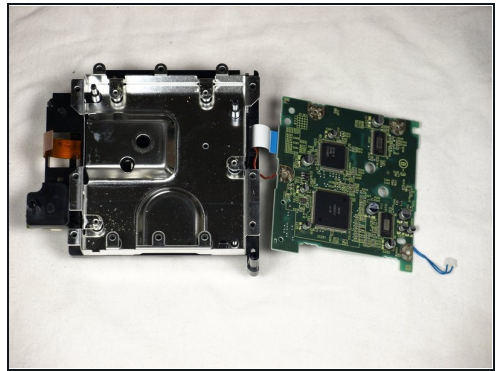
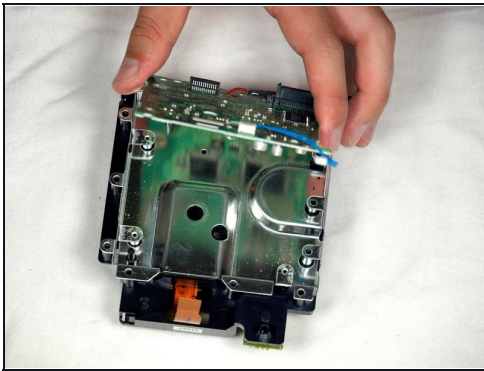
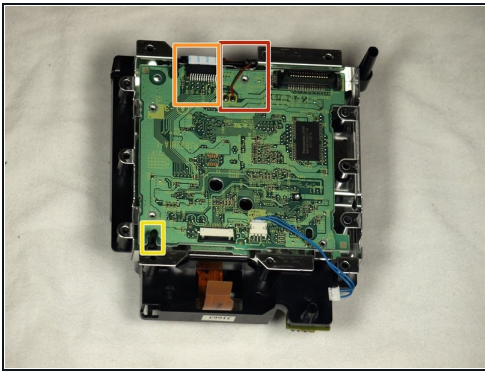


- Release the small clip holding the board down.
- Gently remove the circuit board (the large green square) as shown in the three pictures.

⚠ **DO NOT SEPARATE** the red wire or the white ribbon cable connecting the circuit board to the metal plate.



- Red Wire
- White ribbon Cable

Step 13

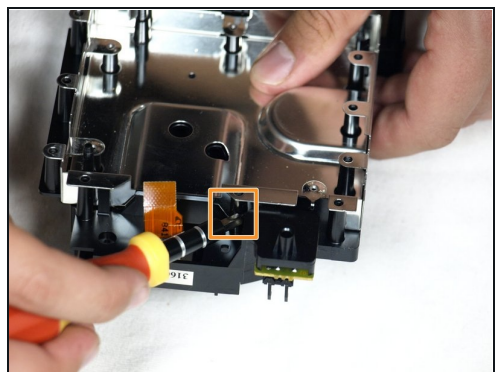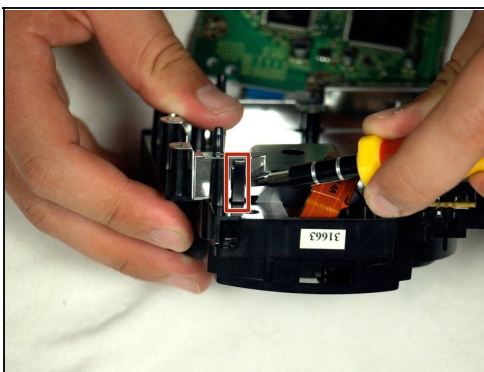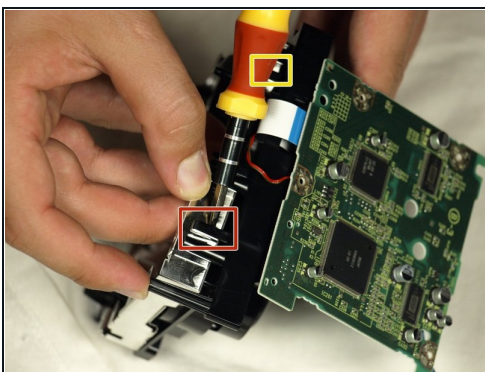

- Use a flathead screwdriver to carefully release the four plastic clips holding the drive assembly together.
- Carefully use a screwdriver as leverage to unscrew and release the last clip.

Step 14


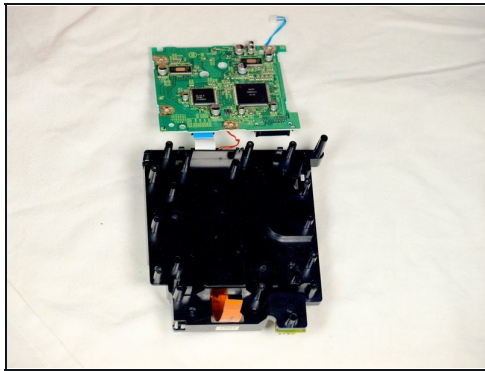
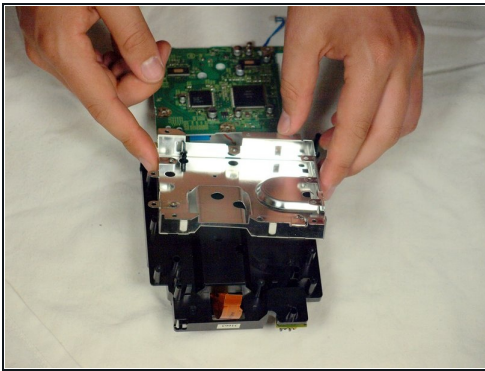


- Gently lift the metal plate off the drive assembly.

⚠ Be careful not to sever the red wire or the white ribbon cable still attached to the two halves of the drive assembly.

- Then, flip the two halves of the drive assembly upside down.



Step 15

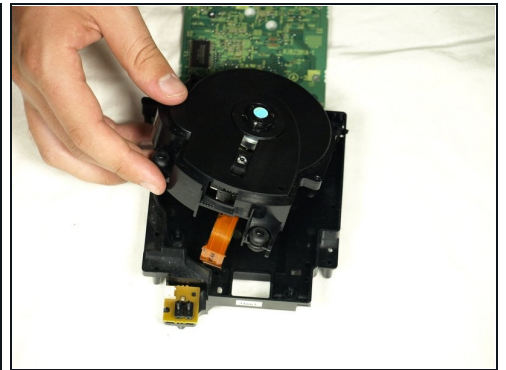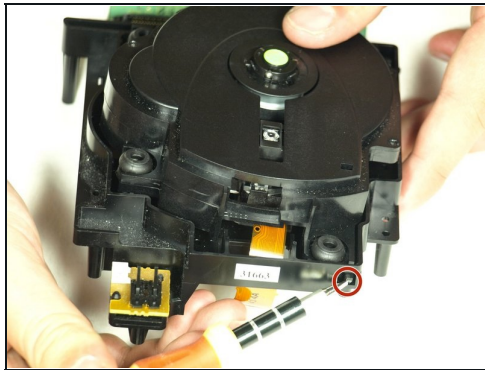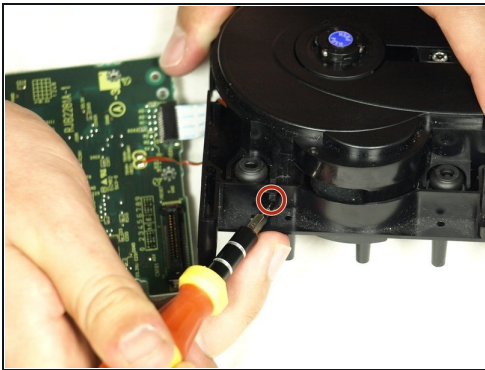

- Use a flathead screwdriver to release the two clips located on the back half of the drive assembly.
- The final clip doesn't need to be released; the top half of the drive assembly will slide away from the lower half.
- Finish removing the top half of the drive assembly from the base.

⚠ Be careful not to detach the red wire or the white ribbon cable still attached.

Step 16

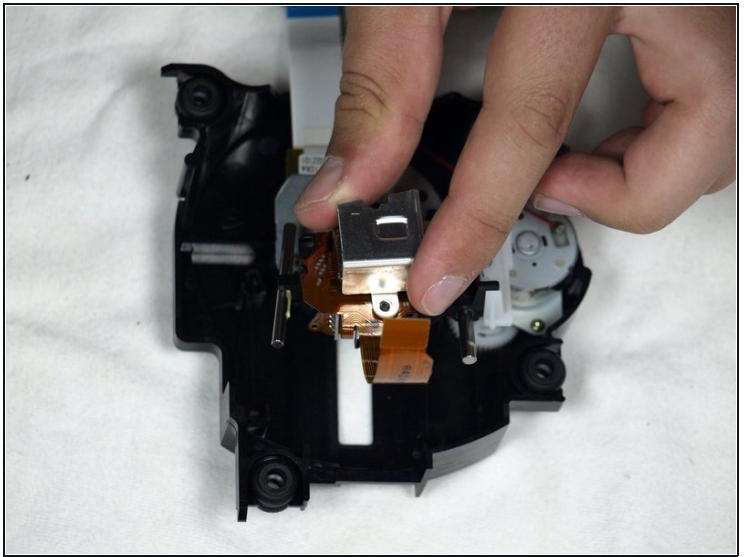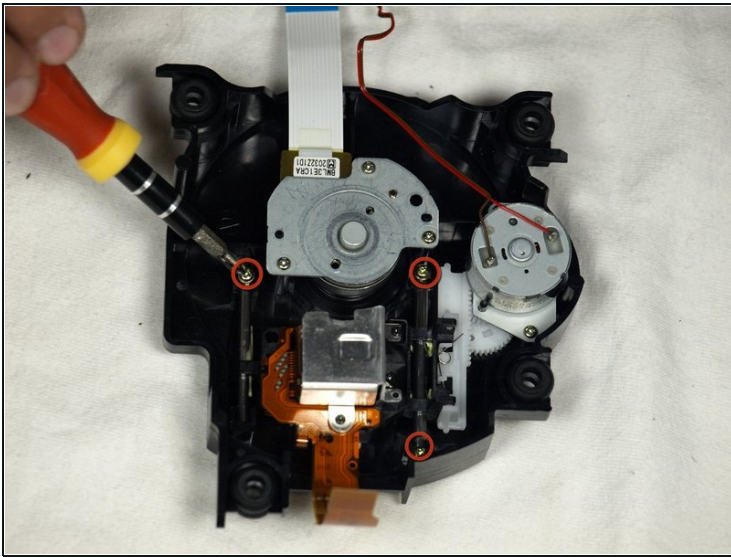

- Once the top half of the drive assembly is detached, turn it upside down.
- Using a Phillips #1 screwdriver, carefully remove the three final screws near the lens assembly bars.
- Extract the final three screws and remove the lens assembly.

To reassemble your device, follow these instructions in reverse order.