




Samsung Galaxy Note Motherboard Assembly Replacement

Prerequisite for removing the motherboard.

Written By: Sam Goldheart

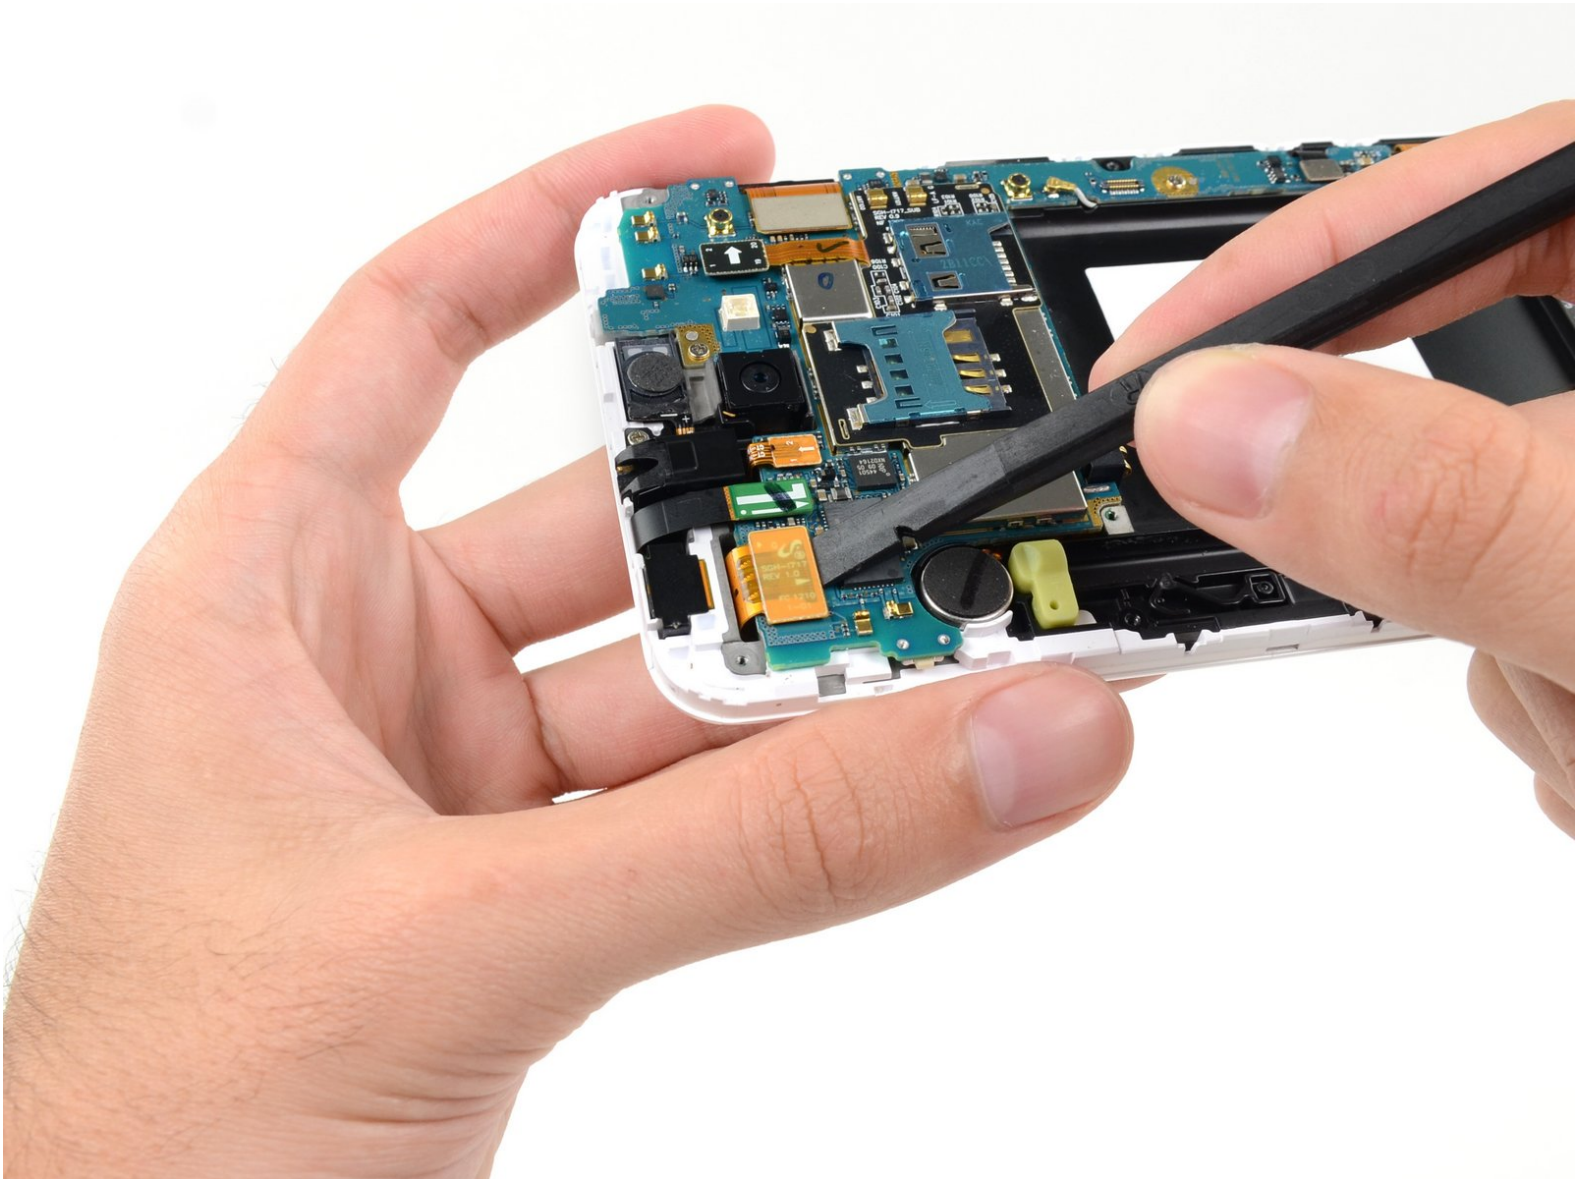

INTRODUCTION



Prerequisite for removing the motherboard.



TOOLS:

- [Spudger](#) (1)
 - [Phillips #00 Screwdriver](#) (1)
-

Step 1 — Motherboard Assembly

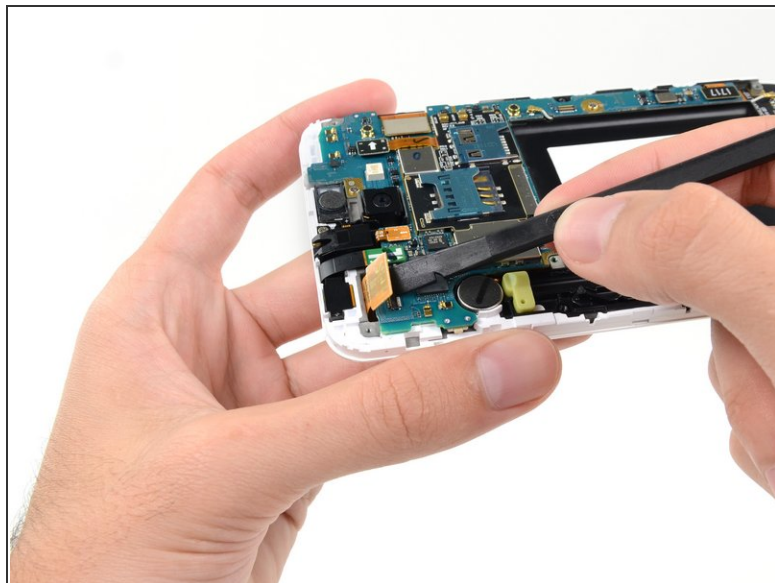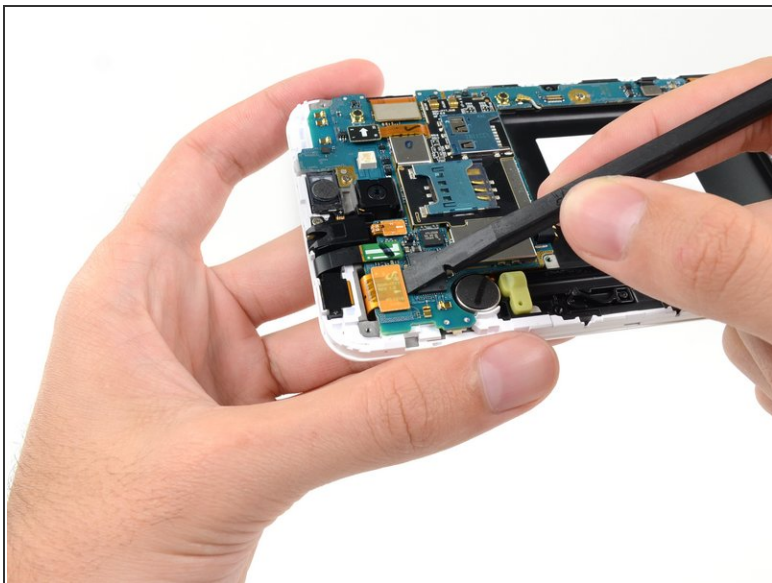

- Use the flat end of a spudger to carefully disconnect the display cable connector.

Step 2



- Use a spudger to disconnect the front-facing camera assembly cable connector.
- Disconnect the headphone jack/earpiece speaker assembly cable connector.
- Disconnect the digitizer cable connector.

Step 3





- Disconnect the soft button cable connector with the flat end of a spudger.
- Use a spudger to disconnect the USB board cable connector.
- Disconnect the antenna cable connector.

Step 4



- Remove the two 3.4 mm Phillips #00 screws securing the motherboard to the display assembly.

Step 5

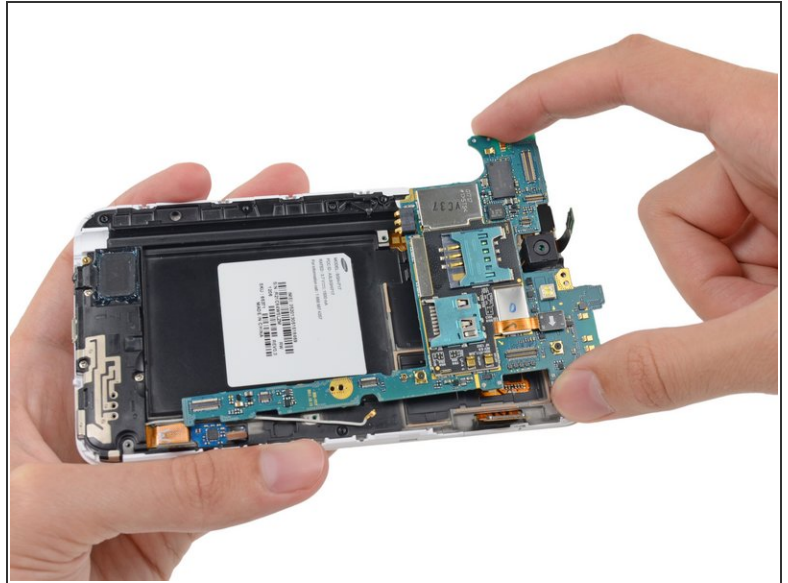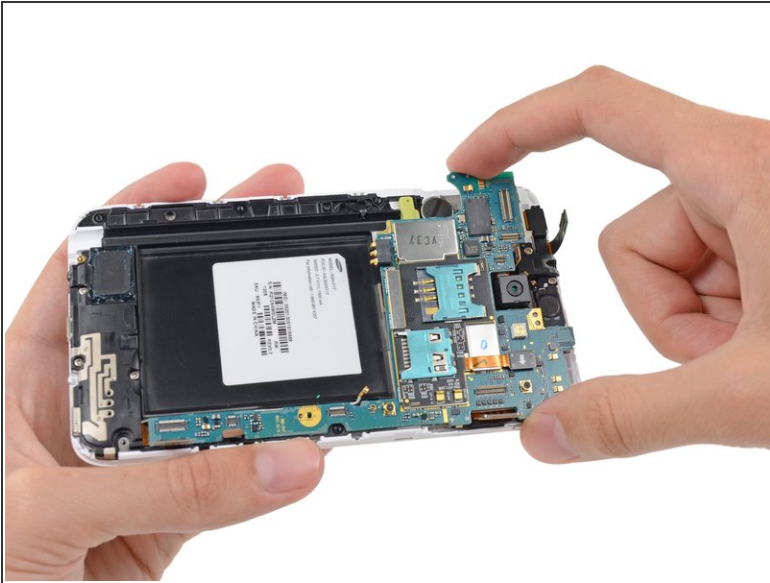

- Remove the motherboard assembly from the display assembly.

To reassemble your device, follow these instructions in reverse order.