



Rogue G10 Teardown

Since I was waiting for parts for the amp, I figured I might as well provide a teardown. This is a small beginners amp and relatively easy to work on.

Written By: oldturkey03



INTRODUCTION

Here is a relatively inexpensive and small guitar amp. This particular one needed some repair. So while I was waiting for parts, I figured I might as well make a teardown.



TOOLS:


- [Pro Tech Toolkit](#) (1)
-

Step 1 — Rogue G10 Teardown



- Here is the front view of the Rogue G10 amp.
- Back side shows 4 Phillips head screws that need to be removed.
- Here are the 4 #6x1" screws

Step 2

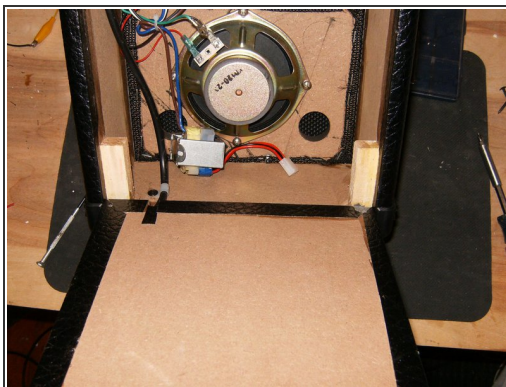

- Use a small screwdriver or other small suitable prying instrument to remove the back cover.
- With the back cover removed the speaker and amp become visible.
- Remove the 2 Phillips head screws from the carrying handle. These two screws also attach the amp to the inside of the case.

Step 3



- Here are the two screws from the handle. They are 1/8"x1 1/4"
- Remove the 16 screws from the plastic corners. These corners serve no purpose other than decoration.
- There are 4 rubber feet on the bottom of the amp.

Step 4



- This shows the corners with the screws removed.
- Remove the rubber feet by removing the Phillips head screws.
- On the left and right side of the amp is a Phillips head screw, located 1/3 down from the top and to the front. These two screws hold the front panel to which the speaker is attached. Remove those.

Step 5



- Here is the one on the right side, same location.
- Remove it as well
- With those two screws removed, the front panel which houses the speaker, can be simply removed

Step 6



- remove the front panel and place aside.
- With the front panel removed, the amp will now simply lift out as well
- Here is the amp totally disassembled. Straight forward job. No glue, no hidden screws.