



iPhone 5s Rear Facing Camera Replacement

Prerequisite to remove the camera after the...

Written By: Sam Goldheart



INTRODUCTION

Prerequisite to remove the camera after the logic board.


TOOLS:

[Tweezers](#) (1)

PARTS:

[iPhone 5s Rear Camera](#) (1)

Step 1 — Rear Facing Camera

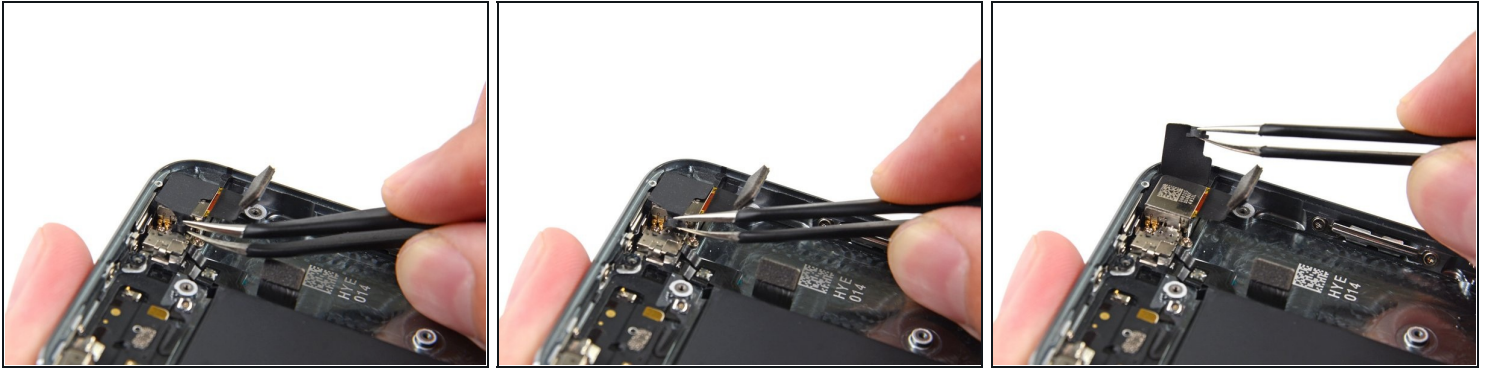

- Using a pair of [tweezers](#), flip the rubber camera cover out of its clip and toward the outside of the rear case.

⚠ Do not attempt to fully remove this cover. It is attached to the rear case and only needs to be flipped open, not removed.

Step 2



- Remove the rear-facing camera from the rear case.
 - ☑ During reassembly, the camera cable should bend in a 'U' shape to slot in behind the logic board.
 - ☑ If the rubber camera bumper has shifted, be sure to replace it before reassembling your iPhone.
-

To reassemble your device, follow these instructions in reverse order.