



Asus V6800V Hard Drive Replacement

Written By: Jong Park






TOOLS:

- [Phillips #0 Screwdriver](#) (1)
 - [iFixit Opening Tool](#) (1)
-

Step 1 — Hard Drive

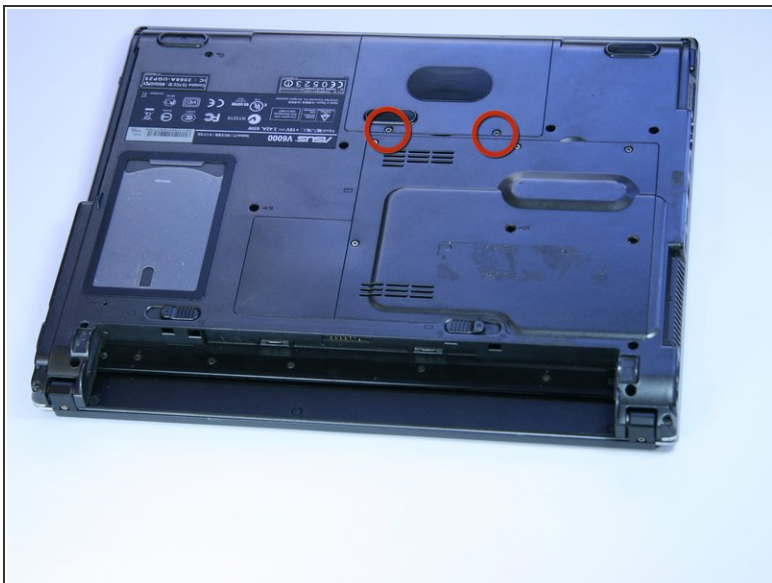


- Remove the two screws using a Phillips #0 screwdriver.

Step 2




- Pry open the case using an iFixit opening tool.
- ⓘ Actual hard drive is not shown in the second image.

Step 3

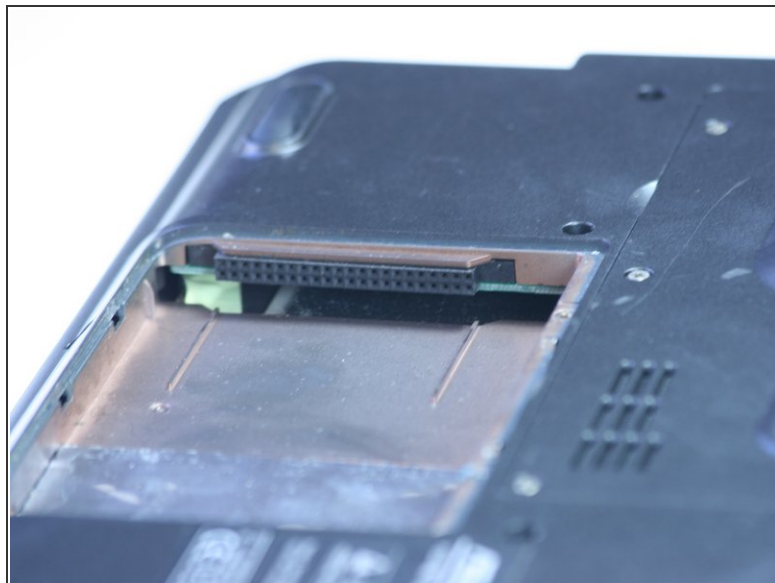

- The highlighted area is where your hard drive would be. Slide it out away from its slot and pull it gently to remove.

 Second image shows what it should look like once you remove the hard drive.

To reassemble your device, follow these instructions in reverse order.