



Sony Pulse Elite Edition Battery Replacement

When working with electrical components, be...

Written By: Chris Echter



INTRODUCTION

When working with electrical components, be sure to avoid loose wires.


TOOLS:

Phillips #00 Screwdriver (1)

Spudger (1)


Safety Glasses (1)

Step 1 — Identifying Earpiece

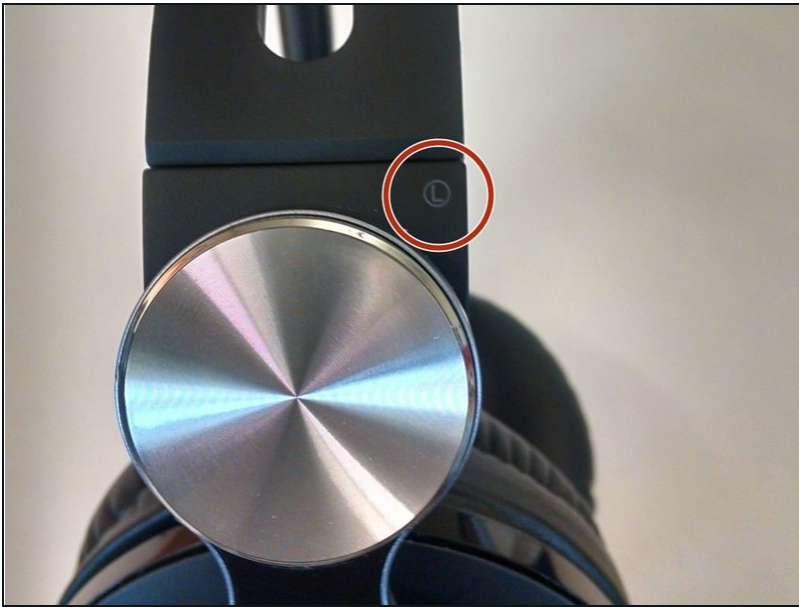

- Locate the left side designation on the headband-earpiece junction.
- The battery is in the right earpiece.
- The motherboard is in the left earpiece.

Step 2 — Ear Cushion Removal

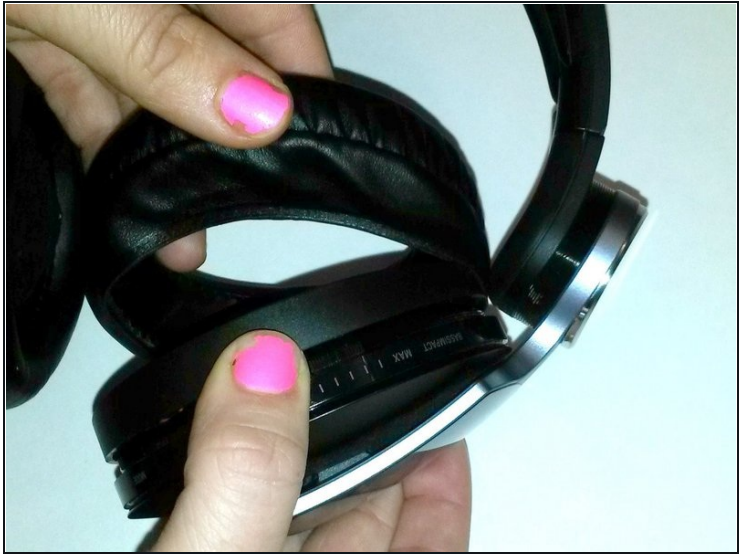

- Gently pull around the perimeter of the left ear cushion until it comes off.


Step 3 — Outer Ear Rim Removal



- Use the PH00 Screwdriver to remove the three Phillips 6mm screws around the perimeter of the ear cup.
- Gently pull the outer ear rim off of the headset assembly.


⚠ Harsh removal may cause permanent damage to the speaker wires.

Step 4 — Remove Speaker Housing

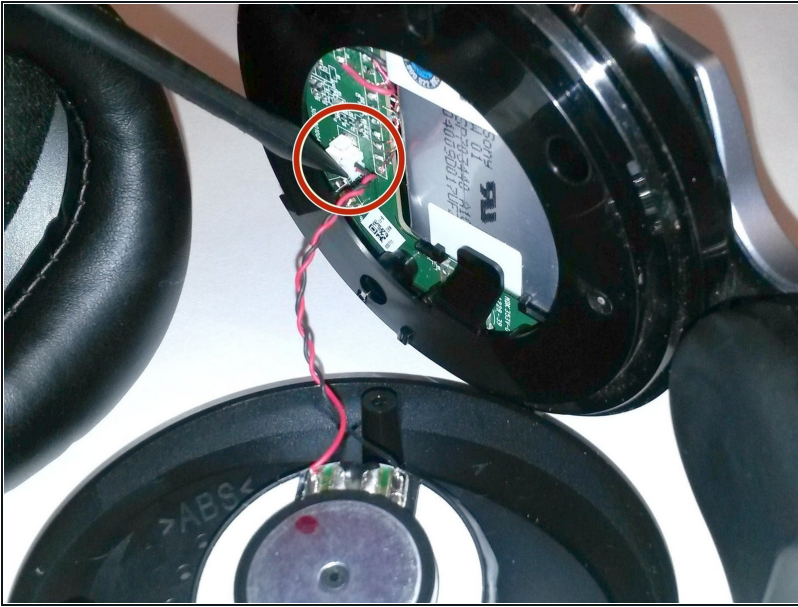

- Using [tweezers](#), gently pry the red and black speaker wires from the attached socket.

Step 5 — Remove Battery

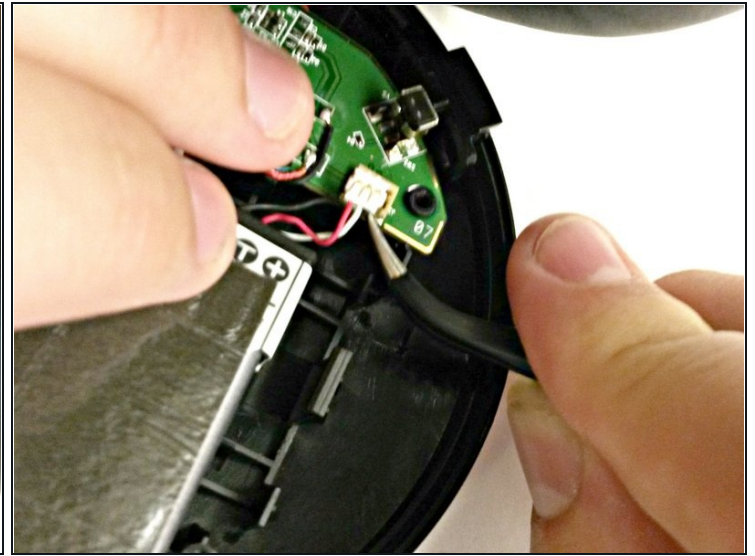

- Lift up battery and disconnect wires using [tweezers](#).
- Use a new battery for reconstruction.

To reassemble your device, follow these instructions in reverse order.