




Repairing Turtle Beach PX22 Sticky Volume Wheels

If your in-line amplifier has stuck or sticky...

Written By: James de Iturrondo

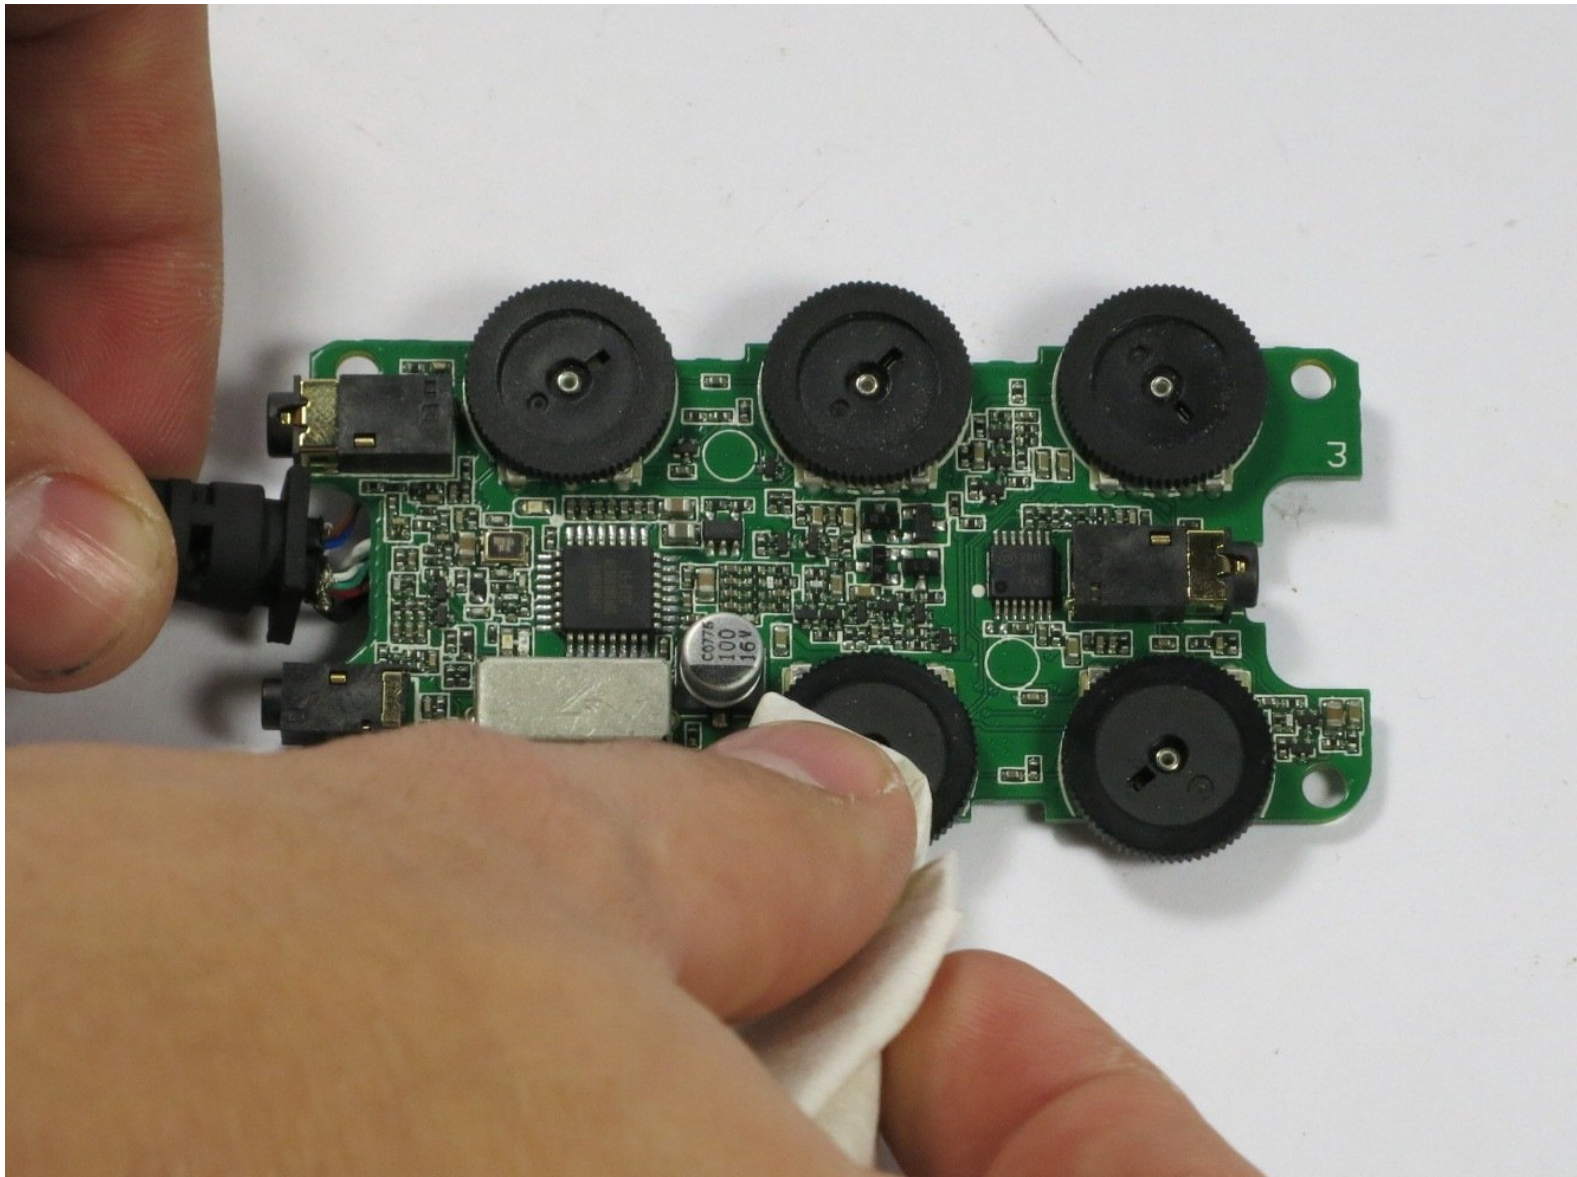

INTRODUCTION

If your in-line amplifier has stuck or sticky volume wheels then it may need to be cleaned.



TOOLS:



- [T6 Torx Screwdriver](#) (1)
-

Step 1 — Repairing Turtle Beach PX22 Sticky Volume Wheels




- Remove the 4 screws from the inline amplifier using a #6 torque screwdriver head. The screws measure 1/4" long and 3/32" in diameter.
- Open the amplifier by using the smaller plastic opening tool. Place it in the headphone jack and use leverage to pry open the plastic halves.
 - ⓘ Be aware of the small plastic cylinder that braces the headphone jack.

Step 2

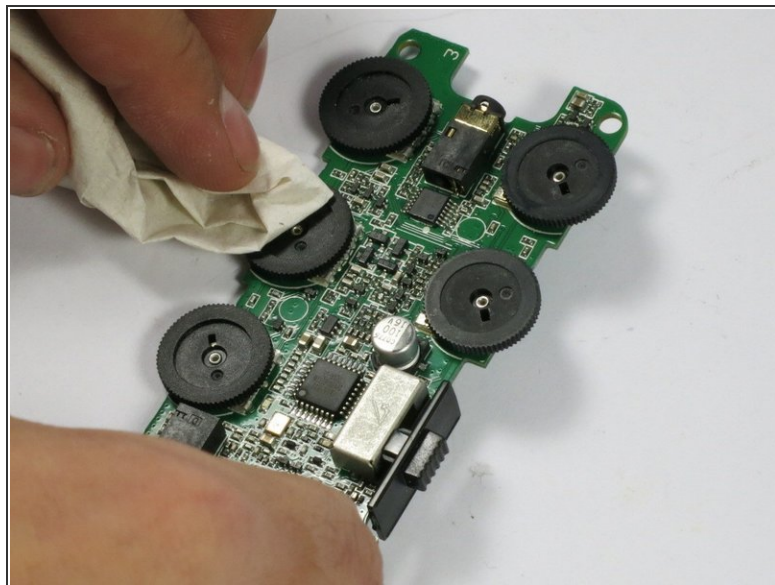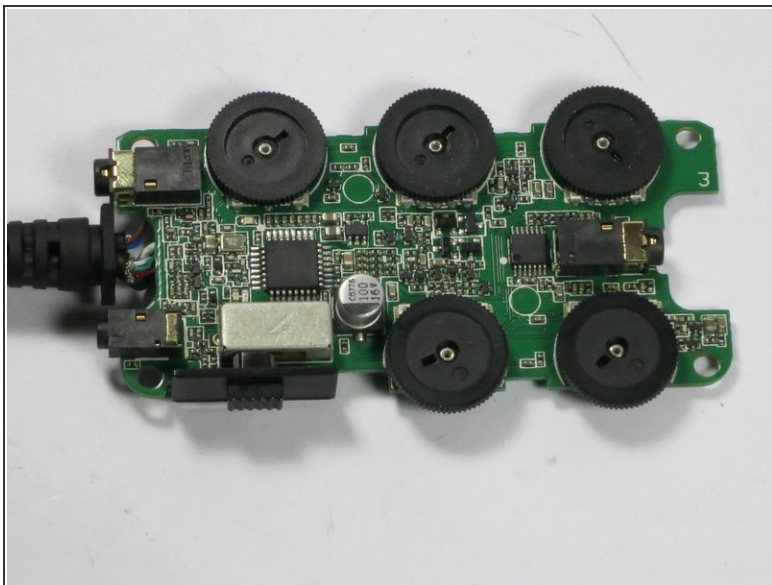

- Remove the circuit board from the plastic housing and flip it so that you can see the scroll wheels.
 - Using a cloth dipped in isopropyl rubbing alcohol, clean the affected scroll wheels.
- ⓘ 90-100% isopropyl alcohol is preferred for cleaning.

Step 3

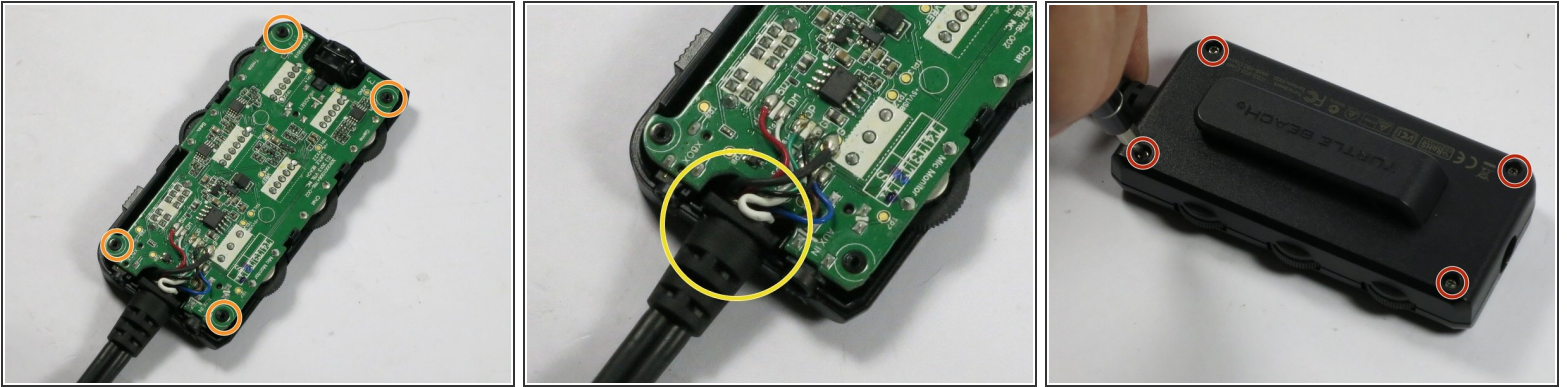

- When done cleaning, place the circuit board back in the plastic housing.
 - The scroll wheels should be facing the housing with the logo and labels, and should slide onto the 4 screw holes.
- Make sure the plastic headphone jack brace is in position.
 - Position the wire in the slot on the other side of the amplifier, *it should slide down onto the housing and become fixed.*
- Close the housing with the other plastic half. It will click into place.
- Replace the 4 screws using the #6 torque screwdriver.

To reassemble your device, follow these instructions in reverse order.