




# NuVision TM1088 Battery Replacement

Replacing a battery to restore battery life of device. (Requires soldering)

Written By: Nathaniel Nasman

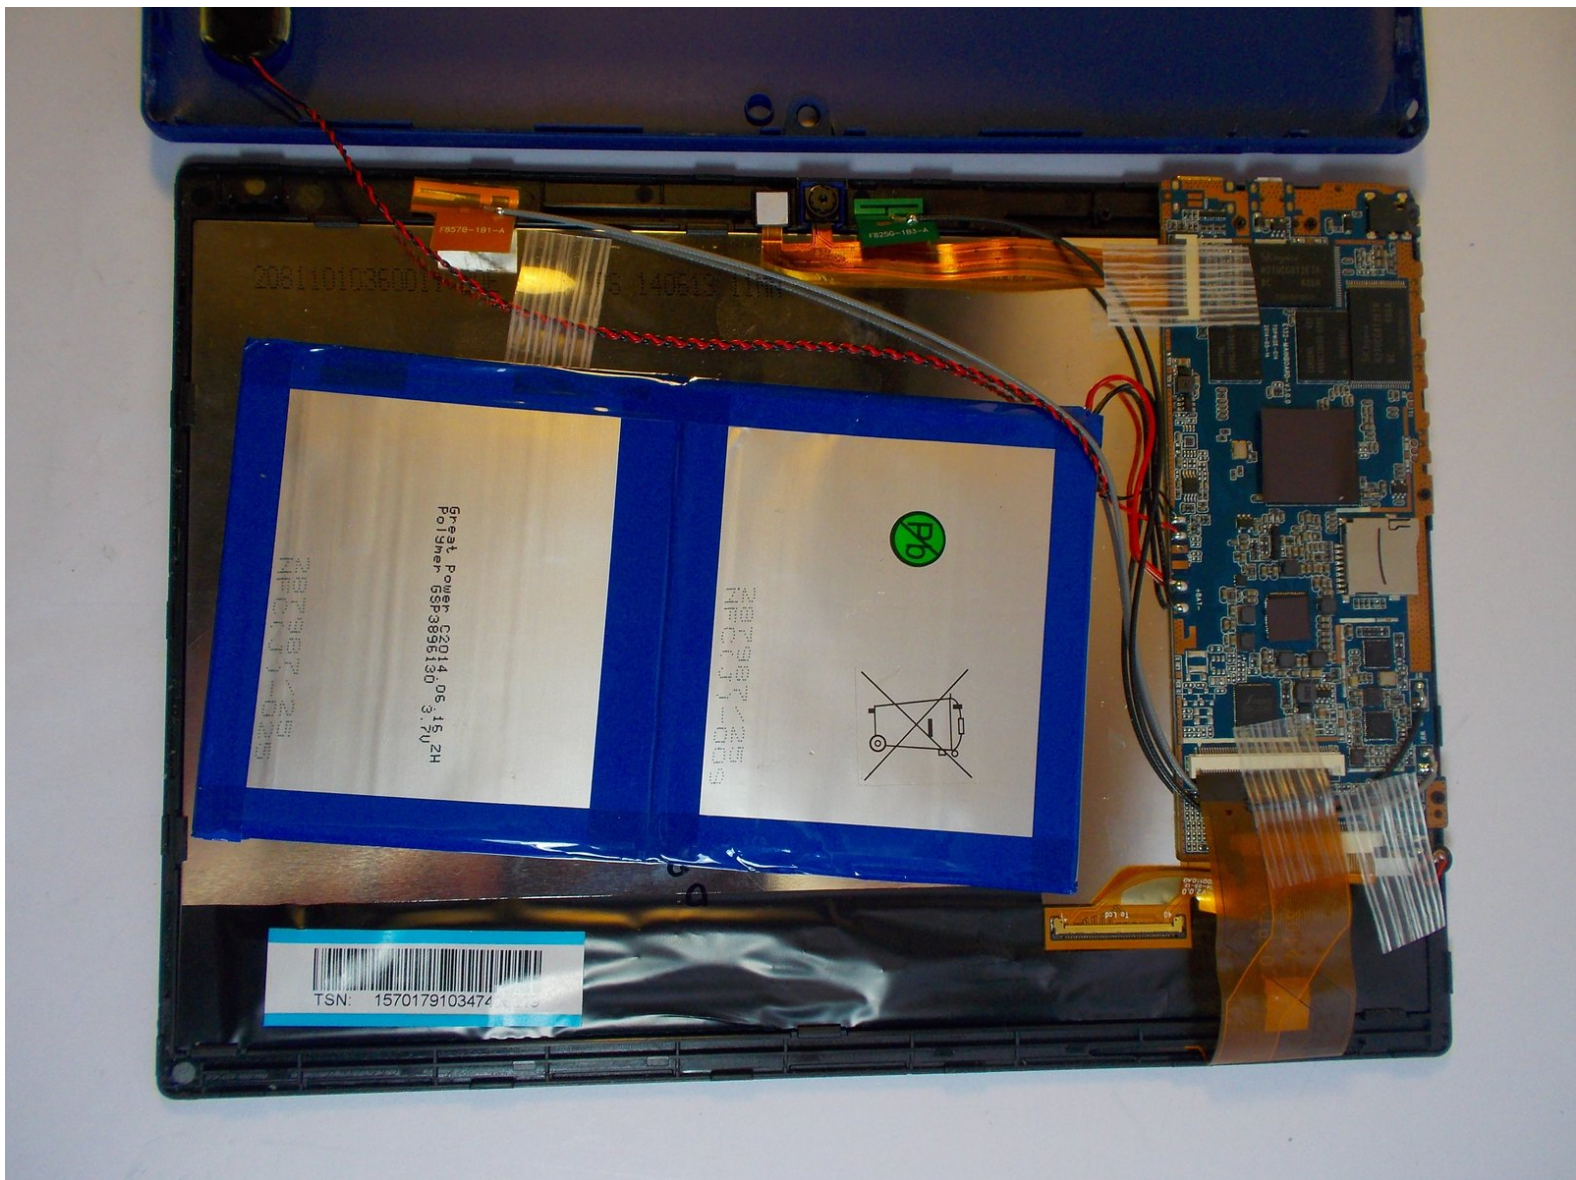

---

## INTRODUCTION

Replacing the battery is a fairly simple process. It consists of opening the device and removing the solder holding the battery's wires.

---

### TOOLS:


- [iFixit Opening Tools](#) (1)
  - [Soldering Iron](#) (1)
-

## Step 1 — Rear Cover



- Place the plastic opening tool between the front and rear cover and pry up on each corner of the cover.


## Step 2 — Battery

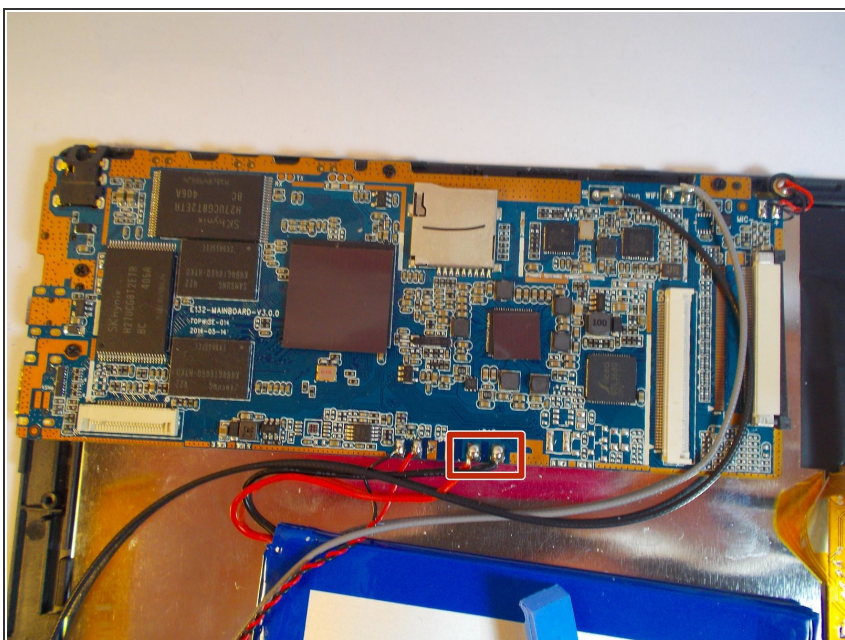

- Melt the solder on the red and black wires and remove wires.



## Step 3

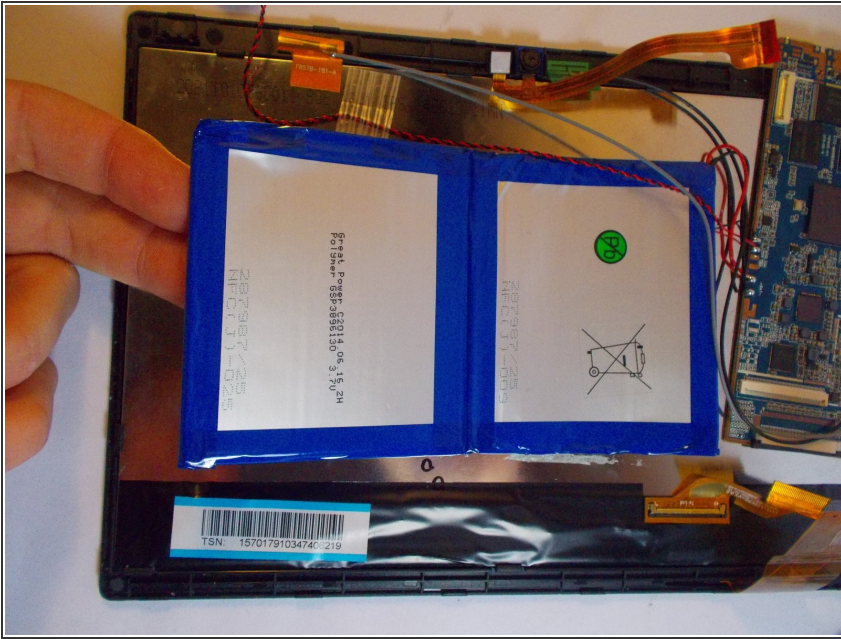

- Peel the battery from the front panel. Be careful not to puncture the battery.

To reassemble your device, follow these instructions in reverse order.