




# LG G Watch Rear Case Replacement

Use this guide to replace the rear case on your...

Written By: Geoff Wacker

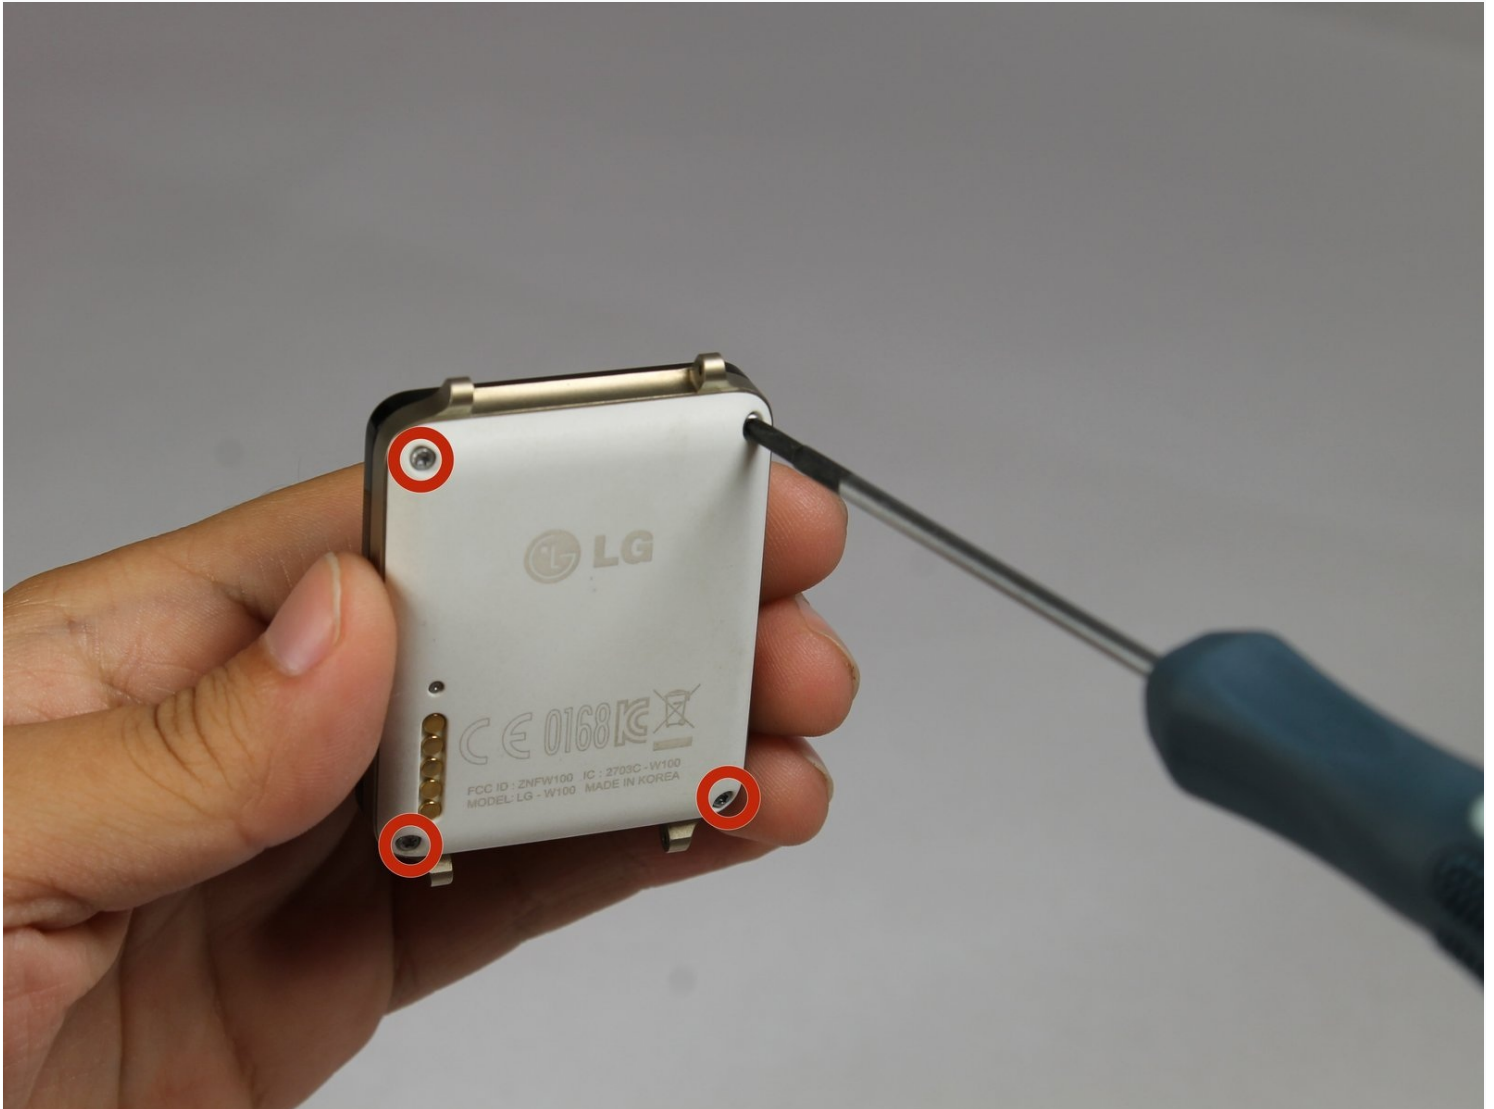

# INTRODUCTION

Use this guide to replace the rear case on your LG G Watch.

## TOOLS:

[Tweezers](#) (1)

[T5 Torx Screwdriver](#) (1)



[iFixit Opening Picks \(Set of 6\)](#) (1)

## Step 1 — Wristband



- ① Spring bars attach the two halves of the wristband to the watch body. The spring bar has a shoulder on either end.
- ① Be prepared to apply some pressure with your fingers to perform the following action.
  - First, slide the wristband down on the spring bar to expose the shoulder of the spring bar.
  - Grasp the exposed shoulder with the [tweezers](#) to perform the next step.

## Step 2

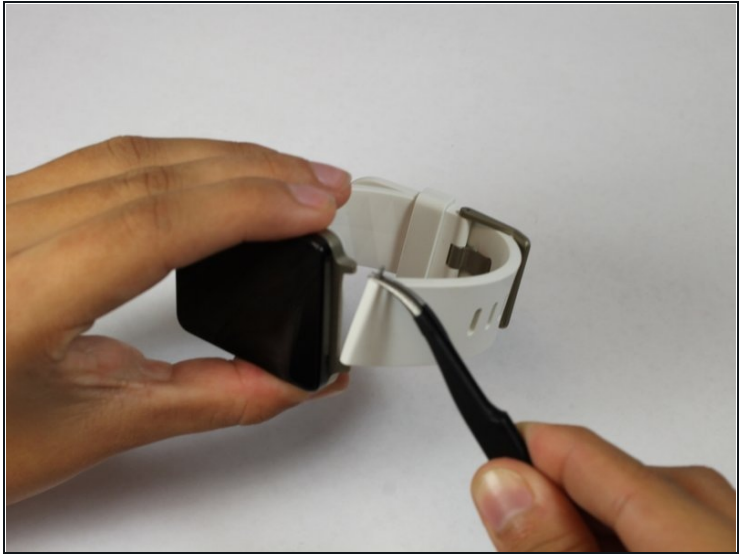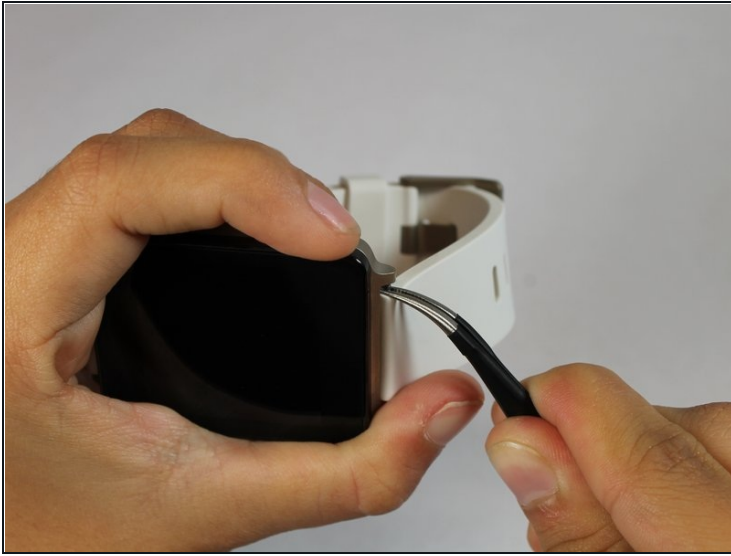


**⚠ This is a challenging step. Do it carefully to prevent the spring bar from flying out of the wristband.**

- Use the tweezers to depress the spring bar so that it collapses by a few millimeters and pops out of the hole that was holding it in place.
- Now carefully pull the other end of the spring bar to detach the wristband from the watch face.



**★ Repeat steps 1 and 2 for the other wristband.**

### Step 3 — Rear Case

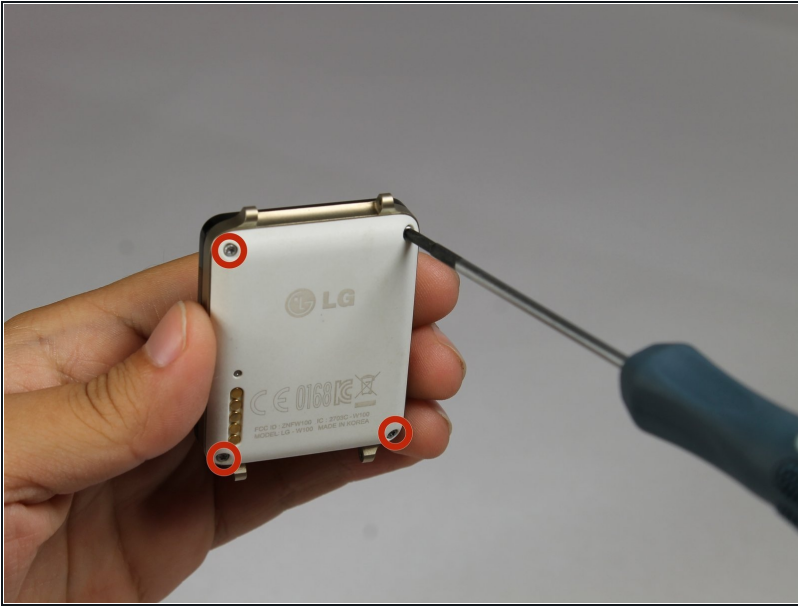

- Use the T5 Torx screwdriver to unscrew the four silver 2mm x 3mm T5 screws that hold the back cover in place.

### Step 4

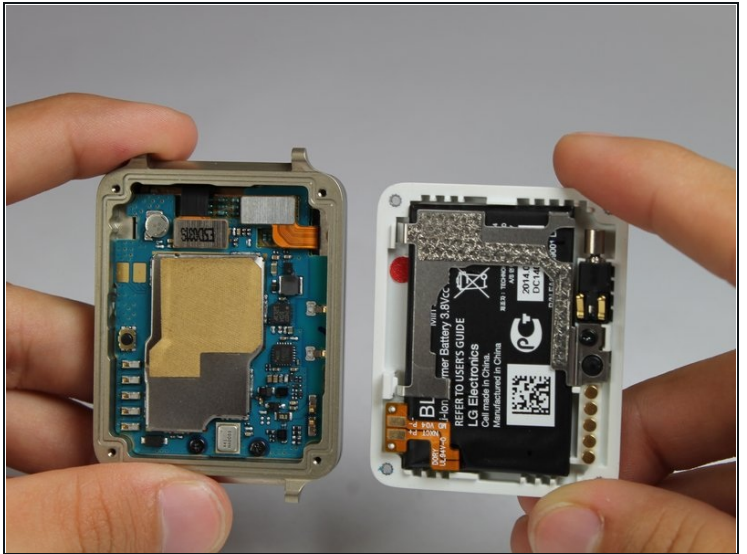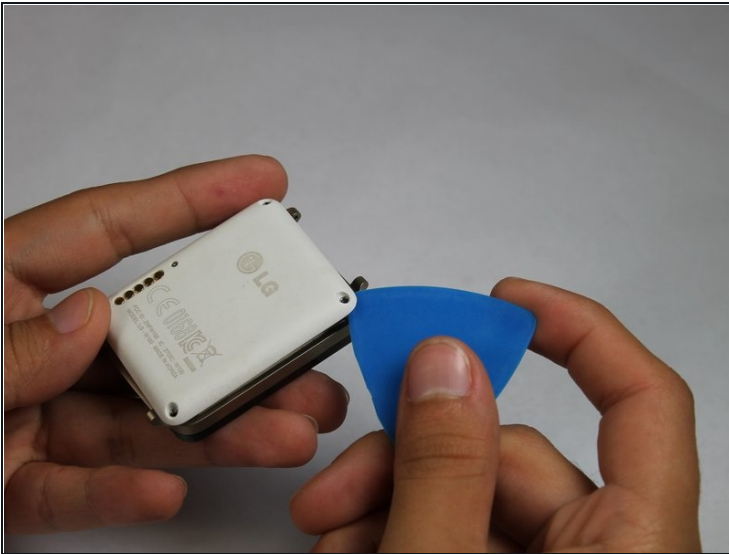

- Slide the opening pick between the rear case and the rest of the device to separate the two halves.
- Gently pull the two halves apart.

To reassemble your device, follow these instructions in reverse order.

