




Asus Transformer Pad TF103C Battery Replacement

Replacing the battery on an Asus Transformer Pad TF103C.

Written By: Kelsey Korin Sovik

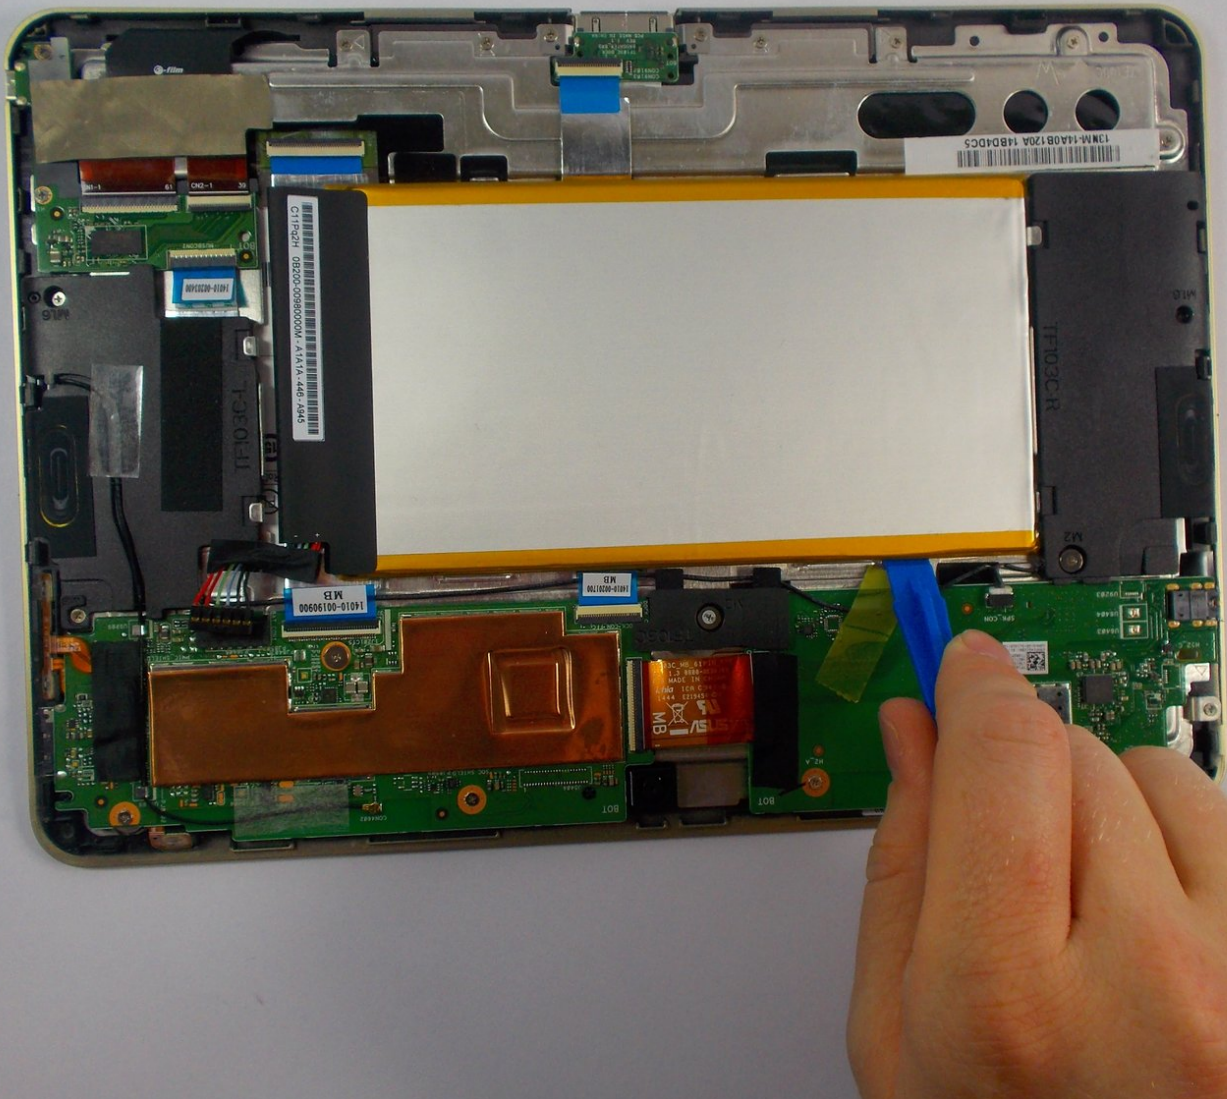

INTRODUCTION

Is your Asus Transformer Pad (TF103C) not charging? Does the battery not last very long? This guide will walk you through the steps of replacing the battery of the Asus Transformer Pad.

Replacing the battery is relatively simple. It only takes 5 steps to complete. Very basic tools are required, but can be switched out for more common tools.

Remember, punctured batteries can cause dangerous fires, so use caution when handling the battery.



TOOLS:


- [iFixit Opening Tools](#) (1)



PARTS:

- [ASUS Transformer Pad \(TF103C\) Rear Panel](#) (1)

Step 1 — Battery

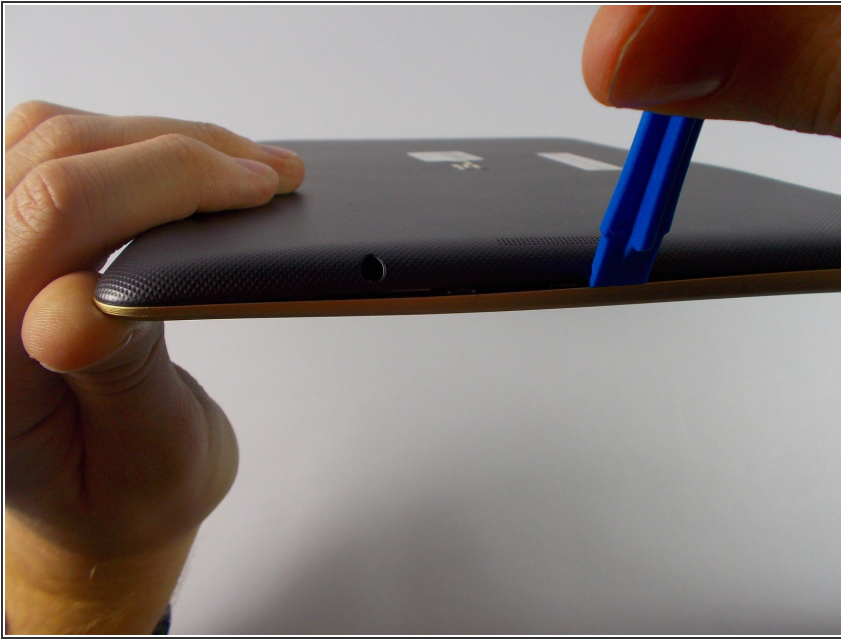


- Make sure the power is off.
- Insert the plastic opening tool into a crack on side of the tablet.
- ⓘ You can use a thin screwdriver if you don't have the opening tool.
- Carefully pull the tool upwards to and pry open the Transformer pad.
- ⚠ Make sure the SD card slot is empty first.

Step 2




- Slide the tool in the gap along all four sides, continually pulling the tool upwards.

Step 3

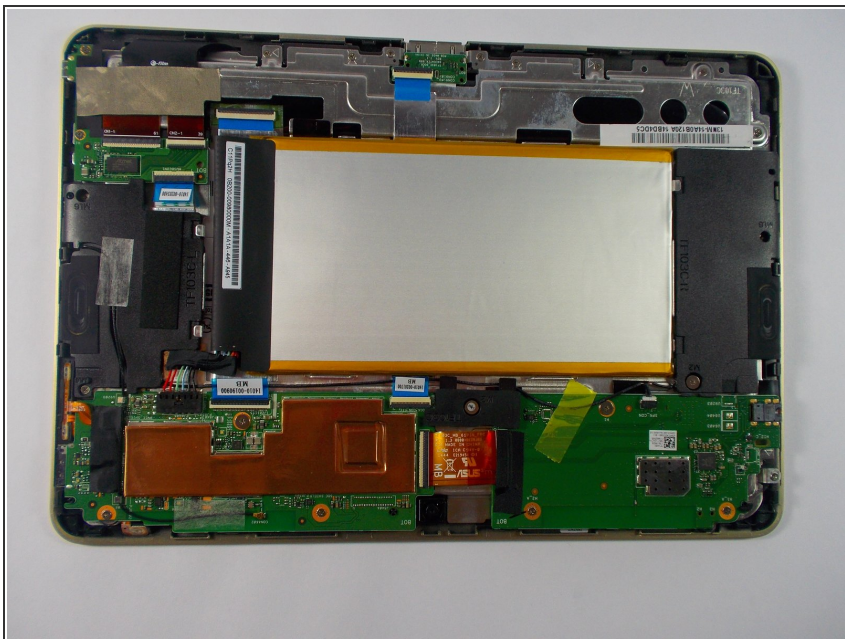

- Remove the back cover once it is loose and set it aside.
- Rotate the tablet so it matches the picture.

Step 4

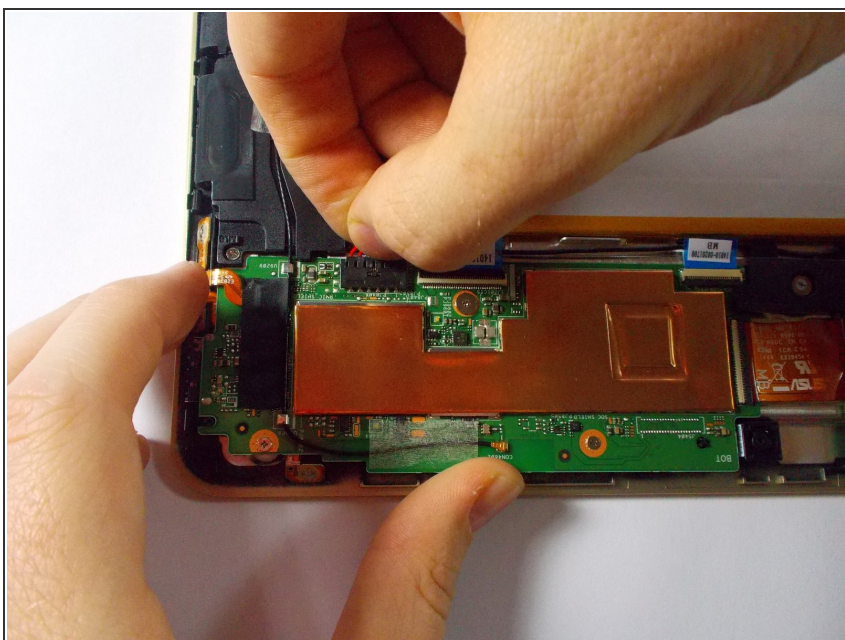

- Carefully unplug the battery cable from the motherboard by grabbing the wires close to the black piece and pulling it out of the housing.

Step 5



- Carefully pry the battery out of the tablet with the opening tool.
- ⓘ Replace battery with a new +3.7V=19Wh Li-polymer Battery Pack C11P1328.
- ⓘ There may be some tape on the battery, so you may hear pulling as you pry.

To reassemble your device, follow these instructions in reverse order.