



Samsung Epix Keyboard Replacement

Step-by-step guide to replacing your old worn...

Written By: Chris



INTRODUCTION

Step-by-step guide to replacing your old worn out keyboard buttons.

TOOLS:

[Phillips #00 Screwdriver](#) (1)


[iFixit Opening Tool](#) (1)

Step 1 — Battery




- Press button on back of phone below camera.
- While button is depressed, remove the back panel of the phone by it sliding off (not shown in picture).

Step 2

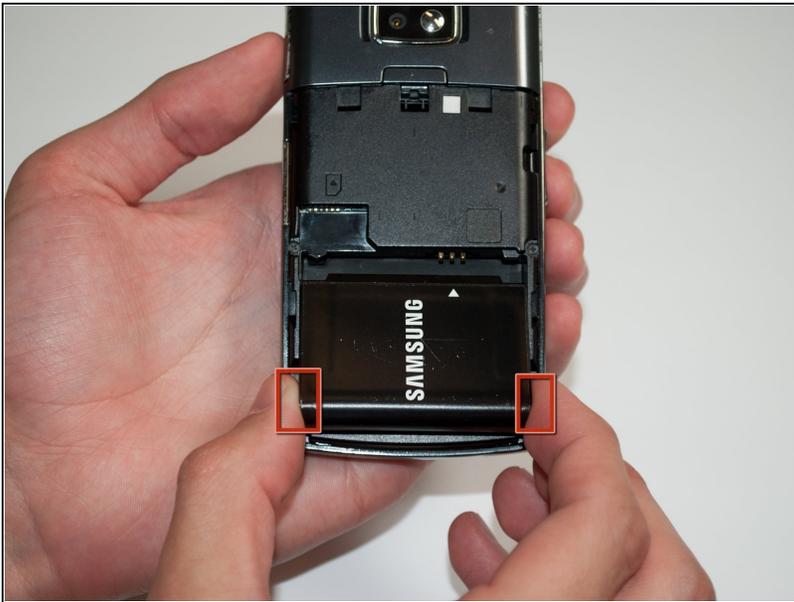

- Grasp the bottom corners of the battery with two fingers and gently lift.

Step 3 — Keyboard

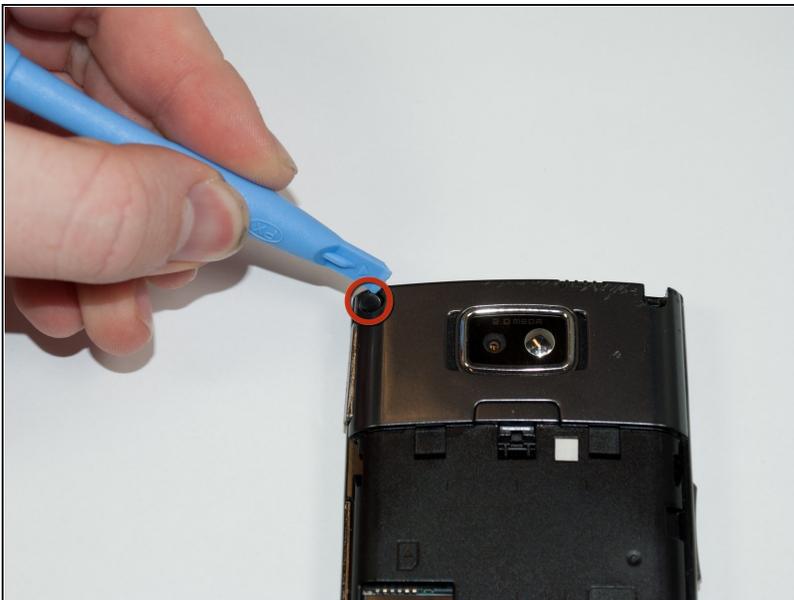

- Using an iPod opening tool, remove the screw cover in the top left corner by lifting it up.

Step 4



- Use the Phillips #00 screwdriver to remove the six screws on the back of the phone. Three are evenly spaced on each side.
- ⓘ The upper right screw is 4.5mm while the rest are 6.5mm.

Step 5



- Slide the iPod opening tool into the seam on the side of the phone and turn it slightly to unhook the eight clips.
- ⓘ There are three clips on each side and two at the bottom of the phone.

Step 6



- Once all eight of the clips have been unhooked, lift the back panel off of the phone.

⚠ Be careful not to remove the front panel. It is still connected to the phone chassis by a ribbon cable located in the bottom right side of the motherboard.

Step 7



- Using an iPod opening tool, unlatch the ribbon cable located in the lower right corner of the motherboard.
- Carefully remove the ribbon.

Step 8



- Remove the front faceplate.

Step 9



- Grasp the rubber keyboard in the corner with your fingers and lift to remove.

To reassemble your device, follow these instructions in reverse order.