



HP Stream 8 Speakers Replacement

This guide will provide a step-by-step walk...

Written By: Nick Miller



INTRODUCTION

This guide will provide a step-by-step walk through on replacing the speakers in a HP Stream 8.

TOOLS:

[Phillips #00 Screwdriver](#) (1)

[Tweezers](#) (1)

[Soldering Iron 60w Hakko 503F](#) (1)

Step 1 — Midframe



- Use your nail or a spudger to pry the back cover off of the device.

Step 2




- Slide your finger around the rest of the back cover, lifting it completely off of the device.

Step 3




- Remove ten Phillips #00 screws from the inside cover.

Step 4

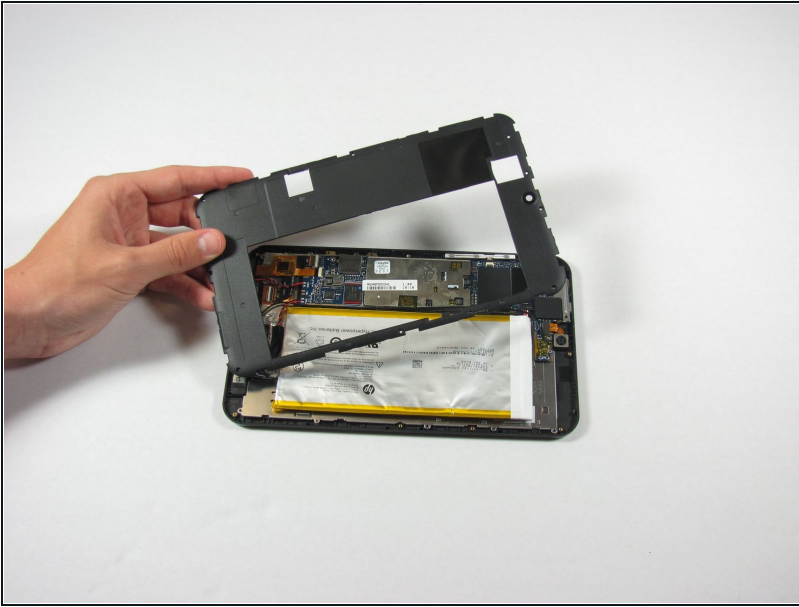

- Pry up the inside cover the same way as in the first step.

Step 5 — Speakers

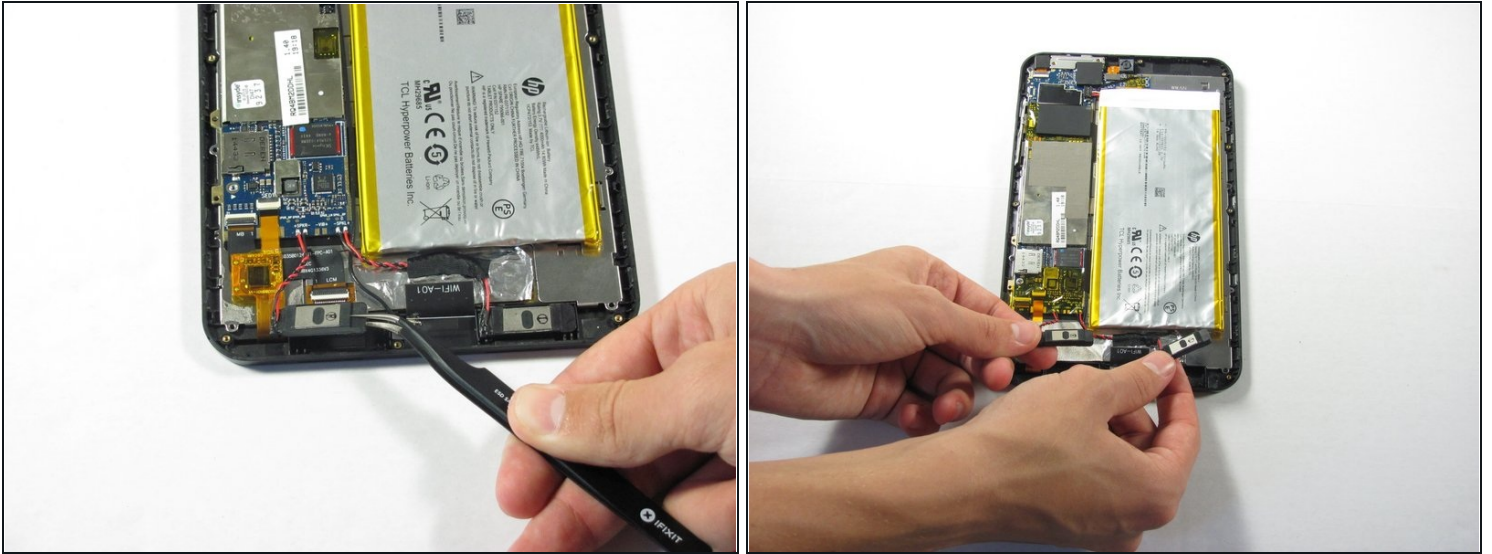

- Locate the two speakers at the bottom of the device.
 - Remove the two speakers by prying them out using a pair of tweezers.
 - Detach the red and black power wiring from the device and pull the speakers entirely out of the HP Stream 8.
- ☒ Remember where the red and black wiring is connected to the device.

⚠ The power wires are soldered to the device and will be difficult to detach.

Step 6



- Grab the two replacement speakers and the soldering iron.
- Locate where the red and black power wiring previously connected to the device.
- Attach and re-solder the red and black power wiring.
- ① For soldering help, check out iFixit's [How to Solder and Desolder Connections](#) guide.

To reassemble your device, follow these instructions in reverse order.