



Disassembling and cleaning of the filter holder on a Quickmill 0385

This guide shows how disassemble and clean the filter on the Quickmill 0385

Written By: Regis Funke



INTRODUCTION

A free workspace and prepared tools is always advisable.



TOOLS:

- [Manta Driver Kit - 112 Bit Driver Kit](#) (1)
 - [Frictionless Ratchet](#) (1)
-

Step 1 — Disassembling and cleaning of the filter holder on a Quickmill 0385



- Remove the black tray for an easier disassembly

Step 2



- Move the steam nozzle to the side to have it out of the way.

Step 3



- Remove the flat head screw in the center of the filter holder.

Step 4



- Remove the screen.

Step 5



- Remove the gasket.

Step 6



- Now we have all the parts removed: the screen, the gasket, the hollow screw, the spring and the valve.
- Remove the pin first.

Step 7



- Remove the spring.

Step 8




- Remove the metal plate.

Step 9



- You are left with the screen and the hollow screw.

Step 10

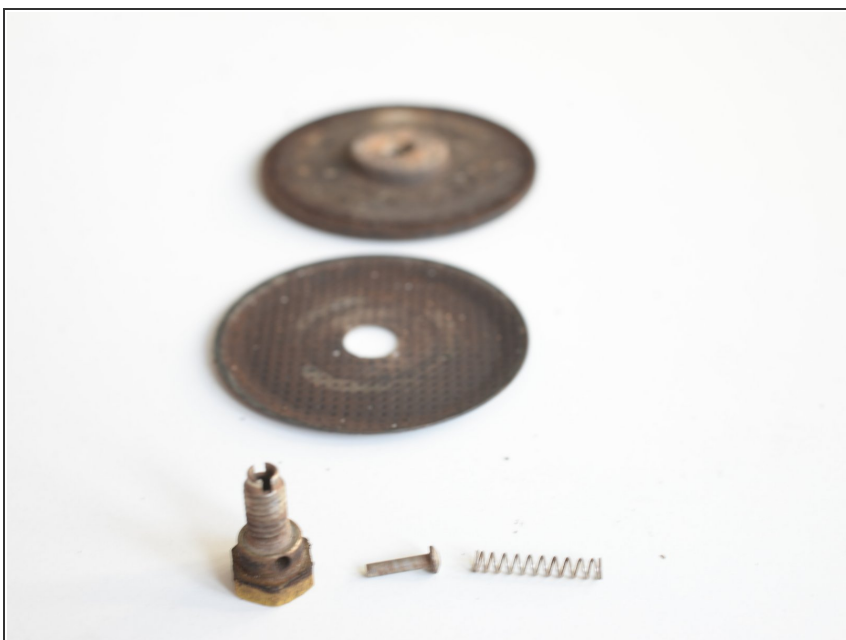

- All parts can be cleaned individually now.
- It is advisable to also clean the socket of the filter on the machine.
- Reassemble the parts in reverse order after cleaning.
- Enjoy your coffee!

Now clean the individual pieces and reassemble in reverse.