




Samsung Captivate Antenna Cable Replacement

If your Samsung Captivate is not connecting to...

Written By: Drew Bentz

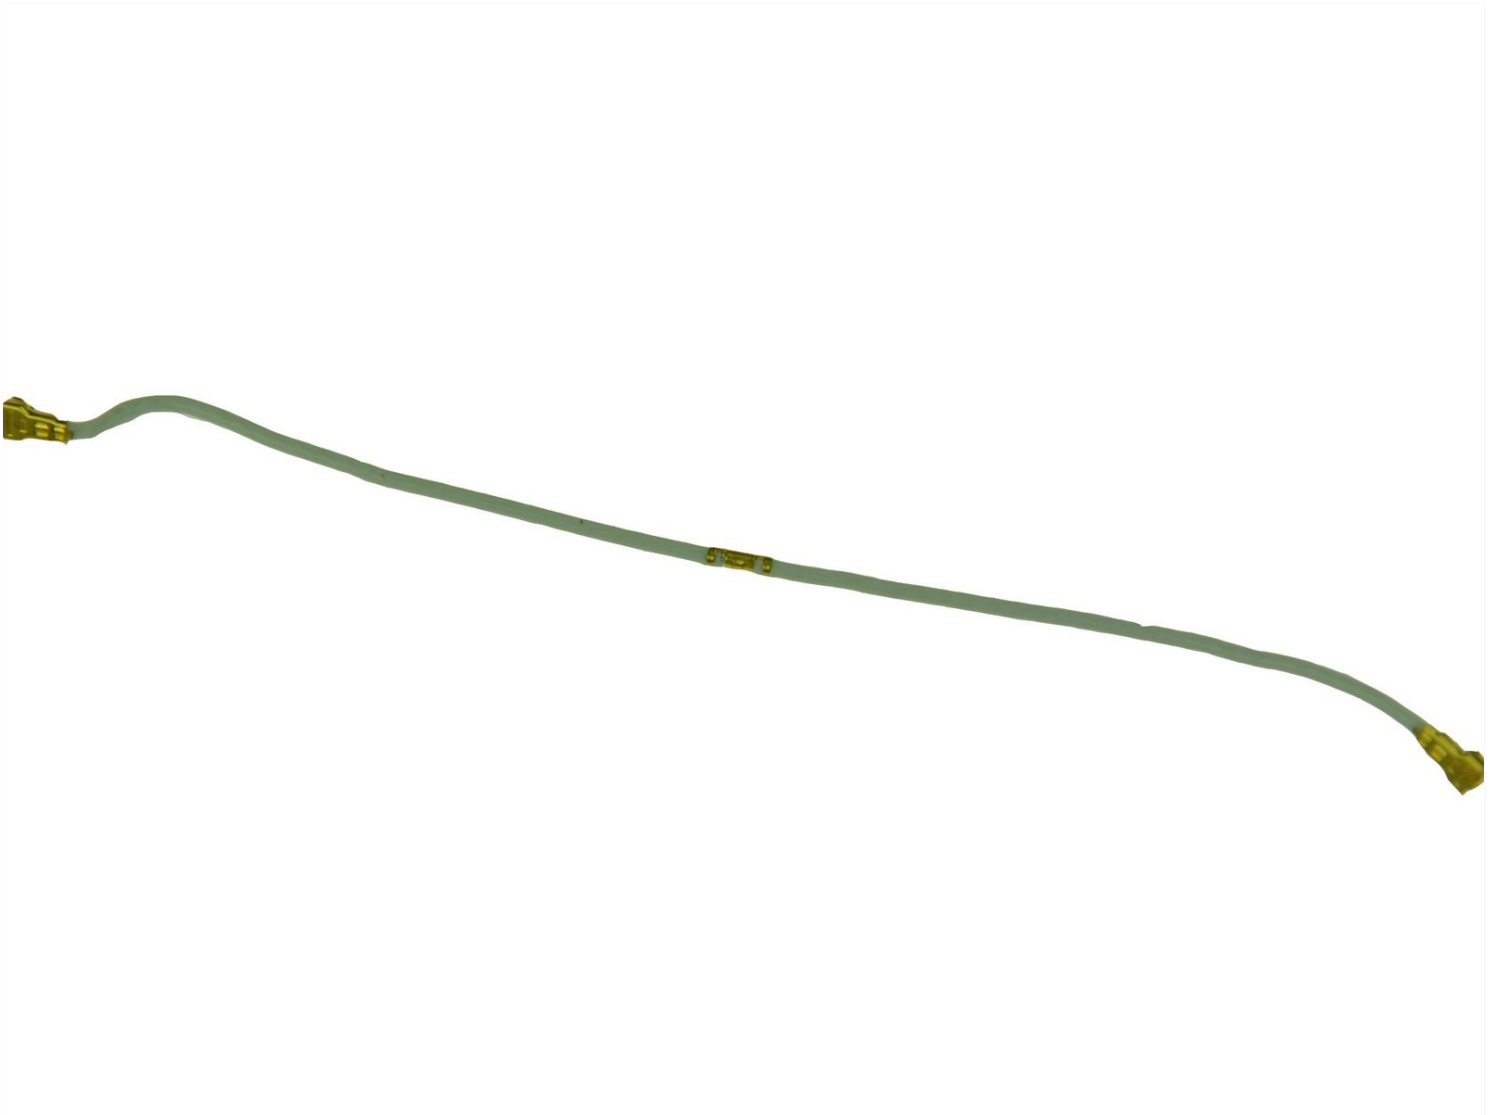

INTRODUCTION

If your Samsung Captivate is not connecting to the network, one problem could be a faulty antenna cable. Replacing this part is very simple and can be accomplished by anyone.

TOOLS:

Phillips #000 Screwdriver (1)

Spudger (1)

Step 1 — Battery



- Remove the back cover by pressing on the bottom section of the phone and sliding the bottom piece downward.
- Lift up the back cover.

Step 2



- Place your finger on the bottom of the battery and lift to remove.

Step 3



- Replace the old battery with the new one.

Step 4 — Rear Case



- Insert the spudger underneath the bottom section of the phone.
- Gently lift and push the spudger to slide the bottom section down to reveal two hidden screws.

Step 5



- Remove the six 4.5mm #000 Phillips screws.

Step 6



- Starting at a bottom corner, use the spudger to separate the rear case from the front display.
- Move the spudger towards the top on both sides. The plastic opening tool is easier to use for this step.


⚠ Be careful when detaching the top. Free each side, stopping short of the center of the cover. Apply backward pressure on both corners with a finger applying pressure on the center, and slide the whole back cover toward the bottom of the device. Note: forcing the cover can result in cracked plastic.

Step 7



- Separate the rear case from the phone.

Step 8 — Antenna Cable

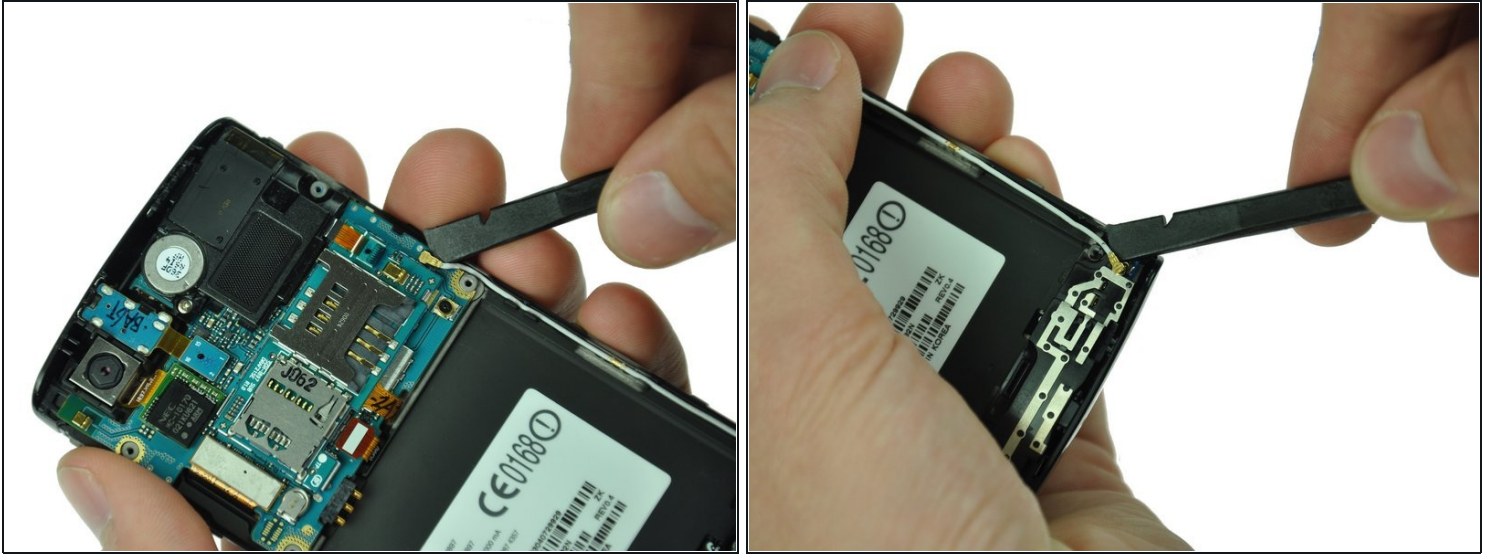

- Use a spudger tool to pry up the antenna cable from the connector on the motherboard.
- Pry up the other end of the cable from the connector on the antenna array.

To reassemble your device, follow these instructions in reverse order.