



iPhone 4S后面板更换

拆除后面板查看手机的内部组件。

撰写者: Walter Galan



介绍

拆除后面板查看手机的内部组件。



工具：

- P2 Pentalobe Screwdriver iPhone (1)



章节：

- iPhone 4S Blank Rear Glass Panel (1)
Fix Kit / Black
This kit contains the part and all tools needed.
- iPhone 4S Used OEM Rear Glass Panel (1)

A close-up photograph of a hand holding the back of an iPhone 4. The device is held horizontally, showing its silver metal band and black back cover. Two screws on the band are circled in red. The hand is positioned to show the back of the phone, with the fingers visible on the sides.

⚠ 开始拆卸前，请将 iPhone 的电池放电到25%以下。充满的锂离子电池在不小心的被刺穿的情况下可能会着火和/或爆炸。


- 拆机前，请先关机。
- 拆卸掉两颗3.6mm 五角 P2防撬螺丝。

 5号螺丝刀只能用一次，不用上太紧，以免滑丝。

A black iPhone 2G is shown from the back, held by two hands. The device features a silver metal bezel and a black back cover. The Apple logo is centered on the back, with the word "iPhone" printed below it. At the top left, there is a circular camera lens and a small "iSight" label. The hands holding the phone are positioned to show the back of the device against a plain white background.



- 从下往上推开后盖。
- ① 大概推出2mm的间隙。

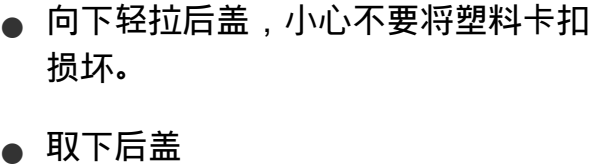

请按**逆序**重组你的设备。