



Remove iPhone 6 Plus LCD screen

Replace iPhone 6 Plus LCD screen by myself

Written By: rootmi



INTRODUCTION

For the official iFixit guide to replace your 6s Plus screen, [click here](#). The guide you are viewing is retained solely for historical purposes.

TOOLS:


- [Phillips #000 Screwdriver](#) (1)
 - [Suction Handle](#) (1)
 - [Tweezers](#) (1)
 - [iFixit Opening Tools](#) (1)
 - [P2 Pentalobe Screwdriver iPhone](#) (1)
-

Step 1 — Prepare the maintenance tools



- Prepare the tools to be used for maintenance

Step 2 — Shut down and remove the bottom screw

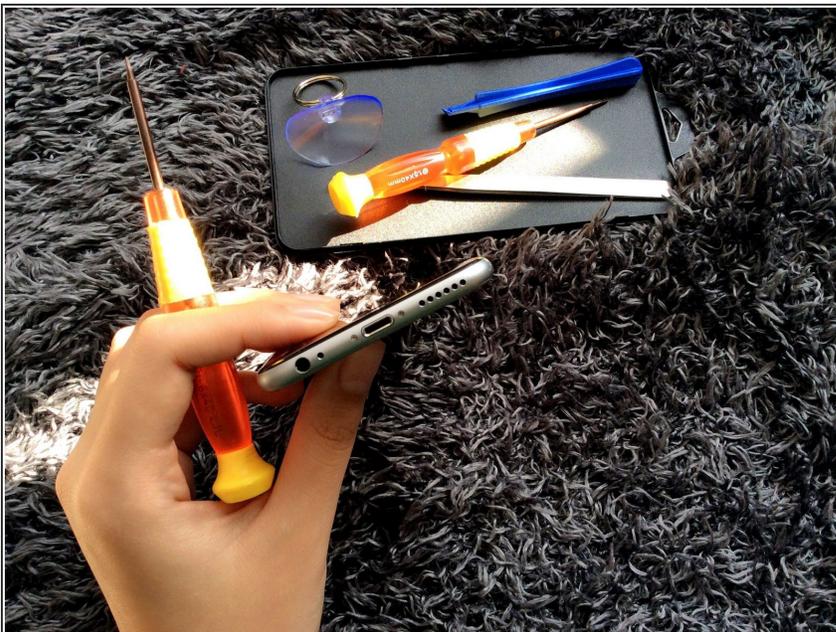

- Shut down the phone and remove the bottom screw

Step 3 — Suck up the LCD screen



- With the suction cup to suck up the LCD screen

Step 4 — Alice stick with the screen out of the three sides



- Alice stick with the screen out of the three sides, gently pull down the screen, and then you can open the screen.

Step 5 — Remove the five screws shown in the circle



- To maintain the 90-degree position, remove the five screws shown in the circle, be sure to place in accordance with the original location.

Step 6 — Unplug the four cable, separate screen



- Unplug the four cable, separate screen

Step 7 — Remove the cover of the front camera and the earpiece




- Remove the cover of the front camera and the earpiece. Screw position is still in the distance without interference as the original place away.

Step 8 — Unplug the front camera and remove the handset





- Unplug the front camera and remove the handset

Step 9 — Remove the photoreceptor

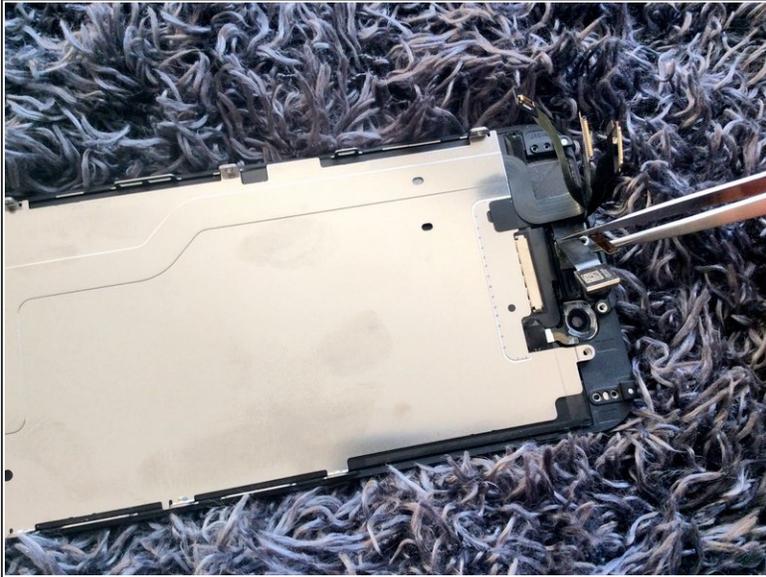

- Insert wisdom here.

Step 10 — Remove the home key and metal

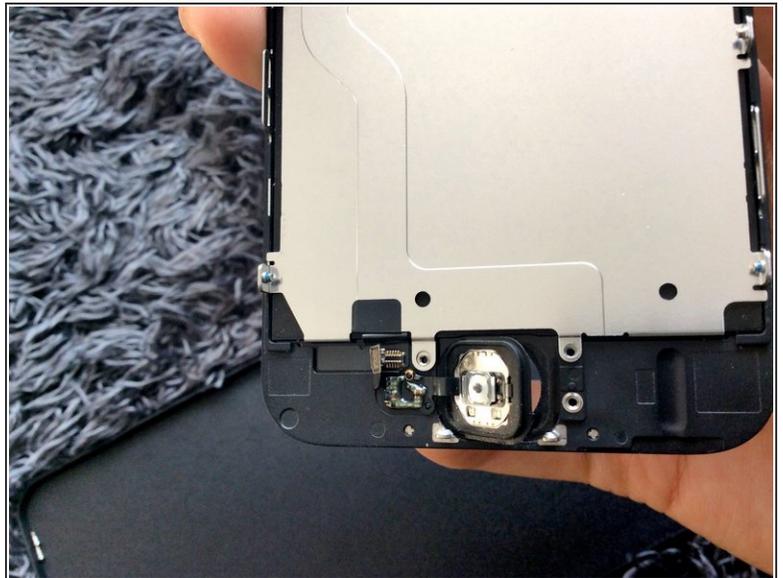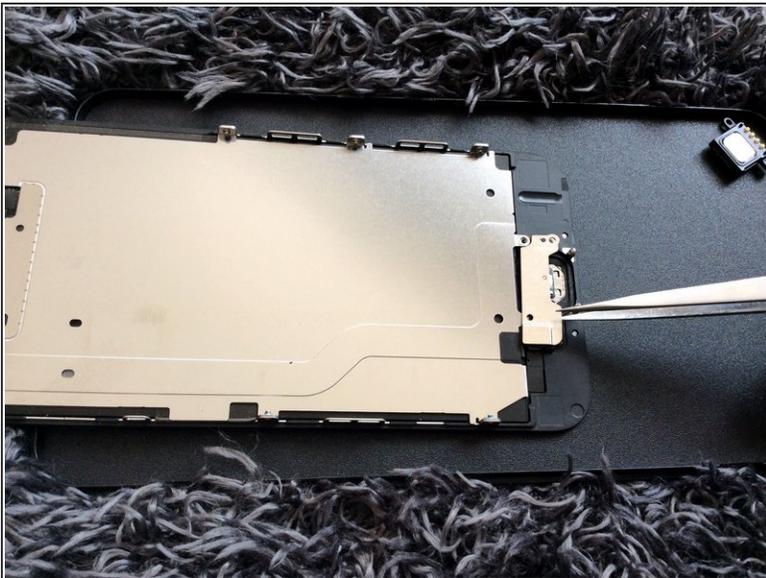

- Remove the home key and metal, around home button is glue, if the computer is open, on the cooling mouth blowing, can push it behind

To reassemble your device, follow these instructions in reverse order.