



Blackberry Bold 9000 Keyboard Replacement

How to replace your keyboard when buttons stop working or fall out.

Written By: Kelly



 **TOOLS:**

- [T5 Torx Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
-

Step 1 — Battery



- Place your BlackBerry facedown in front of you.

Step 2



- Press the cover release button on the bottom of your device. Lift and remove the back cover.

Step 3



- From the top, use your fingernail to lift the battery out.

Step 4 — Rear Case




- Remove the SIM card.

Step 5



- Remove the six 7.0mm Torx screws securing the rear case to the rest of the phone.

Step 6

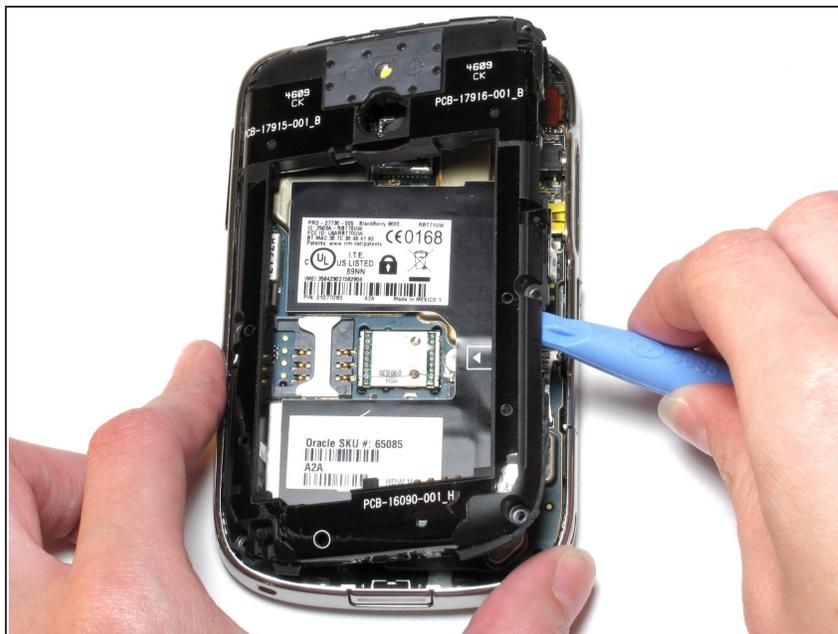

- Use the plastic opening tool to remove the rear case.

Step 7 — Keyboard



- With the same plastic opening tool, lift the motherboard up and out.
- Remove the motherboard assembly from left to right, raise the bottom of the circuit board first, slide back to allow the board to come free of the slot way it is inserted into at the top, and use caution near the audio jack on the right side of the device.

Step 8



- Holding the front cover, push the keyboard in with your thumbs.
- Start at the top two corners, then repeat with the bottom two corners.

To reassemble your device, follow these instructions in reverse order.