



# Blackberry Bold 9000 Antenna Replacement

Instructions on how to install the Blackberry Bold 9000's antenna.

Written By: Jacob



 **TOOLS:**

- [T5 Torx Screwdriver](#) (1)
  - [iFixit Opening Tools](#) (1)
-

## Step 1 — Battery



- Place your BlackBerry facedown in front of you.

## Step 2



- Press the cover release button on the bottom of your device. Lift and remove the back cover.

### Step 3



- From the top, use your fingernail to lift the battery out.

### Step 4 — Rear Case




- Remove the SIM card.

## Step 5




- Remove the six 7.0mm Torx screws securing the rear case to the rest of the phone.

## Step 6

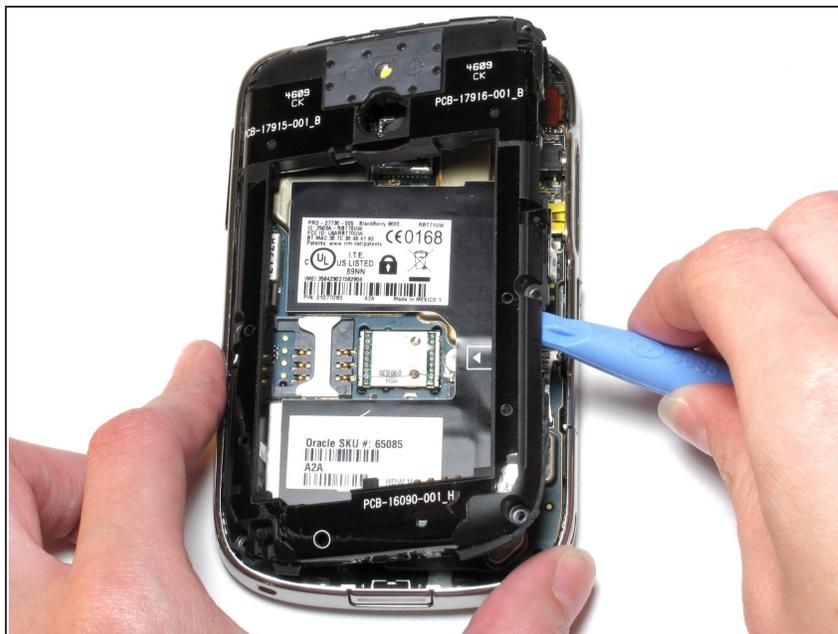

- Use the plastic opening tool to remove the rear case.

## Step 7 — Antenna

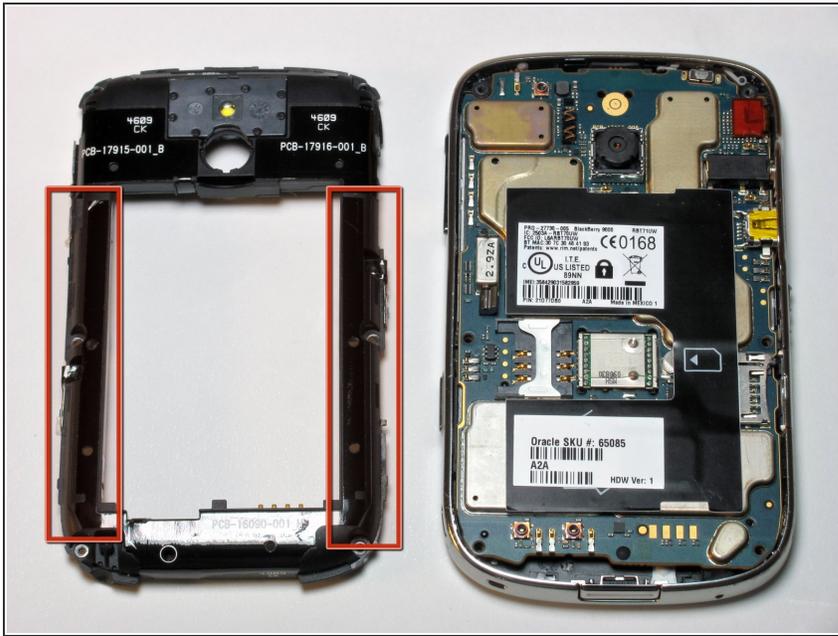

- The two antennas are built into the rear case. Replace this piece to replace the antenna.

To reassemble your device, follow these instructions in reverse order.