

Carrera Mario Copter Rotor Blade Replacement

Remove any of the four rotor blades on the quadrocopter to replace or reposition it.

Written By: Marissa Espino



This document was generated on 2020-11-28 06:11:28 AM (MST).

INTRODUCTION

The quadrocopter will not fly correctly if a rotor blade is damaged or installed wrong. This guide will show you how to remove any of the quadrocopter's four rotor blades.


TOOLS:

۶

• JIS #00 Screwdriver (1)


This document was generated on 2020-11-28 06:11:28 AM (MST).

Step 1 — Rotor Blade

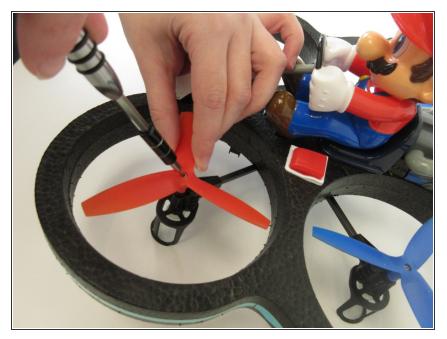

 Using the JIS #00 screwdriver, hold the rotor blade still and unscrew the 4.762mm screw in the center of the blade.

Step 2

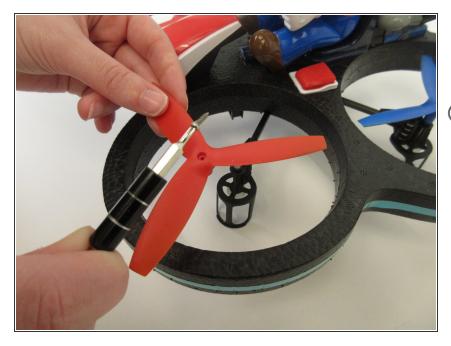

- Lift the screw out and set it aside.
- Lift the rotor blade out.
- Be sure to place the rotor blades properly for stable flight. With the quadrocopter facing you, the front rotor blades should be red with blade A on the right and B on the left. The rear rotor blades should be blue with blade B on the right and A on the left.

To reassemble your device, follow these instructions in reverse order.

This document was generated on 2020-11-28 06:11:28 AM (MST).