


Dell Studio XPS 1647 Memory Module Replacement


Written By: Johnathan Hammond



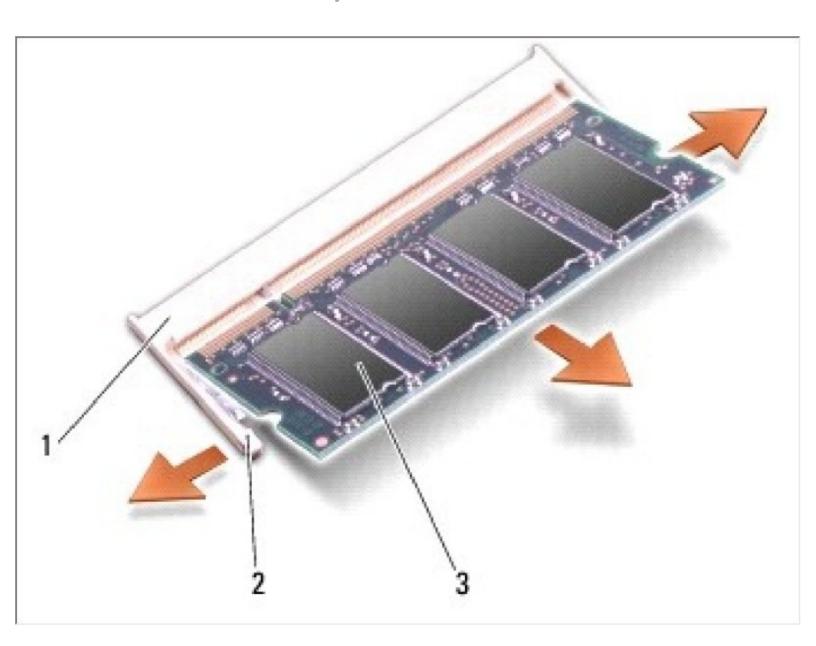

Phillips #0 Screwdriver (1)

Step 1 — Battery

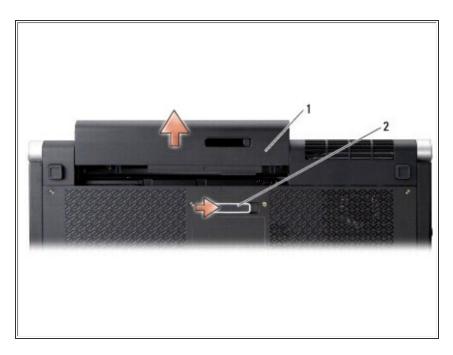


- Slide the battery release latch to the side. {2}
 - Slide the battery out of the battery bay. {1}

Step 2 — Base Cover



 Loosen the ten captive screws on the base cover and lift the cover off the computer at an angle as shown in the figure.

Step 3 — Memory Module

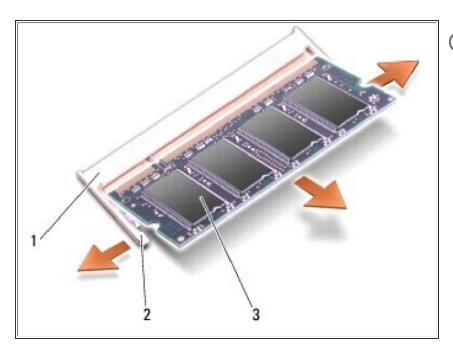

- NOTICE: To prevent damage to the memory module connector, do not use tools to spread the memory module securing clips.
- Use your fingertips to carefully spread apart the securing clips on each end of the memory module connector until the module pops up.
 - Remove the module from the connector.

To reassemble your device, follow these instructions in reverse order.