




Razer Blade RZ09-0130 2015 Fan Replacement

If you hear abnormal noises (or no noise at all...

Written By: Tyler Clayton

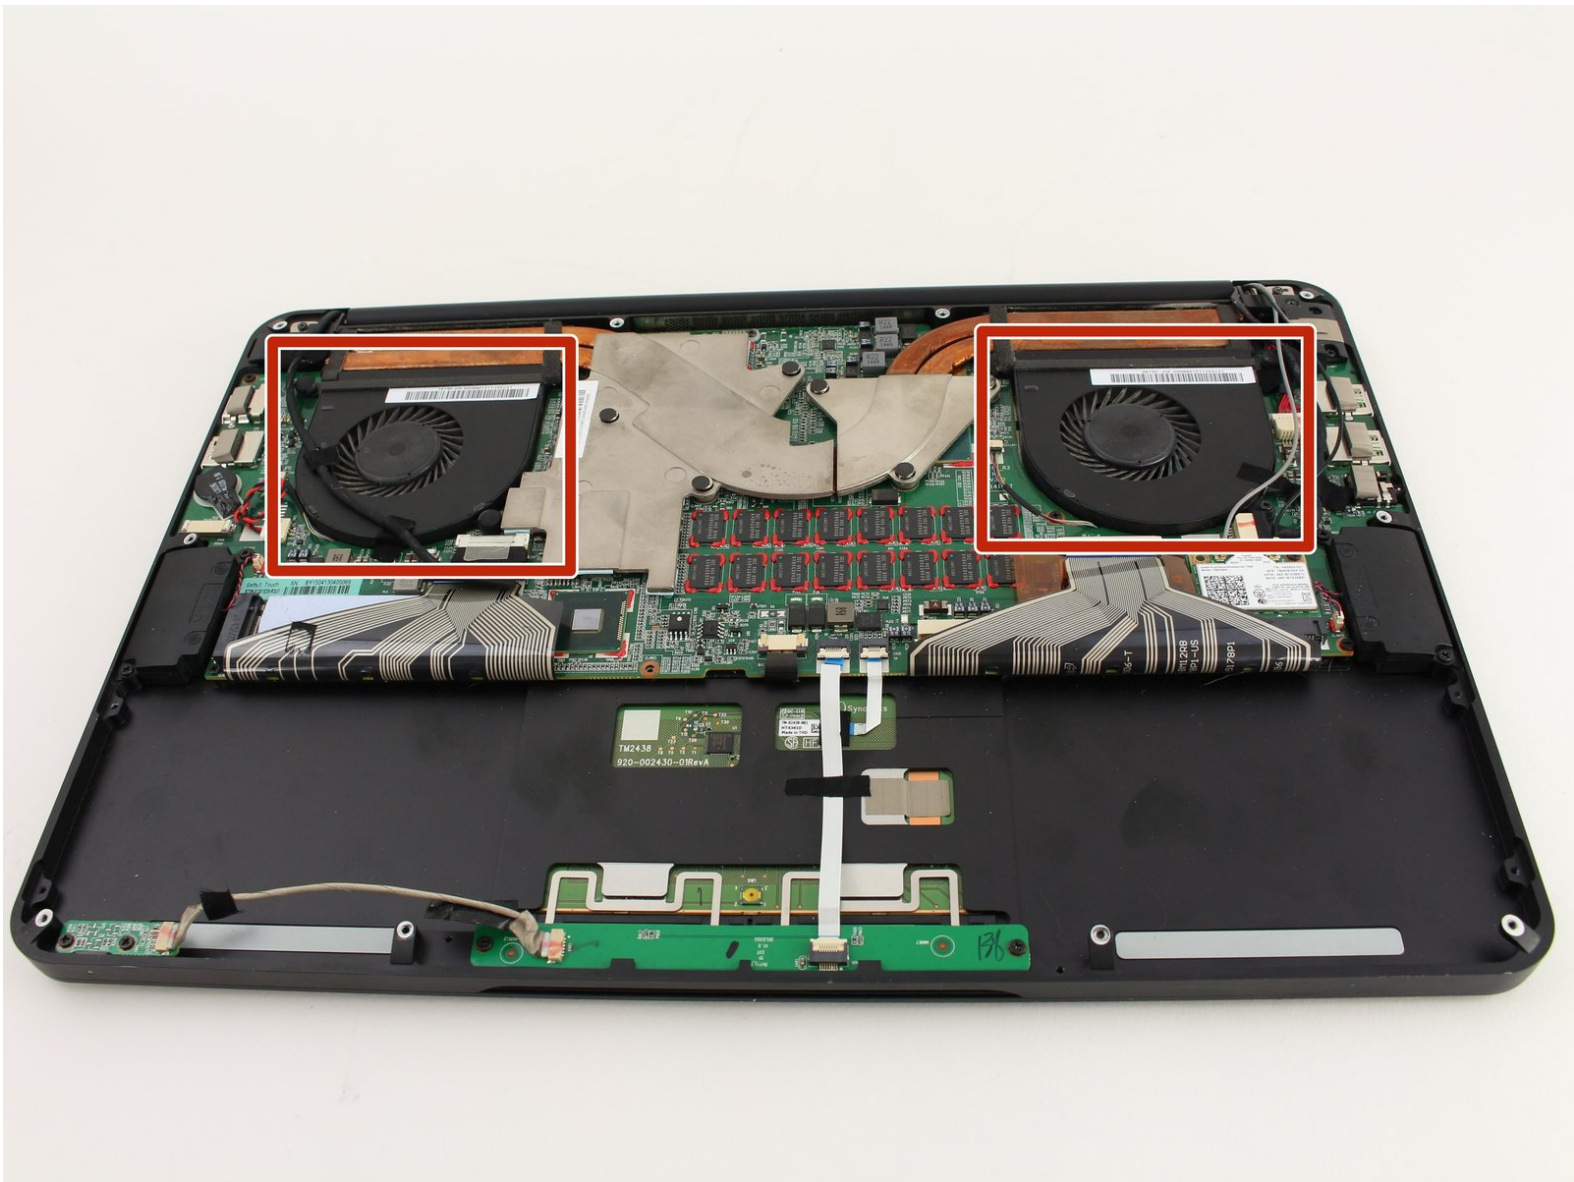

INTRODUCTION

If you hear abnormal noises (or no noise at all consistently) coming from your Razer Blade RZ09-0130 2015 laptop, it is likely that your fans are malfunctioning due to debris or damage. In addition, if your laptop is overheating too much, then your fans are damaged since there is little ventilation. This guide will teach you how to replace the stock fans inside the 2015 Razer Blade. If you believe there is debris in your fans and you are not looking for a full replacement, this guide will also be of use as you will be able to access both fans after applying this procedure. Do not pry off the fans with another object as it will inflict damage and further issues.



TOOLS:

- [T5 Torx Screwdriver](#) (1)
-

Step 1 — Back Panel



⚠ Be sure to power off the device before beginning.



- Use a Torx T5 screwdriver to remove the ten 3 mm screws along the edge of the back panel.

Step 2




- Remove the back panel from the laptop by sliding it away from the hinge.
- ⓘ This device is missing the battery. Make sure to detach the battery connector before proceeding with laptop repairs.

Step 3 — Fan

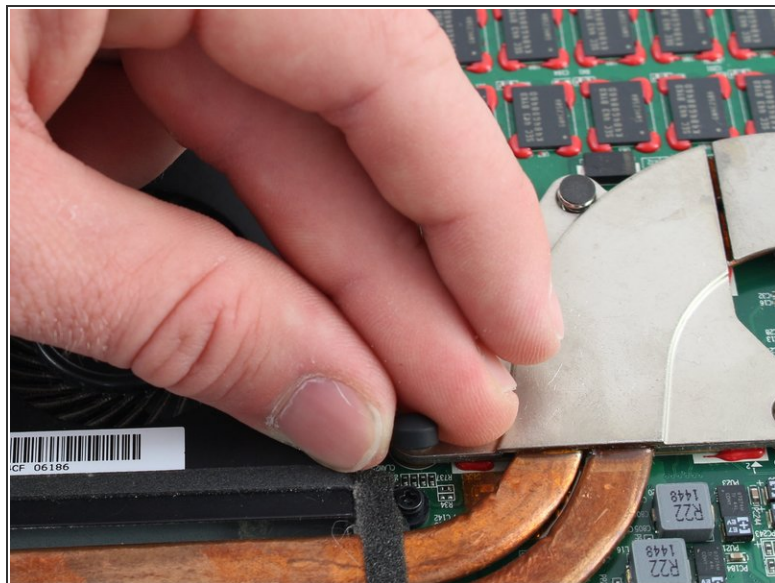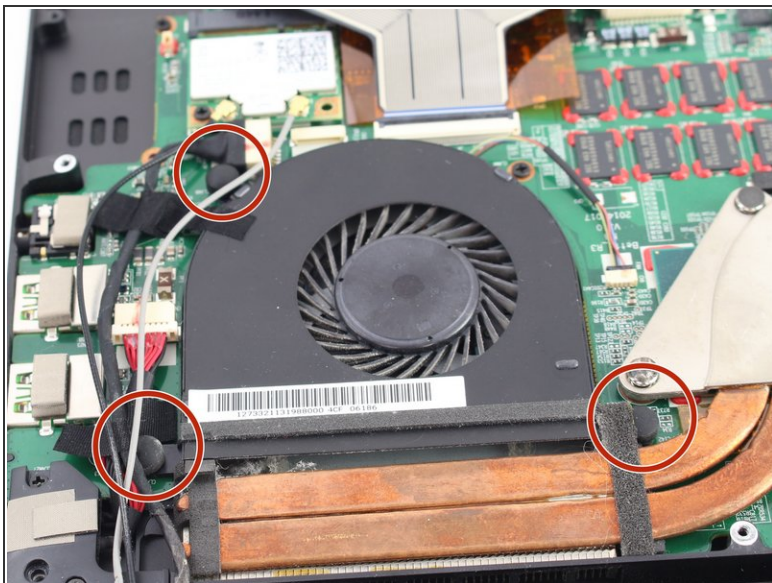


- Remove the three screw caps by pulling them upward with your fingers.

Step 4

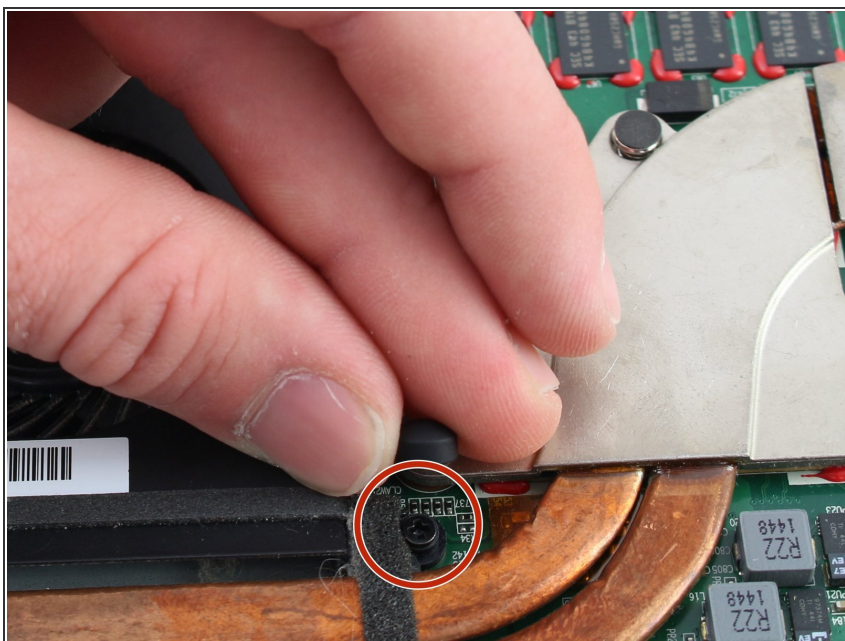


- Remove the three 3mm Phillips #0 screws.

Step 5

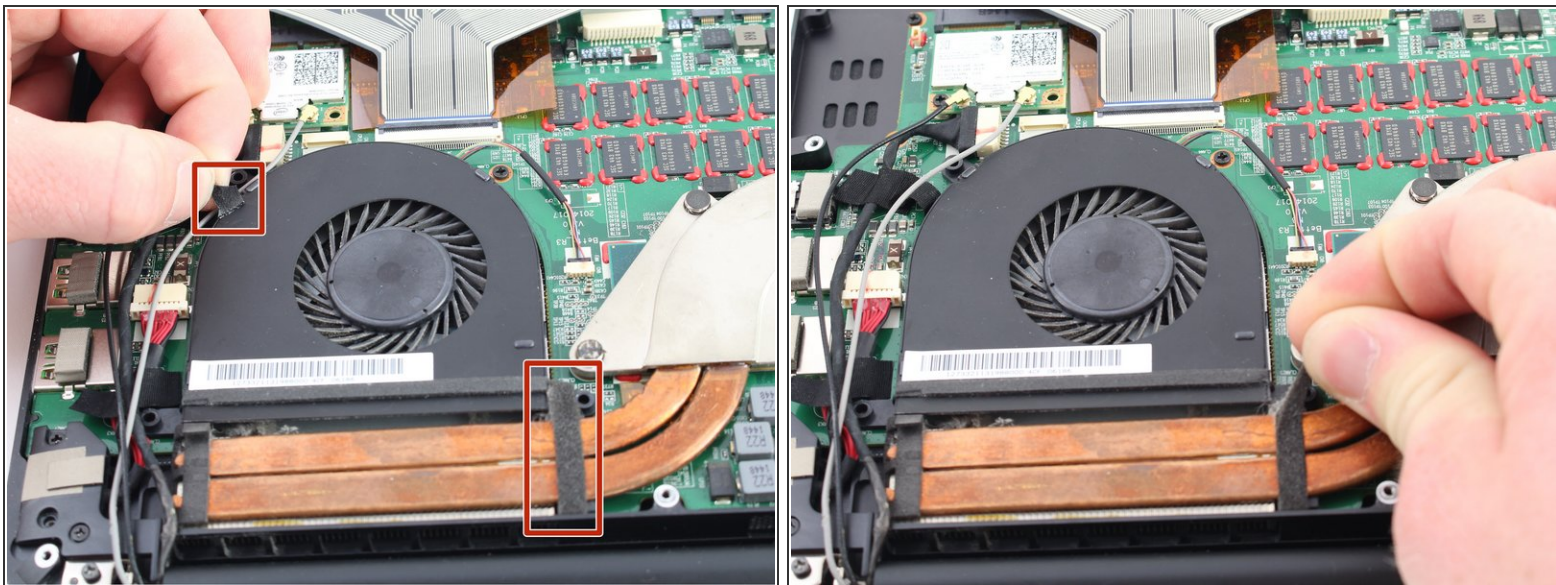


- Peel back the two adhesive strips from the fan until they are removed.

Step 6

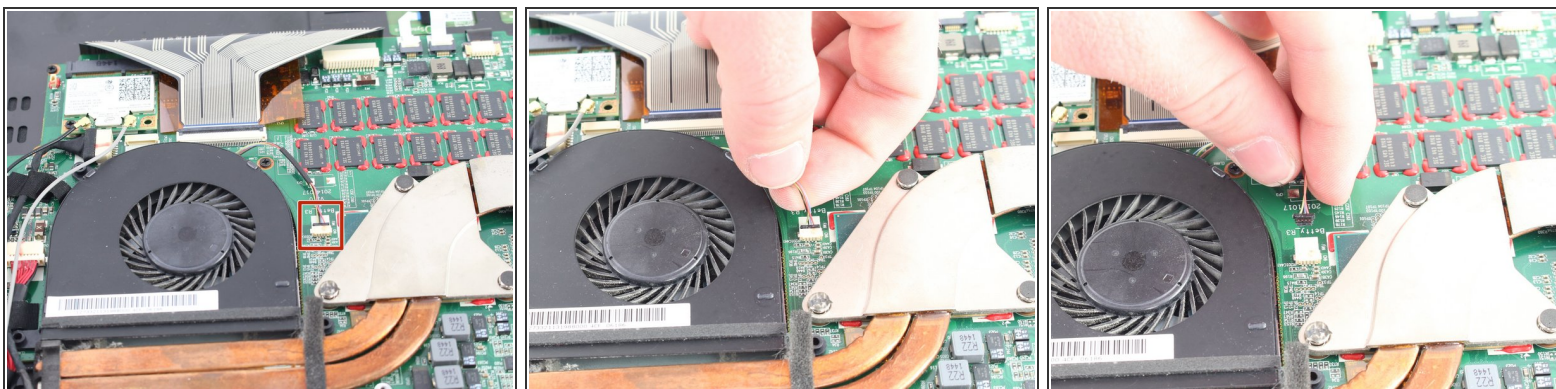


- Remove the connector by pulling it away from the motherboard with your fingers.

Step 7

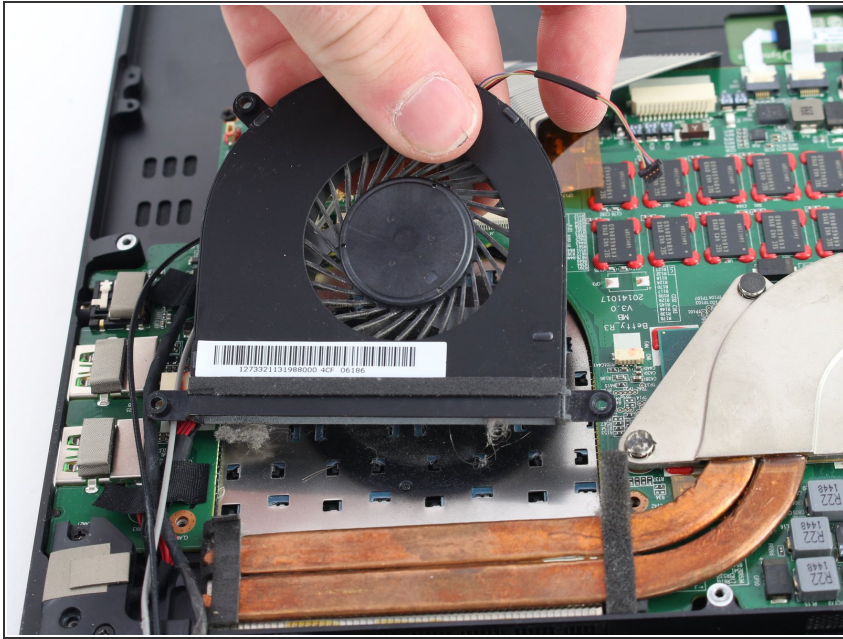

- Holding the rounded edge of the fan, slowly lift upwards until it is removed.

Step 8

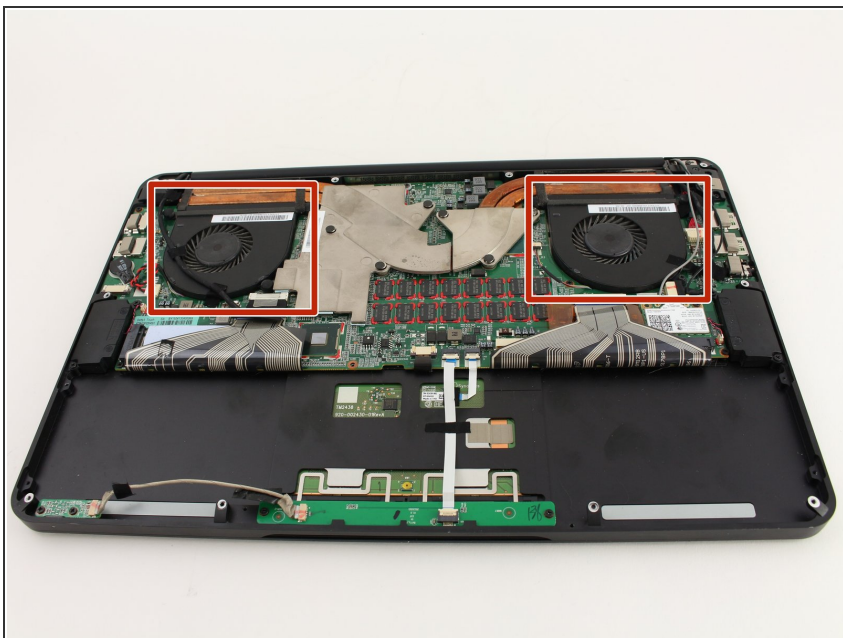

- Repeat the preceding steps to remove the second fan.

To reassemble your device, follow these instructions in reverse order.