

NuVision 10.1 Atom Battery Replacement

How to access and replace the battery in your NuVision 10.1 Atom.

Written By: Carly Daniele



INTRODUCTION

Make sure to be very careful when handling the battery, lithium batteries are prone to exploding when bent or punctured. If the device is experiencing a short life span or any other issues regarding the battery, follow this guide to replace the battery.

TOOLS:

- Tweezers Pro/ESD/Angled (1)
- Phillips #000 Screwdriver (1)
- iFixit Opening Tools (1)

Step 1 — Camera



- Turn the device screen side down.
- Carefully remove the back piece with the iFixit opening tool.

Step 2




 Remove the yellow tape covering the motherboard gently with your fingers.



- Pull the camera plug upward and away from the motherboard with your fingers.
- Gently pull the camera from the device. The camera is held by tension.

Step 4 — Speaker

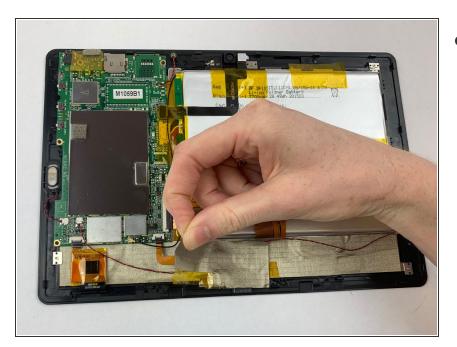

 Carefully remove silver tape with your fingers.



- Remove speakers gently using your fingers, they pop out easily.
- Disconnect cords attached to the speaker from white pod.

Step 6 — Motherboard



 Disconnect the press-fit black and red curly wire from where it connects on the motherboard.



• Gently remove the battery's three ZIF connectors from the motherboard. Use your fingers.

A Be careful not to puncture the battery.

Step 8




• Disconnect the battery's bundled cable connector from the motherboard with fingers.



 Remove the four black 3.32mm screws on the corners of the motherboard using the Phillips #000 screwdriver. The motherboard should come out easily.

Step 10 — Battery

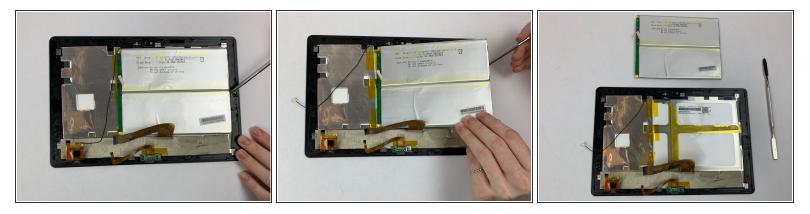

 Pry the battery away from the display screen gently using a nylon spudger or the plastic opening tools.

1 Using a metal spudger may bend or puncture the battery. Lithium batteries are prone to explode.

(i) There is a lot of adhesive, take your time and be careful.

To reassemble your device, follow these instructions in reverse order.