




# Pantech Matrix Keypad Replacement

This guide provides step-by-step instructions on how to properly replace the keypad of the Pantech Matrix C740.

Written By: Zeel Patel

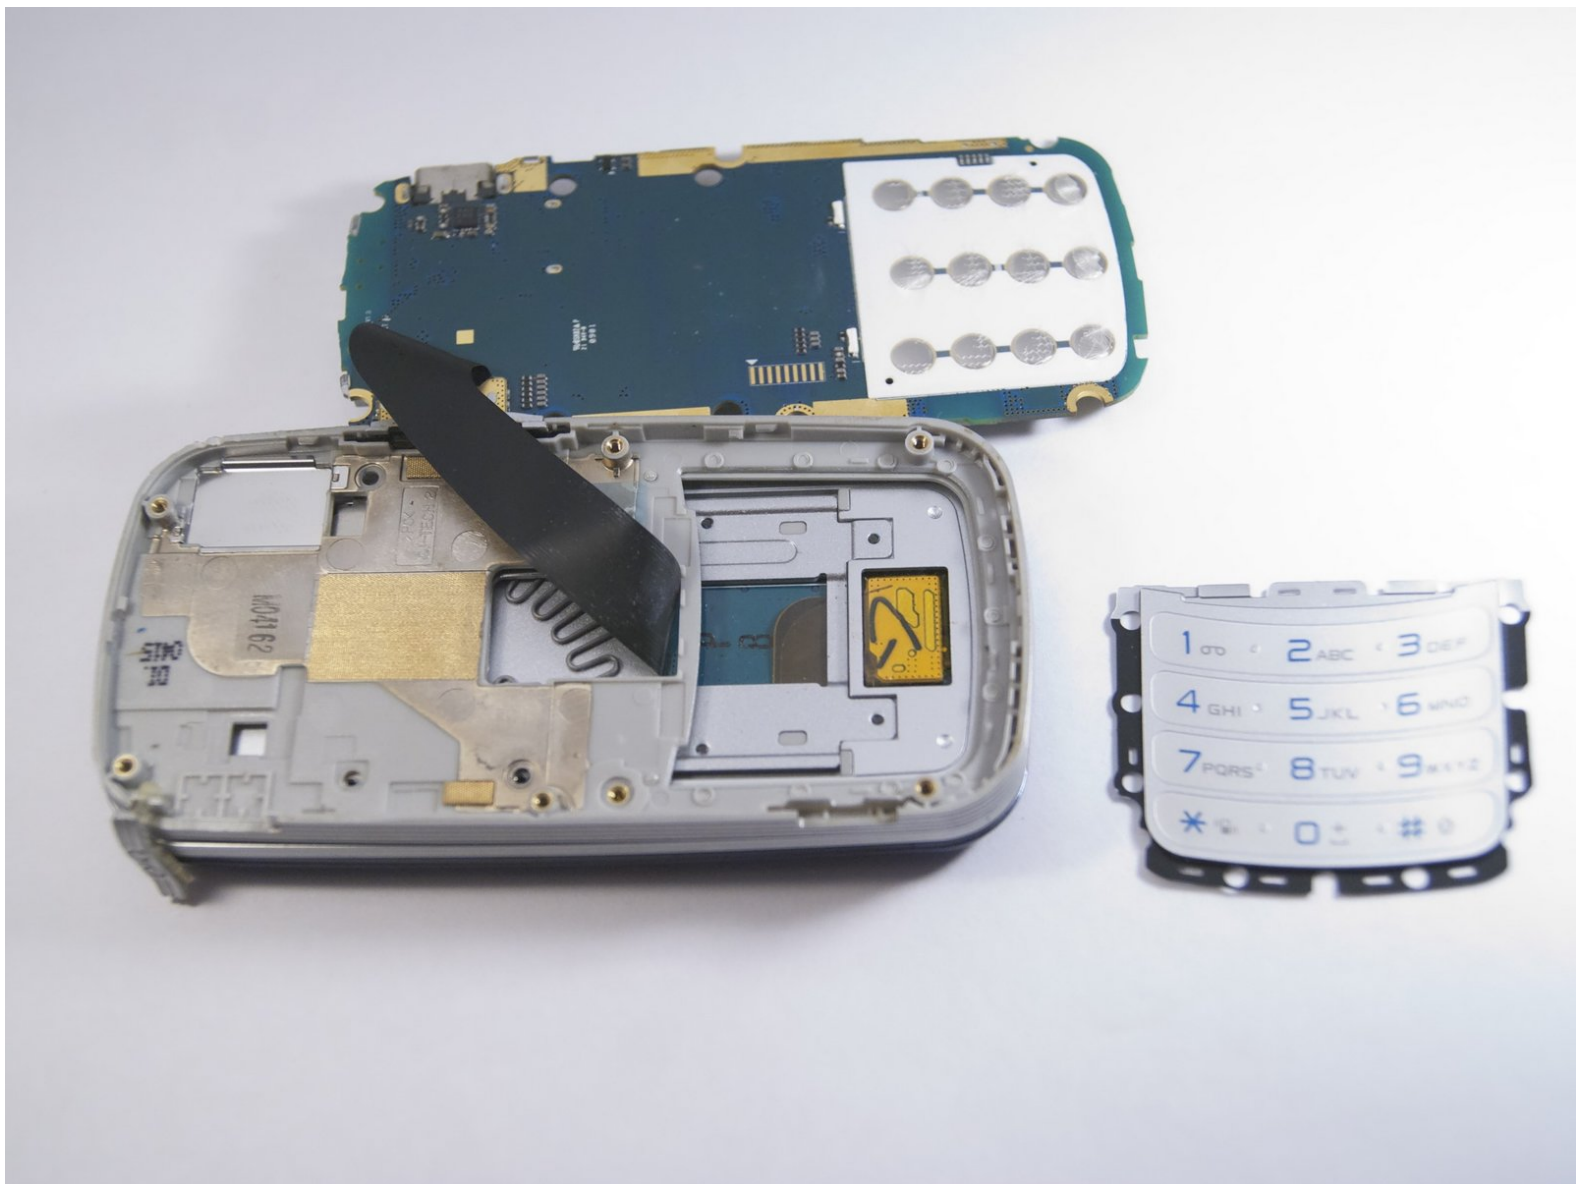

---

## INTRODUCTION

The keypad of Pantech Matrix C740 functions as the mechanism for dialing numbers and typing on the device ; however, faulty functioning of the keypad may cause the device to not dial numbers or type words. Therefore, this guide serves as an aid in the replacement of the keypad for the Pantech Matrix C740.



### TOOLS:

- [Spudger](#) (1)
  - [Phillips #000 Screwdriver](#) (1)
-

## Step 1 — Phone Orientation



- Place phone with screen side facing toward you.

## Step 2 — Phone Orientation



- Flip phone over so screen side is now facing down.

### Step 3 — Remove Back Cover



- Gently slide the backside phone cover off exposing the battery underneath.

### Step 4 — Lift Battery



- Carefully lift the battery up from where the spudger is pointed.

## Step 5 — Remove Battery



- Remove the battery from its dock.

## Step 6 — Slide SIM Card Out



- Slide the SIM Card out of its dock.

## Step 7 — Remove Phone Screws



- Use a Phillips screwdriver to remove the four 2mm Phillips #000 screws from each corner of the device.




## Step 8 — Remove Phone Casing



- Rotate the phone so the base is facing you.
- Use spudger to separate phone casing and inside as shown.
- Remove the casing carefully and set aside.

## Step 9 — Remove Camera Screws

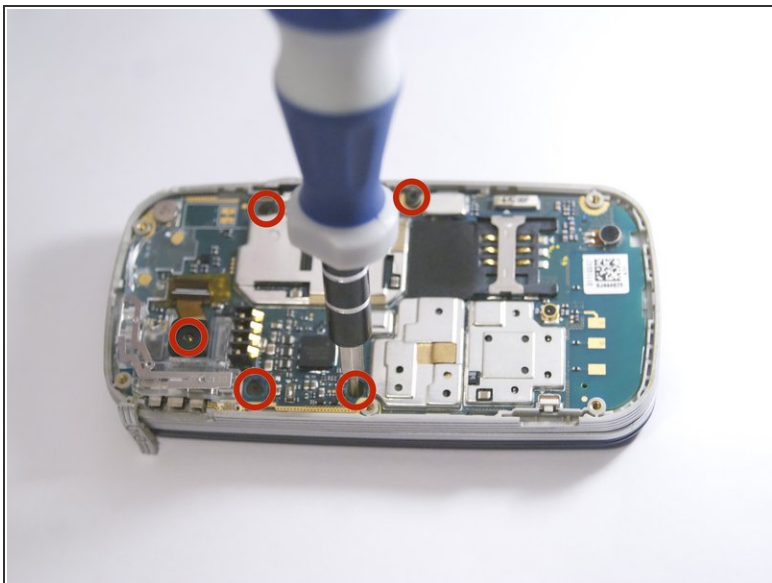

- Place phone with exposed motherboard facing you.
- Use a Phillips screwdriver to remove the five 2mm Phillips #000 screws holding the camera in place.



## Step 10 — Expose Keypad



- Carefully lift up the motherboard to expose the back of the keypad.



## Step 11 — Remove Keypad

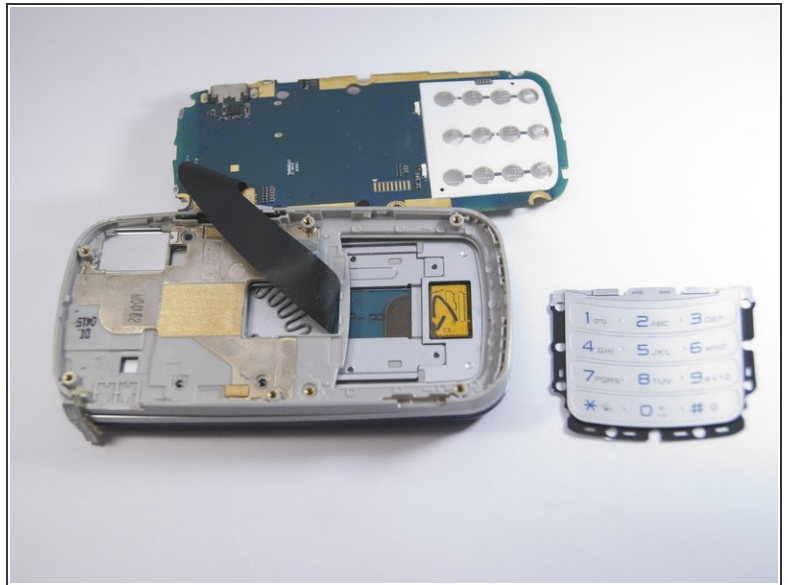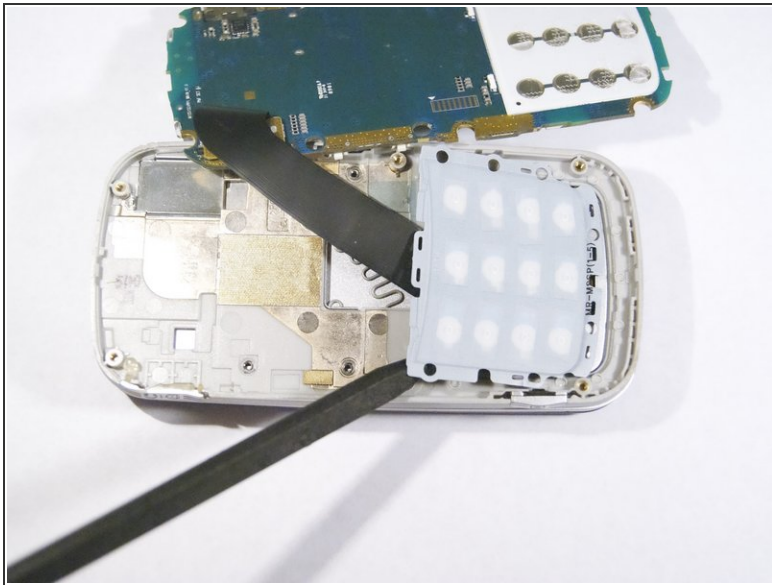

- Use spudger to gently pry the keypad away from the rest of the phone.

To reassemble your device, follow these instructions in reverse order.